
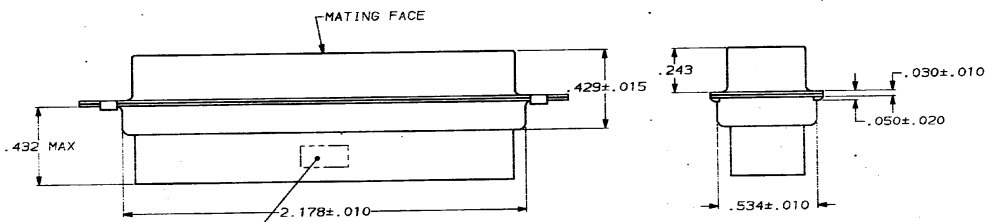


DRAWING MADE IN THIRD ANGLE PROJECTION
 THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

REVISES				DATE	APPD
BY	DATE	DESCRIPTION			
BD	39	0 REL WAS B7-4870-17			

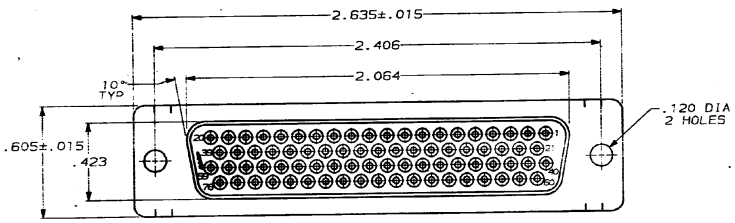

AMP, PART NO & DATE CODE, MARKED IN AREA INDICATED, ON FAR SIDE

- CONNECTOR ACCEPTS SIZE 22 DF SOCKET CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- ▲ FLAME RETARDANT 94V-0 RATED GLASS FILLED NYLON, COLOR: BLACK.
 - ▲ STEEL PER ASTM A109.
 - ▲ TIN PLATED PER MIL-T-10727.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON 1 2 3 PL C DEC = .005 ANGLES = 2°		DDC <i>C. Filand 1/12/88</i> CHK <i>W. S. ...</i> APPD <i>P. ... 1/11/88</i> APPD <i>V. Kumar 1/19/88</i>		748569-1 PART NO	
MATERIAL MOLDED PARTS: ▲ SHELLS: ▲		AMP AMP INCORPORATED Morrisburg, Pa. 17068		NAME RECEPTACLE CONNECTOR, SIZE 5, 78 POSN., AMPLIMITE® HDP-22	
FINISH SHELLS: ▲		APPLICATION SPEC SIZE C 00779 WEIGHT	FSCN NO 00779	DRAWING NO 748569	SHEET 1 OF 1

CUSTOMER DRAWING

748569

AMP 1071-6 REV 2-87