


REVISIONS		DATE APPROVED
P	ZONE/ITER	DESCRIPTION
1	0	RELEASED WAS 86-5520-3
2	1	REV PER ECN B02328
3	2	REV PER ECN B04324
4	3	REV PER ECN B04814
5	4	REVISED PER ECN B06133

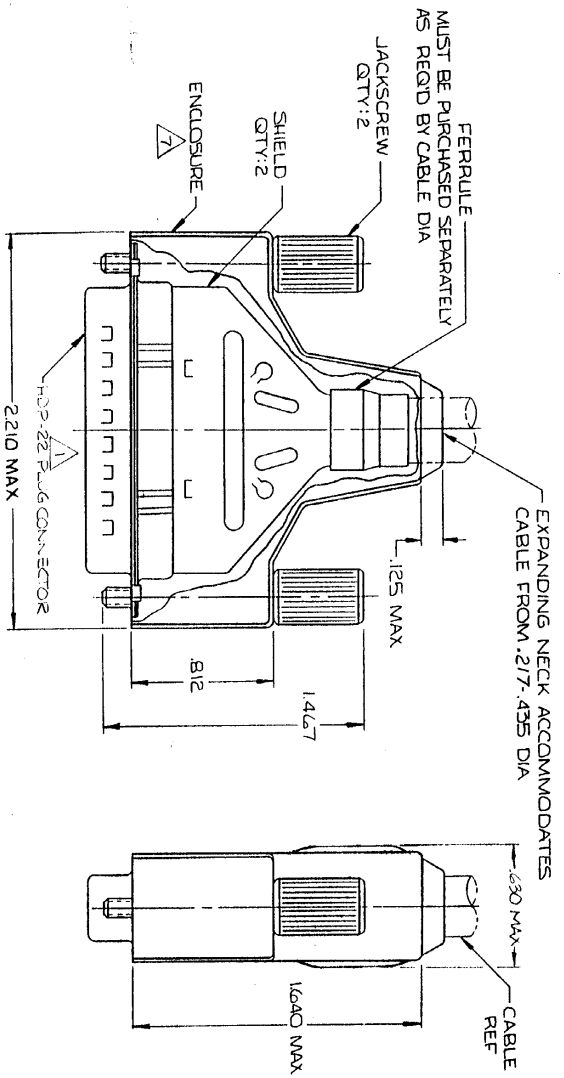

1. PLUG ACCEPTS SIZE 22 DF PIN CONTACTS, CONTACTS MUST BE PURCHASED SEPARATELY.
2. ALL PARTS SHIPPED UNASSEMBLED, EACH PART INDIVIDUALLY BULK PACKED.
3. FLAME RETARDANT 94V-0 RATED, GLASS FILLED NYLON, COLOR: BLACK.
4. STEEL PER ASTM A109.
5. TIN PLATING PER MIL-T-10727.
6. ZINC PLATING PER ASTM B633, TYPE II, CLASS SCI, BLACK CHROMATE.
7. FLAME RETARDANT 94V-0 RATED, STYRENE POLYOLEFIN OR PVC, COLOR: BLACK.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON: DECIMALS ± .020 ANGLES		CONTRACT NO. 428-87	
MATERIAL: ZINC ALLOY		DR. 4/30/87	
SHELLS & SHIELDS: ZINC ALLOY		CHK. 4/30/87	
INSERT: HDP-222		DESIGN APPD. 4/30/87	
FINISH: JACKSCREWS: ZINC ALLOY		OTHER APPD.	
JACKSCREWS: ZINC ALLOY		NAME: SHIELDING ENCLOSURE KIT, PLUG, SIZE 3, 44 POSN, AMPULITE® HDP-222	
SCALE: 2:1		SIZE: FCQM NO. 00779	
SHEET 1 OF 1		DRAWING NO. 748475	

748475

CUSTOMER DRAWING