
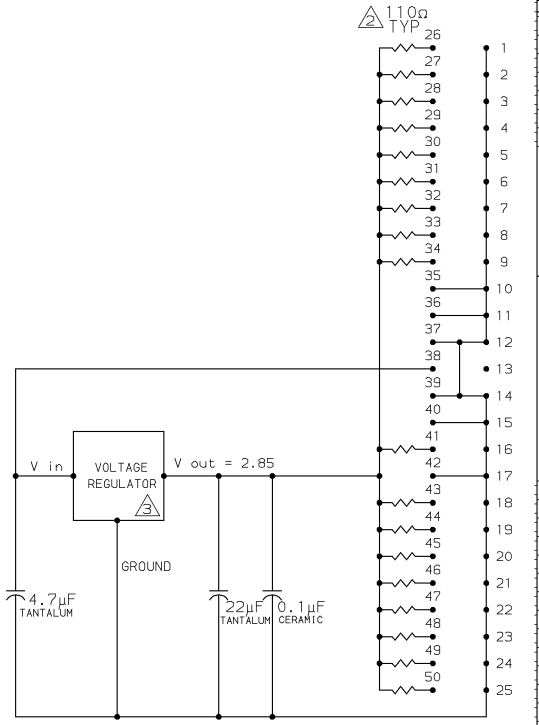
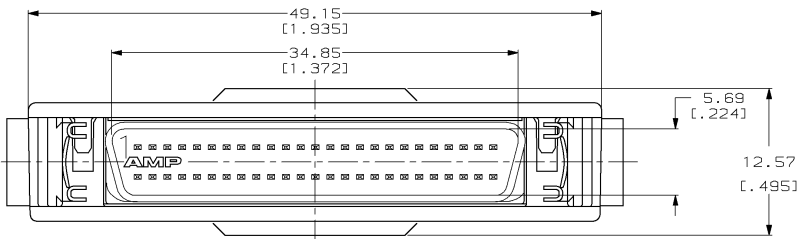


DRAWING MADE IN THIRD ANGLE PROJECTION
 THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
BD	62					D REV PER EC 0020-790-95	23 OCT 95	RF
						E REVISED PER EC 0420-86-97	08 SEP 97	JV

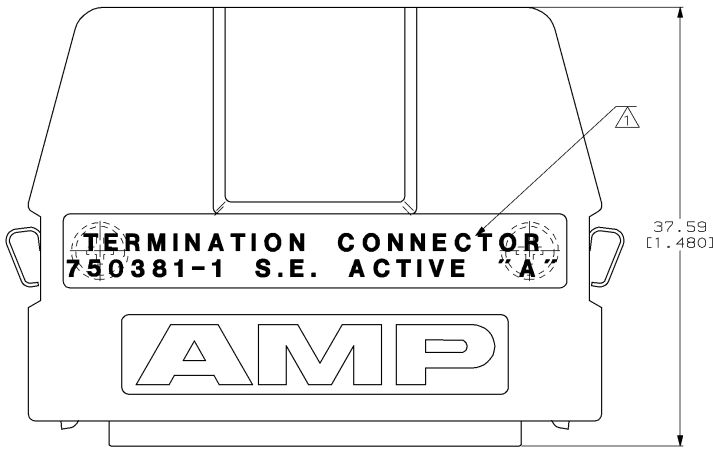

- ⚠ MARKING LABEL APPROXIMATELY AS SHOWN.
- ⚠ RESISTOR TOLERANCE: $\pm 2.5\%$.
- ⚠ VOLTAGE REGULATOR TO MEET ALL SCSI SINGLE-ENDED ACTIVE REQUIREMENTS.

AS SHOWN		750381-1	
REMARKS		PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON + 2 PLC DEC # - 3 PLC DEC $\pm .25$ [.010] ANGLES \pm -		AMP INCORPORATED Murrysburg, Pa. 17105	
DR 9/1/89 S.G. SMITH		NAME	
CHK 9/1/89 K. ULERY		TERMINATION CONNECTOR AMPLIMITE .050 Series 50 POSN, PLUG	
APPD 9-18-90 D.L. CLOUSER		SIZE	CAGE CODE
APPD 9/1/89 E. MYERS		C	00779
PRODUCT SPEC		DRAWING NO	750381
MATERIAL HOUSING: ZINC DIE CASTING CONTACT: PHOS BRONZE INSERT: THERMOPLASTIC RESISTOR: THICK FILM NETWORK ON ALUMINA SUBSTRATE LATCHES: STAINLESS STEEL		SCALE	SHEET
FINISH HOUSING: NICKEL OVER COPPER CONTACT: SO-2 GOLD OVER NICKEL LATCHES: NONE		4:1	1 OF 1
APPLICATION SPEC		CUSTOMER DRAWING	
WEIGHT			