


- NOTES**
- △ MATERIAL HOUSING : GLASS REINFORCED POLYESTER THERMOPLASTIC UL 94 V0 RATED, BLACK CONTACT : PHOS BRONZE
  - △ CONTACTS, MATTE TIN PLATED
  - 3 CONNECTOR WILL ACCEPT FLEXIBLE PRINTED CIRCUIT OR FLAT FLEXIBLE CABLE ON 2.54 (1.00) CENTERS IN A THICKNESS RANGE OF 0.127 TO 0.508 (0.005 TO .015) IN CONTACT AREA
  - △ STAND-OFFS PREVENT SOLVENT ENTRAPMENT
  - △ LEAD-IN ON PINS FOR EASE OF INSERTION INTO BOARD
  - △ SEQUENTIAL CONTACTS REDUCE CABLE INSERTION FORCE
  - △ ALTERNATING CONTACT FORM RETAINS CONNECTOR IN P.C. BOARD DURING SOLDER OPERATION
  - B ACCEPTS CABLE OR CIRCUITRY WITH EXPOSED CONDUCTORS FACING TOWARD OR AWAY FROM THE BOARD SURFACE
  - D REFER TO APPLICATION SPEC 114-2062
  - △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

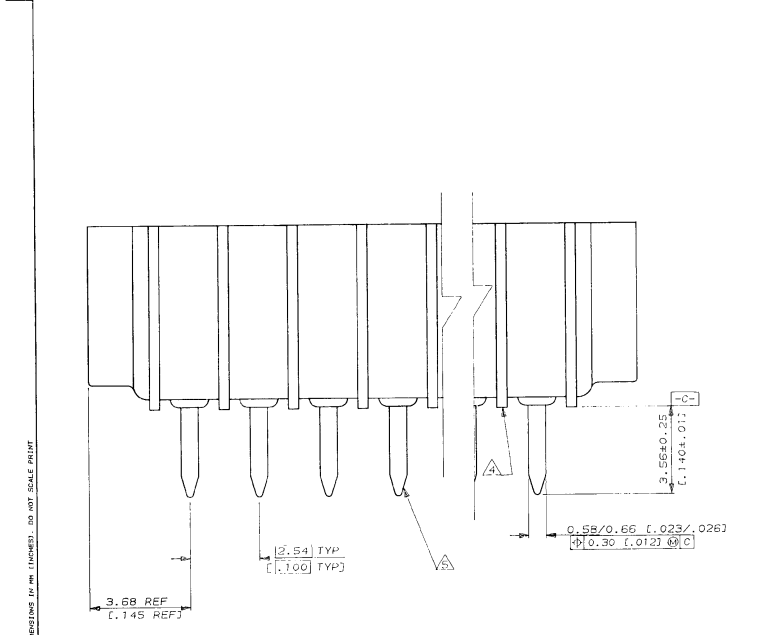

|                       |               | LEAD FREE     |    |            |  | SUPERSEDED |  |
|-----------------------|---------------|---------------|----|------------|--|------------|--|
| 7-520315-2            | 60.78 [2.393] | 58.62 [2.308] | 22 | 2-520315-2 |  |            |  |
| <del>4-520315-1</del> | 58.24 [2.293] | 56.08 [2.208] | 21 | 2-520315-1 |  |            |  |
| 7-520315-0            | 55.70 [2.193] | 53.54 [2.108] | 20 | 2-520315-0 |  |            |  |
| 6-520315-9            | 53.17 [2.093] | 51.00 [2.008] | 19 | 1-520315-9 |  |            |  |
| <del>5-520315-8</del> | 50.62 [1.993] | 48.46 [1.908] | 18 | 1-520315-8 |  |            |  |
| 6-520315-7            | 48.08 [1.893] | 45.92 [1.808] | 17 | 1-520315-7 |  |            |  |
| 6-520315-6            | 45.54 [1.793] | 43.38 [1.708] | 16 | 1-520315-6 |  |            |  |
| 6-520315-5            | 43.00 [1.693] | 40.84 [1.608] | 15 | 1-520315-5 |  |            |  |
| 6-520315-4            | 40.46 [1.593] | 38.30 [1.508] | 14 | 1-520315-4 |  |            |  |
| 6-520315-3            | 37.92 [1.493] | 35.76 [1.408] | 13 | 1-520315-3 |  |            |  |
| 6-520315-2            | 35.38 [1.393] | 33.22 [1.308] | 12 | 1-520315-2 |  |            |  |
| 6-520315-1            | 32.84 [1.293] | 30.68 [1.208] | 11 | 1-520315-1 |  |            |  |
| 6-520315-0            | 30.30 [1.193] | 28.14 [1.108] | 10 | 1-520315-0 |  |            |  |
| 5-520315-9            | 27.76 [1.093] | 25.60 [1.008] | 9  | 520315-9   |  |            |  |
| 5-520315-8            | 25.22 [0.993] | 23.06 [0.908] | 8  | 520315-8   |  |            |  |
| 5-520315-7            | 22.68 [0.893] | 20.52 [0.808] | 7  | 520315-7   |  |            |  |
| 5-520315-6            | 20.14 [0.793] | 17.98 [0.708] | 6  | 520315-6   |  |            |  |
| 5-520315-5            | 17.60 [0.693] | 15.44 [0.608] | 5  | 520315-5   |  |            |  |
| 5-520315-4            | 15.06 [0.593] | 12.90 [0.508] | 4  | 520315-4   |  |            |  |
| 5-520315-3            | 12.52 [0.493] | 10.36 [0.408] | 3  | 520315-3   |  |            |  |
| 5-520315-2            | 9.98 [0.393]  | 7.82 [0.308]  | 2  | 520315-2   |  |            |  |

| PART NO |                       | B   | A    | POS  | PART NO |
|---------|-----------------------|-----|------|------|---------|
| LD      | REV PER ECO-10-000445 | KK  | AED  | DATE |         |
| UD      | REVISED ECR-08-004332 | PM  | KS   | DATE |         |
| UI      | REVISED FR00-002-05   | SD  | PCH  | DATE |         |
| U       | REVISED FR00-001-04   | SD  | PCH  | DATE |         |
| T       | REVISED DIVEC 0799    | LVY | DATE |      |         |
| S       | PROGRAM DIVEC0042     | RT  | DATE |      |         |
| LTx     | REVISION RECORD       | DR  | DATE |      |         |

(CUSTOMER DRAWING)

PRINT DATE

DIMENSIONS IN IN. UNLESS NOT OTHERWISE SPECIFIED

METRIC 520315