

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	QTY	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	J	REVISED PER 0A00-0314-99	16APR01	TA SB

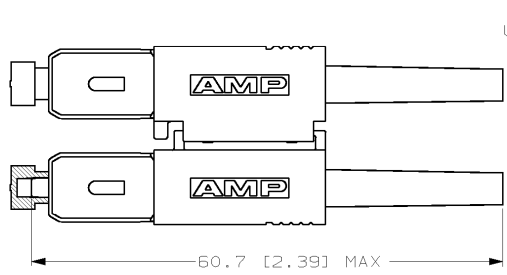

BLACK PVC TUBING
 USED WITH CABLES LESS
 THAN 3.0mm [.12]
 (-1, & -2)

STRAIN RELIEF
 (-1, & -2)

INNER EYELET
 (-1, & -2)

CRIMP EYELET
 (-1, & -2)

PLUG ASSEMBLY
 (-1, -2, & -3)

DUPLEX CLIP HOUSING
 (-1, -2, & -3)

DUST COVER
 (-1, -2, & -3)

BARE BUFFER BOOT
 (-1, -3)

TUBING, HYTREL
 (-1, -3)

MATERIAL:

- PLUG BODY: THERMOPLASTIC, BEIGE
- CLIP HOUSING: THERMOPLASTIC, BEIGE
- INTERNAL BODY: BRASS
- CRIMP EYELET: COPPER
- INNER EYELET: BRASS
- STRAIN RELIEF/BOOT: THERMOPLASTIC ELASTOMER, BEIGE
- CAPILLARY: ZrO₂

FINISH:

- INTERNAL BODY: ELECTROLESS NICKEL
- CRIMP EYELET: TIN

- 3. DIMENSIONS IN [] ARE IN INCHES.
- 4. INSTRUCTION SHEET #408-4066

SAME AS 503693-1 EXCEPT THERE IS NO HYTREL TUBING NOR BARE BUFFER BOOT AND ONE STRAIN RELIEF IS BEIGE AND THE OTHER IS BLUE. KIT IS FOR USE WITH 2.0mm TO 3.0mm JACKETED CABLE.

FOR 250/900µm APPLICATION, TERMINATION MAY REQUIRE USE OF INSERTION TOOL P/N 492042-1.

503693-1 CONTAINS ALL PARTS SHOWN AND CAN BE USED WITH 2.0mm TO 3.0mm JACKETED CABLE, 900 µm BARE BUFFERED FIBER OR 250µm COATED FIBER. THE STRAIN RELIEFS AND BARE BUFFER BOOTS ARE BEIGE.

INSERTION TOOL, P/N 492042-1 MAY BE REQUIRED WHEN TERMINATING TO 900µm BARE BUFFERED FIBER OR 250µm COATED FIBER.

PART NUMBER 503693-3 IS SUPERCEDED BY 503693-1.

6	8	125±2µm	503693-3
5		125±2µm	503693-2
7		125±2µm	503693-1
FIBER SIZE			PART NO

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm		9 PLC	±.01
		1 PLC	±.01
		2 PLC	±0.13(.005)
		3 PLC	±.01
		4 PLC	±.01
		ANGLES	±1°
		FINISH	

AMP Incorporated		Harrisburg, PA 17105-3608	
KIT, CONNECTOR, AMP LightCrimp SC DUPLEX, MULTIMODE			
SIZE	CAGE CODE	DRAWING NO	
A3	00779	C-503693	
CUSTOMER DRAWING		SCALE	SHEET OF REV
		2:1	1 1 J