


REV. NO.		DATE		DESCRIPTION		DATE	BY	APP'D
CE	16	F	LTR					
		K	REV PER	0A00-0290-01		19OCT01	DDE	SB

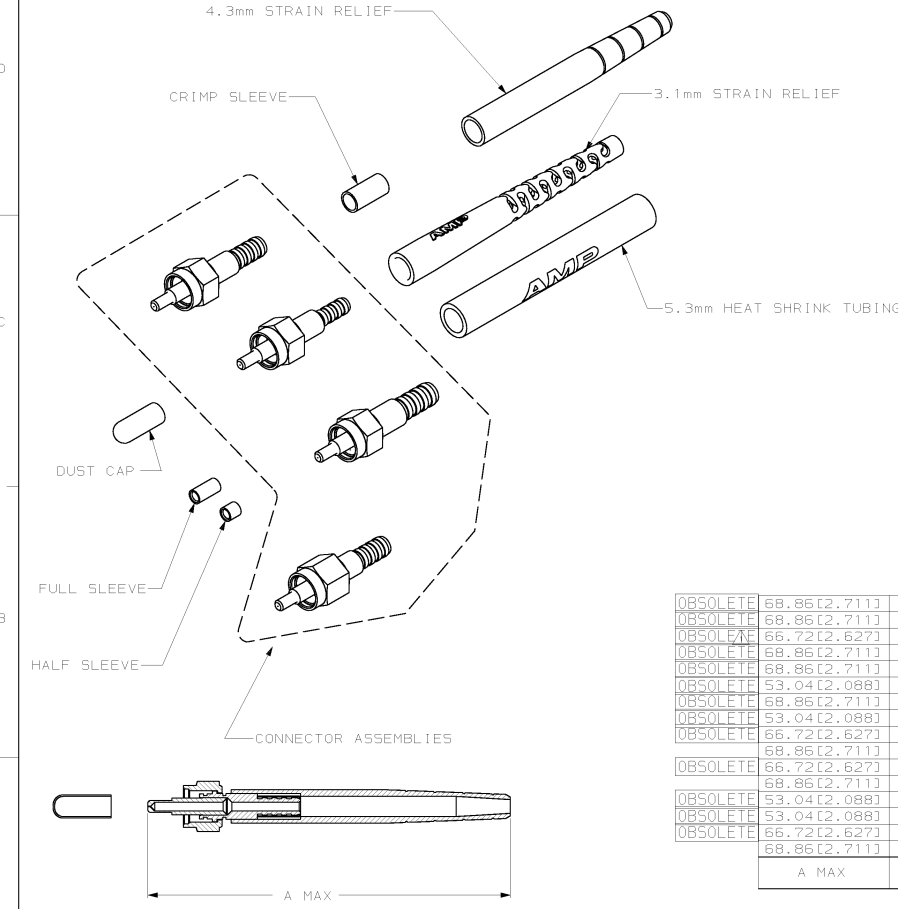

- 1 BULK PACKAGED 50 PER UNIT.
- 2 PACKAGE MUST BE MARKED "KANNEGIETER CODE CGV 0103"
- 3 MATERIAL
 - a) BODY: BRASS
 - b) FERRULE: STAINLESS STEEL
 - c) NUT: BRASS
 - d) CRIMP SLEEVE: BRASS
 - e) DUST CAP: VINYL, COLOR, RED
 - f) HALF & FULL SLEEVE: DELRIN, COLOR, WHITE
- 4 MATERIAL
 - a) BODY: STAINLESS STEEL
 - b) FERRULE: STAINLESS STEEL
 - c) NUT: BRASS
 - d) CRIMP SLEEVE: BRASS
 - e) DUST CAP: VINYL, COLOR, RED
 - f) HALF & FULL SLEEVE: DELRIN, COLOR, WHITE
- 5 FINISH
 - a) BODY, NUT, CRIMP SLEEVE: NICKEL PLATE
- 6 FINISH
 - a) NUT, CRIMP SLEEVE: NICKEL PLATE
- 7 3.1mm STRAIN RELIEF: THERMOPLASTIC ELASTOMER, CLR,BLACK
- 8 4.1mm STRAIN RELIEF: VINYL, COLOR,BLACK
- 9 5.3mm HEAT SHRINK TUBING: POLYOLEFIN, COLOR, BLACK

OBSOLETE	68.86[2.7111]	7	436µm	3.1mm MAX	7	7	2-504014-5
OBSOLETE	68.86[2.7111]	7	229µm	3.1mm MAX	7	7	2-504014-4
OBSOLETE	66.72[2.6273]	8	140µm	4.3mm MAX	8	8	2-504014-3
OBSOLETE	68.86[2.7111]	7	240µm	3.1mm MAX	7	7	2-504024-1
OBSOLETE	68.86[2.7111]	7	600µm	3.1mm MAX	7	7	2-504014-0
OBSOLETE	53.04[2.0881]	9	240µm	5.3mm MAX	9	9	1-504014-9
OBSOLETE	68.86[2.7111]	7	140µm	3.1mm MAX	7	7	1-504014-4
OBSOLETE	53.04[2.0881]	9	140µm	5.3mm MAX	9	9	1-504014-2
OBSOLETE	66.72[2.6273]	8	140µm	4.3mm MAX	8	8	1-504014-1
OBSOLETE	68.86[2.7111]	7	140µm	3.1mm MAX	7	7	1-504014-0
OBSOLETE	66.72[2.6273]	8	125µm	4.3mm MAX	8	8	504014-6
OBSOLETE	68.86[2.7111]	7	125µm	3.1mm MAX	7	7	504014-5
OBSOLETE	53.04[2.0881]	9	125µm	5.3mm MAX	9	9	504014-4
OBSOLETE	53.04[2.0881]	9	125µm	5.3mm MAX	9	9	504014-3
OBSOLETE	66.72[2.6273]	8	125µm	4.3mm MAX	8	8	504014-2
OBSOLETE	68.86[2.7111]	7	125µm	3.1mm MAX	7	7	504014-1

A MAX	BOOT	HOLE SIZE	CABLE SIZE	FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE	9-3-92	AMP AMP Incorporated Harrisburg, PA 17105-3608
DRAWN BY		DATE	9-28-92	
CHECKED BY		DATE	9-29-92	
DESIGNED BY		DATE	9-29-92	
PRODUCT SPEC		DATE		
APPLICATION SPEC		DATE		
REVISION		DATE		
CUSTOMER DRAWING		SCALE	NTS	SHEET 1 OF 2

906 CONNECTOR KIT

STANDARD CASE CODE DRAWING NO. **A200779C-504014**

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
		REV	DESCRIPTION	DATE	BY
CE	16	F	LTR		
		K	SEE SHT 1	-	-

OBSOLETE	68.86 [2.711]	△	336µm	3.1mm MAX	△	△	4-504014-6
OBSOLETE	68.86 [2.711]	△	200µm	3.1mm MAX	△	△	4-504014-5
OBSOLETE	68.86 [2.711]	△	200µm	3.1mm MAX	△	△	4-504014-4
OBSOLETE	68.86 [2.711]	△	.039 in	3.1mm MAX	△	△	4-504014-2
OBSOLETE	66.72 [2.627]	△	231µm	4.3mm MAX	△	△	4-504014-1
OBSOLETE	68.86 [2.711]	△	125µm	3.1mm MAX	△	△	4-504014-0
OBSOLETE	68.86 [2.711]	△	240µm	3.1mm MAX	△	△	3-504014-7
OBSOLETE	68.86 [2.711]	△	470µm	3.1mm MAX	△	△	3-504014-6
OBSOLETE	68.86 [2.711]	△	250µm	3.1mm MAX	△	△	3-504014-5
OBSOLETE	68.86 [2.711]	△	280µm	3.1mm MAX	△	△	3-504014-3
OBSOLETE	68.86 [2.711]	△	500µm	3.1mm MAX	△	△	3-504014-2
OBSOLETE	68.86 [2.711]	△	140µm	3.1mm MAX	△	△	3-504014-1
OBSOLETE	68.86 [2.711]	△	250µm	3.1mm MAX	△	△	3-504014-0
OBSOLETE	68.86 [2.711]	△	125µm	3.1mm MAX	△	△	2-504014-8
OBSOLETE	68.86 [2.711]	△	145µm	3.1mm MAX	△	△	2-504014-7
OBSOLETE	68.86 [2.711]	△	231µm	3.1mm MAX	△	△	2-504014-6
	A MAX	BOOT	HOLE SIZE	CABLE SIZE	FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR: R. HILLEMAN 9-3-92	AMP AMP Incorporated Harrisburg, PA 17105-3608
DIMENSIONS: mm (INCHES)		CHK: P. YEAGER 9-20-92	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP: S. BLANCHET 9-20-92	NAME: 906 CONNECTOR KIT
 Ø PLC ±.0005 Ø PLC ±.0005 Ø PLC ±.0005 Ø PLC ±.0005 Holes: ±.0005		APPLICATION SPEC: -	SIZE: CASE CODE DRAWING NO. RESTRICTED TO
MATERIAL: SEE TABLE	FINISH: SEE TABLE	REPRINT: -	A2 00779 C-504014
CUSTOMER DRAWING		SCALE: NTS	SHEET: 2 OF 2 REV: K