


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	K	REV PER 0A00-0065-03	6-5-03	DE SB

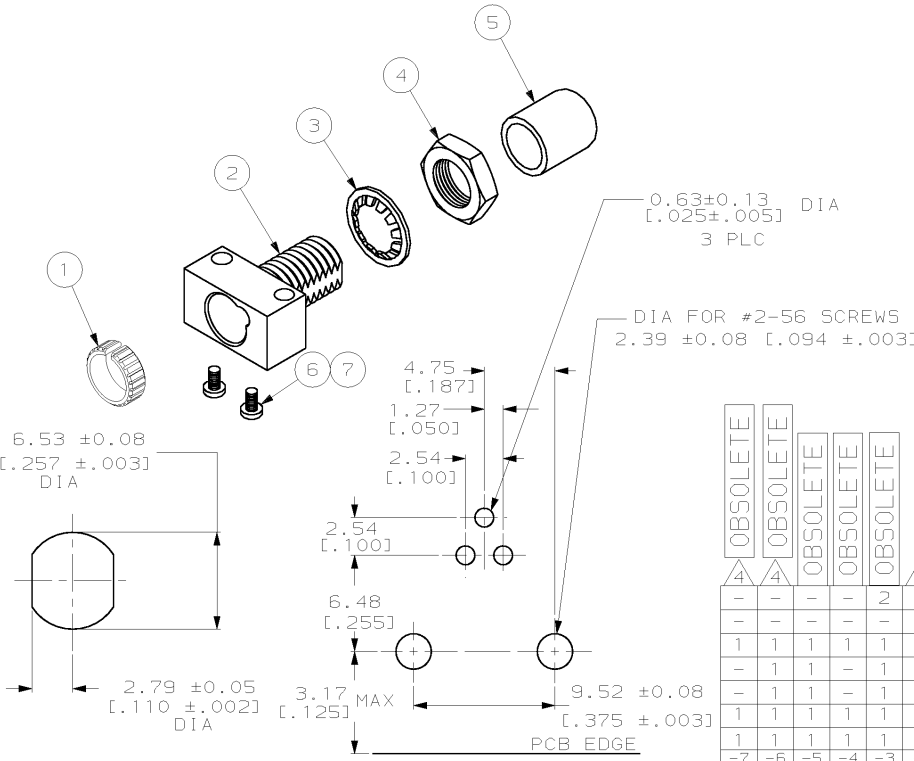

1. MAX RECOMMENDED PANEL THICKNESS: 1.57 [.062]
 2. DIMENSIONS IN [] ARE IN INCHES
 3. ACCEPTS ACTIVE DEVICES: TO-18 TYPE, TO-46 TYPE, TO-52 TYPE, AND HONEYWELL LOW-COST PLASTIC SWEETSPOT
- △ BULK PACKAGED

QTY	REQ'D	PER	ASSY	PART NO	DESCRIPTION	ITEM NO.
-	-	-	-	2-22798-5	2-56x.50" SCREW	7
-	-	-	-	2-22798-2	2-56x.25" SCREW	6
1	1	1	1	1-26538-9	PROTECTIVE CAP	5
-	1	1	-	981155-4	JAM NUT	4
-	1	1	-	1-22145-3	LOCK WASHER	3
1	1	1	1	502137-2	ACTIVE DEVICE MOUNT	2
1	1	1	1	501084-1	ALIGNMENT RING	1

SUGGESTED CLEARANCE HOLE

SUGGESTED MOUNTING PATTERN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.KNOWLDEN 7-13-88	AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK B.BRIGGS 7-14-88	NAME ACTIVE DEVICE MOUNT KIT, PCB MOUNT, FSMA, OPTIMATE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K. MONROE 7-14-88	SIZE A3	
9 PLC ±.010		PRODUCT SPEC	CAGE CODE 00779	
1 PLC ±.015		APPLICATION SPEC	DRAWING NO C-502136	
2 PLC ±.025(.010)		WEIGHT	RESTRICTED TO	
3 PLC ±.030		CUSTOMER DRAWING	SCALE 4:1	
4 PLC ±.040			SHEET 1 OF 1	
ANGLES ±.010			REV K	
MATERIAL DEVICE MOUNT: ZINC				