NOTES,

1. MATERIAL AND FINISH

PLUG HOUSING

,THERMOPLASTIC (UL94V-0) COLOR:BLACK

REC. CONTACT

,PHOS-BRONZE FINISH:OVER NICKEL

MATING END:0.0002 MIN.OR 0.00076 MIN. GOLD.

TERMINATION END:TIN-LEAD OVER SEALING TREATMENT.

2 P.C.B LAYOUT AND P.C.B TREATMENT (REF.)

USE A P.C.B SURFACE ARE TREATED WITH SOLDER RESIST.

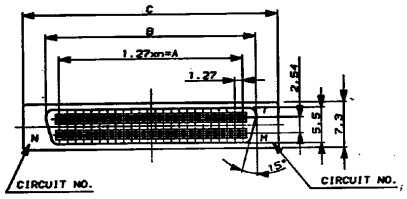









3 KINK POSITIONS (4 POSITIONS)

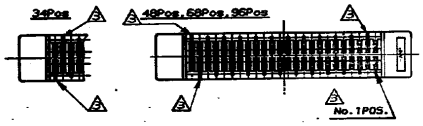

Au PL. 0.00076 MIN.	96	49	59.69	63.86	71.00	47	96	6-174681-8
	68	35	41.91	46.08	53.22	33	68	6-174681-7
	48	25	29.21	33.38	40.52	23	48	6-174681-6
	34	18	20.32	24.49	31.63	16	34	6-174681-5
Au PL. 0.0002 MIN.	96	49	59.69	63.86	71.00	47	96	174681-8
	68	35	41.91	46.08	53.22	33	68	174681-7
	48	25	29.21	33.38	40.52	23	48	174681-6
	34	18	20.32	24.49	31.63	16	34	174681-5
REMARK	CIRCUIT NO.		DIMENSION A	B	C	n	POS.	PART NO.

LTR	REVISION RECORD	DR	CHK	DATE
B	REVISED ECN:J-13147	K.S.	R.N.	7.10.98
A	ADD Au 0.76μm ECN:J-12368	K.S.	R.N.	4.9.98
0	ECN:J-10187	Yo.S.	R.N.	2.11.98

WIRE RANGE: ㎟ OUD - ㎜ INSULATION DIA: - ㎜

MATERIAL: ⚠ DR. Yo.SATO 12/23/97 FINISH: ⚠ DE. 12/23/97

CHK. R.NISHIHARA 1-23-98 APP.

NAME: ④ PLUG ASS,Y VERTICAL (W/KINK) FOR AMPLIMITE 050 SERIES:B-TO-B CONN.

GENERAL TOLERANCE: 0<dim<10 : ±0.2; 10<dim<30 : ±0.25; 30<dim<100 : ±0.3; ANGLES : ±3°

SIZE: A3 LOC: J NUMBER: C-174681

SCALE: 2-1 REV.: B SHEET: 1OF1

AMP (JAPAN), LTD. Tokyo, Japan

CUSTOMER DRAWING

NUMBER C-174681

3rd ANGLE PROJECTION

METRIC

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

PRINT DIST

Downloaded from Elcodis.com electronic components distributor