THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-. .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			Y	REVISED PER EC 0513-0238-03	24SEP03	JG	CC

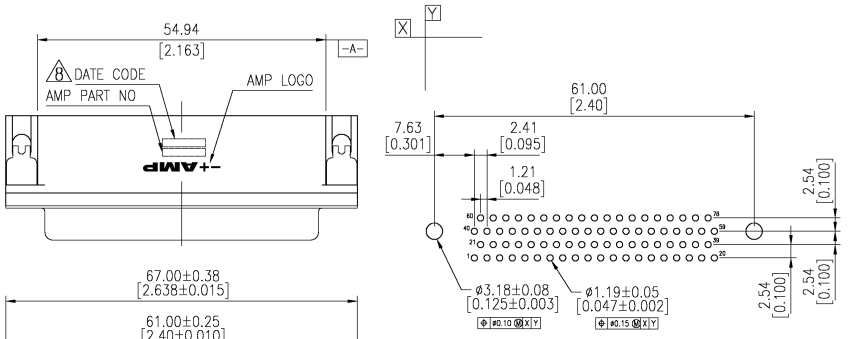

RECOMMENDED PCB LAYOUT

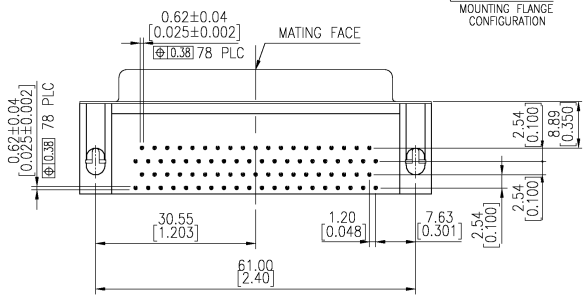



MATERIAL:

1. Housing: PBT , 30 % G.F polyester, Black.
   (UL 94V-0 Rated)
2. Contact: Phos. Bronze.
3. Contact Plated: Gold Plated over 50u"
   Nickel underplated.
4. Solder Tail: Sn/Pb Plated 120u" over 50u"
   Nickel underplated.
5. Shell: Steel, Nickel Plated.
6. Boardlock: Brass, Tin or Sn/Pb Plated 100u"
7. Female Screwlock: Brass, Nickel plated 30u" Min.

8 Four digit date code in this format.



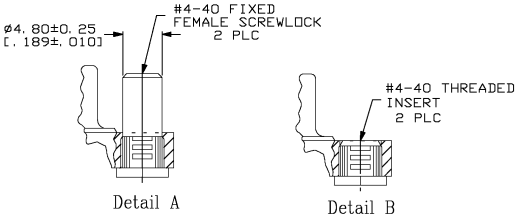

Packaging	Mounting Flange Config	Contact Finish	AMP Part NO.
Tray	Detail A	Gold flash	2-748483-3
Tray	Detail A	15 µ"	2-748483-2
Tray	Detail B	Gold flash	2-748483-1
Tray	Detail B	15 µ"	2-748483-0
Tray	Detail A	30 µ"	748483-6
Tray	Detail B	30 µ"	748483-5

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± 0.30
2 PLC ± 0.20
3 PLC ± 0.10
4 PLC ± –
ANGLES ± – °

MATERIAL –
FINISH –

DWN J.BURWELL 22APR02
CHK C.CASH 22APR02
APVD –
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

Tyco Electronics Corporation

NAME
AMPLIMITE HD-22
78 POS RECEPTACLE, RIGHT ANGLE
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-748483	–

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV Y

AMP 1471-9 REV 31MAR2000

748483

Downloaded from Elcodis.com electronic components distributor