

## HC-B 6-TFL/PG13,5S

Order No.: 1771118

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1771118>

Sleeve housing, for single locking latch, height 43 mm, with screw connection, 1x Pg13.5, lateral cable entry

Commercial data	
EAN	4017918035853
Pack	10 pcs.
Customs tariff	85389099
Weight/Piece	0.11852 KG
Catalog page information	Page 480 (PC-2009)

**Product notes**

WEEE/RoHS-compliant since:  
01/31/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data**

General data	
Note	For contact inserts HC-B6, BB10, DD24, M
Design	B6
Height	44 mm
Width	43 mm
Length	60 mm

Housing type	Sleeve housings
Locking type	for single locking latch
Type of the screw connection	1x Pg13,5
Pg screw connection	With
Wrench size, union nut	20 mm
Cable exit	Lateral
External cable diameter	7.5 mm ... 12.5 mm
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Cable gland material	Nickel-plated brass
Cable seal material	NBR

#### Certificates / Approvals




Certification

GOST

#### Diagrams/Drawings

Dimensioned drawing

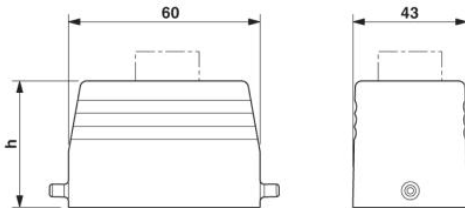

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;