

HC-B 24-AML

Order No.: 1771930

The figure shows the product version HC-B 16-AML

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1771930>HEAVYCON panel mounting base B24, with single locking latch,
height 27 mm

| Commercial data | |
|--------------------------|--------------------|
| EAN | 4017918036614 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |
| Weight/Piece | 0.13442 KG |
| Catalog page information | Page 497 (PC-2009) |

Product notesWEEE/RoHS-compliant since:
03/01/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

| General data | |
|--------------|---|
| Note | For contact inserts HC-B24, BB46, D64, DD108, M |
| Design | B24 |
| Height | 27 mm |
| Width | 43 mm |
| Length | 140 mm |

| | |
|---------------------------------|---------------------------------|
| Housing type | Panel mounting base, straight |
| Locking type | With single locking latch |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | Powder-coated, gray |
| Seal material | NBR |
| Locking latch material | High-grade steel, handle: PA-GF |
| Material grip body interlock | PA-GF |
| Length of the assembly cutout | 113 mm |
| Width of the assembly cutout | 35 mm |

Certificates / Approvals




Certification


GOST

Diagrams/Drawings

Dimensioned drawing

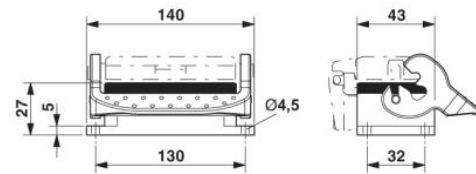

Dimensional drawing

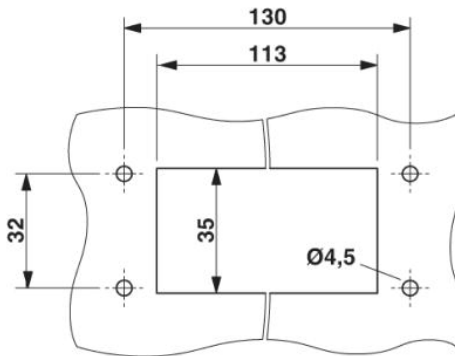

Panel cutout

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;