

HC-B 24-TMQ/PG29G

Order No.: 1771859

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1771859>

Sleeve housing, with double locking latch, height 76 mm, with screw connection, 1x Pg29, straight cable entry

Commercial data

| | |
|--------------------------|--------------------|
| EAN | 4017918036553 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |
| Weight/Piece | 0.44246 KG |
| Catalog page information | Page 500 (PC-2009) |

Product notes

WEEE/RoHS-compliant since:
03/01/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

| | |
|--------|---|
| Note | For contact inserts HC-B24, BB46, D64, DD108, M |
| Design | B24 |
| Height | 76 mm |
| Width | 43 mm |
| Length | 120 mm |

| | |
|---------------------------------|---------------------------------|
| Housing type | Sleeve housings |
| Locking type | With double locking latch |
| Type of the screw connection | 1x Pg29 |
| Pg screw connection | With |
| Wrench size, union nut | 37 mm |
| Cable exit | Straight |
| External cable diameter | 18 mm ... 27 mm |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | Powder-coated, gray |
| Cable gland material | Nickel-plated brass |
| Cable seal material | NBR |
| Locking latch material | High-grade steel, handle: PA-GF |
| Material grip body interlock | PA-GF |

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

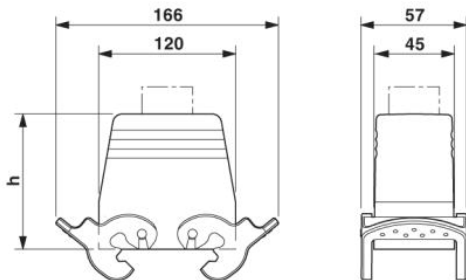

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;