

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

NOV. 2001.



COPYRIGHT 2001 By -

ALL RIGHTS RESERVED.




LOC DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
J2		REVISED PER ECO-11-005033	24MAR11	RK	HMR

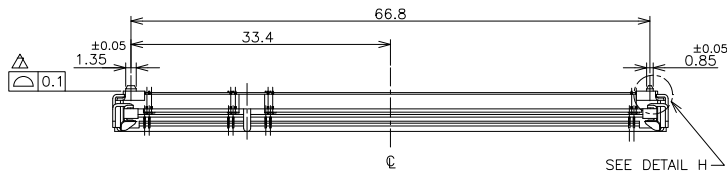

DETAIL L (SCALE 5:1)

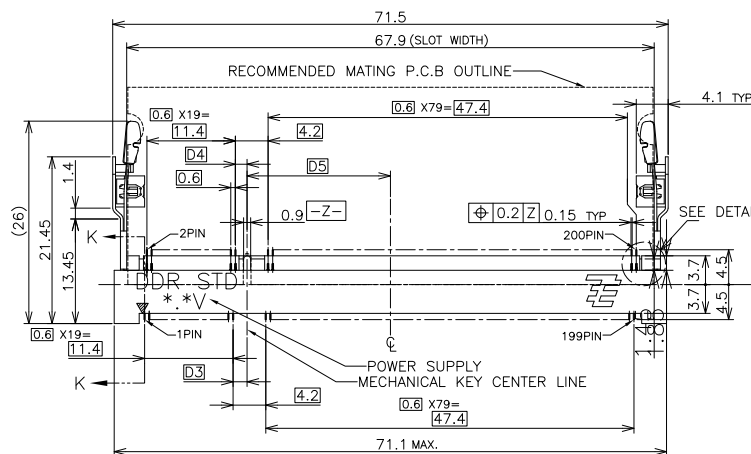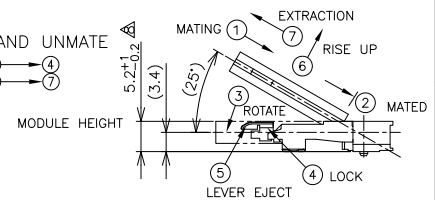

(APPLIED TO SHEET 1-2)

1. MATERIAL ; HOUSING: HIGH TEMPERATURE THERMO PLASTIC UL94V-0
CONTACT: COPPER ARROY
LOCK LEVER: STAINLESS STEEL
SOLDER PEG: COPPER ARROY

△ FINISH ; CONTACT AREA: GOLD FLASH ON 0.0013MIN ALL OVER NICKEL.
SOLDERING AREA: GOLD FLASH PLT.
SOLDER PEG: TIN PLATING.

△ MECHANICAL KEY POSITION OF CONNECTOR SEE TABLE.

△ TOLERANCES NON-CUMULATIVE.

△ NOT TO SCALE.

△ INSIDE MUST BE RESIST COAT EXCEPT SOLDER PATTERN.




△ COPLANARITY : 0.1 MAX.

△ THE FLOATING VALUE BY SOLDERING IS NOT INCLUDED.

△ NOT MATING CONDITION.

△ FINISH ; CONTACT AREA: 0.00076 GOLD ON 0.0013MIN ALL OVER NICKEL.
SOLDERING AREA: 0.00076 GOLD PLT.
SOLDER PEG: TIN PLATING.

11 IF THE MODULE DOESN'T INSERT AND LOCK IN THE LATCH SMOOTHLY,
OPEN WIDE BOTH LATCHES BY MANUAL. AND THE MODULE MUST BE
INSERTED AND LOCKED IN THE LATCH.



GENERAL TOLERANCE
10_± ±0.2
30_± >10: ±0.25
100_± >30: ±0.3
ANGLES: ±3°

TYPE 1	△	AVAILABLE	—H—	2.5V (DDR1)	18.45	1.5	1.8	200	1473005-5
TYPE 2	△	AVAILABLE	BOSSLESS	1.8V (DDR2)	17.55	2.4	2.7	200	1-1473005-4
TYPE 2	△	AVAILABLE	—H—	1.8V (DDR2)	17.55	2.4	2.7	200	1473005-4
TYPE 1	△	AVAILABLE	HOUSING COLOR: GRAY	2.5V (DDR1)	18.45	1.5	1.8	200	6-1473005-1
TYPE 1	△	AVAILABLE	BOSSLESS	2.5V (DDR1)	18.45	1.5	1.8	200	1-1473005-1
TYPE 1	△	AVAILABLE	—H—	2.5V (DDR1)	18.45	1.5	1.8	200	1473005-1
TAB TYPE	FINISH	TOOLING STATUS	REMARK	POWER SUPPLY (TYPE)	D5	D4	D3	POS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN B.WONG

CHK C.WANG

APVD S.YAO

108-5701

APPLICATION SPEC

WEIGHT 4.7g

CUSTOMER DRAWING

15JUL10

15JUL10

15JUL10

15JUL10

15JUL10

15JUL10

15JUL10

15JUL10



STE TE Connectivity

DDR1 & DDR2 SODIMM SOCKET
0.6mm PITCH 200POS
STANDARD PROFILE STANDARD TYPE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C=1473005	—

SCALE 2:1 SHEET 1 of 4 REV J2

1.8V	17.55	2.4	2.7
2.5V	18.45	1.5	1.8
POWER SUPPLY	D5	D4	D3

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		 TE Connectivity	
DIMENSIONS:		CHK			
MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±		APVD	
		1 PLC ±		PRODUCT SPEC	
		2 PLC ±		APPLICATION SPEC	
		3 PLC ±			
4 PLC ±		ANGLES ±		DDR1 & DDR2 SODIMM SOCKET 0.6mm PITCH 200POS STANDARD PROFILE STANDARD TYPE	
MATERIAL		FINISH		SIZE CAGE CODE DRAWING NO A3 00779 C=1473005	
		WEIGHT		RESTRICTED TO	
		CUSTOMER DRAWING		SCALE 2:1 SHEET 2 of 4 REV J	

