

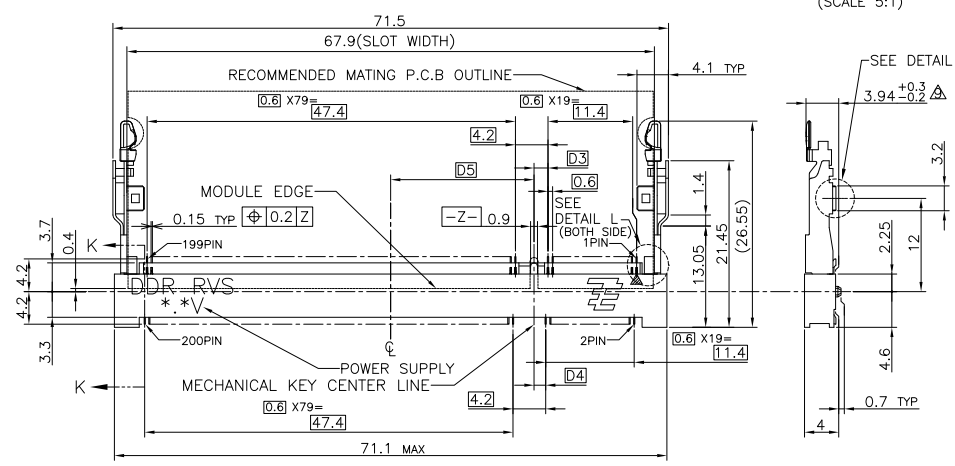
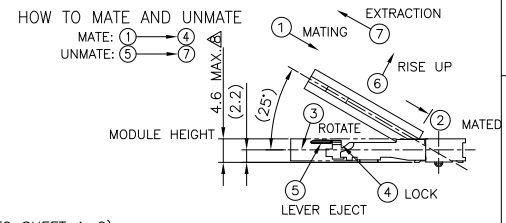


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION SEP. 2003. ALL RIGHTS RESERVED. COPYRIGHT 2003 BY -

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
E2		REVISED PER ECO-11-005033	28MAR11	RK	HMR

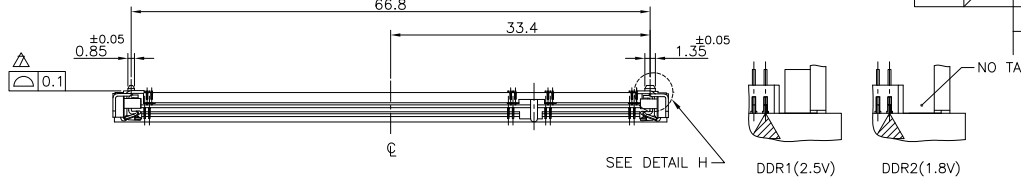

(APPLIED TO SHEET 1-2)
 1. MATERIAL ; HOUSING: HIGH TEMPERATURE THERMO PLASTIC UL94V-0
 CONTACT: COPPER ARROY
 LOCK LEVER: STAINLESS STEEL
 SOLDER PEG: COPPER ARROY
 2. FINISH ; CONTACT AREA: GOLD FLASH ON 0.0013MIN ALL OVER NICKEL.
 SOLDERING AREA: GOLD FLASH PLT.
 SOLDER PEG: TIN PLATING.
 ⚠ MECHANICAL KEY POSITION OF CONNECTOR SEE TABLE.
 ⚠ TOLERANCES NON-CUMULATIVE.
 ⚠ NOT TO SCALE.
 ⚠ INSIDE MUST BE RESIST COAT EXCEPT SOLDER PATTERN.
 ⚠ COPLANARITY : 0.1 MAX.
 ⚠ THE FLOATING VALUE BY SOLDERING IS NOT INCLUDED.
 ⚠ NOT MATING CONDITION.
 ⚠ IF THE MODULE DOESN'T INSERT AND LOCK IN THE LATCH SMOOTHLY,
 OPEN WIDE BOTH LATCHES BY MANUAL. AND THE MODULE MUST BE
 INSERTED AND LOCKED IN THE LATCH.

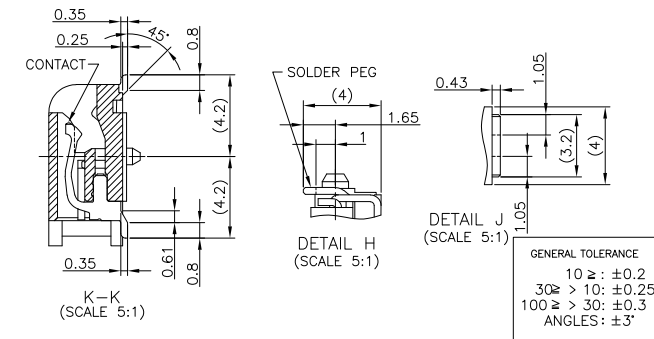

AVAILABLE	—H—	1.8V (DDR2)	17.55	2.4	2.7	200	1-1717833-4
AVAILABLE	—H—	1.8V (DDR2)	17.55	2.4	2.7	200	1717833-4
AVAILABLE	—H—	2.5V (DDR1)	18.45	1.5	1.8	200	1717833-1
TOOLING STATUS	REMARK	POWE SUPPLY (TYPE)	D5	D4	D3	POS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	B.WONG	20JUL10
DIMENSIONS:		CHK	C.WANG	20JUL10
MM		APVD	S.YAO	20JUL10
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
0 PLC	±	DDR1 & DDR2 SODIMM SOCKET 0.6mm PITCH		
1 PLC	±	200POS LOW PROFILE REVERSE TYPE		
2 PLC	±	(LATCH DIRECT SOLDERING TYPE)		
3 PLC	±	PRODUCT SPEC		
4 PLC	±	APPLICATION SPEC		
ANGLES	±	108-5701		
MATERIAL	FINISH	WEIGHT	3.2g	
		SIZE	A3	00779
		CAGE CODE	C-1717833	
		DRAWING NO	1717833	
		RESTRICTED TO		
GENERAL TOLERANCE		CUSTOMER DRAWING	SCALE	2:1
10 ≥ : ±0.2		SHEET	1	OF 4
30 ≥ > 10: ±0.25		REV	E2	
100 ≥ > 30: ±0.3				
ANGLES: ±3°				

4

3


2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION SEP ,2003. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
-	-	SEE SHEET 1	-	-	-	

REFERENCE P.C.BOARD PATTERN LAYOUT (CONNECTOR MOUNTING SIDE)



REAL SIZE (SCALE 1:1)

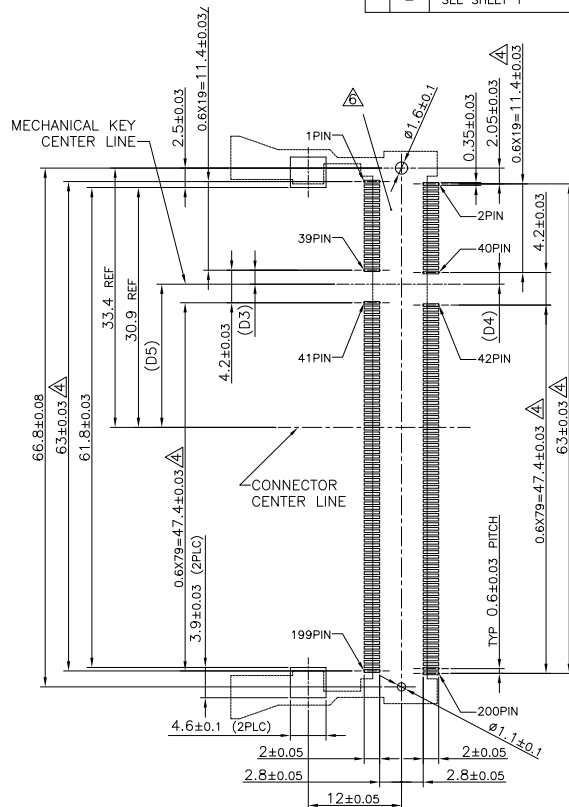

1.8V	17.55	2.4	2.7
2.5V	18.45	1.5	1.8
POWER SUPPLY	D5	D4	D3

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	STE TE Connectivity	
DIMENSIONS: MM		CHK		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME	
0 PLC	±	PRODUCT SPEC	DDR1 & DDR2 SODIMM SOCKET 0.6mm PITCH	
1 PLC	±	APPLICATION SPEC	200POS LOW PROFILE REVERSE TYPE	
2 PLC	±	WEIGHT	(LATCH DIRECT SOLDERING TYPE)	
3 PLC	±	CUSTOMER DRAWING	SIZE	RESTRICTED TO
4 PLC	±		A3	
ANGLES	±		CAGE CODE	DRAWING NO
FINISH			00779	1717833
			SCALE	SHEET
			2:1	2 of 4
				REV
				E2

4




3

2





1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION SEP. 2003.
 ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
-	-	SEE SHEET 1	-	-	-	

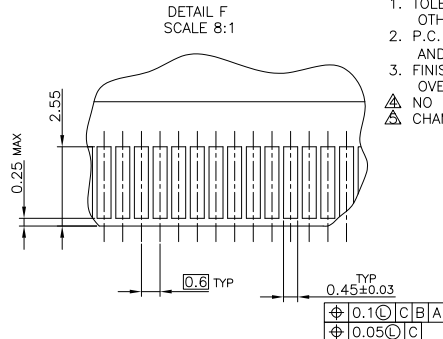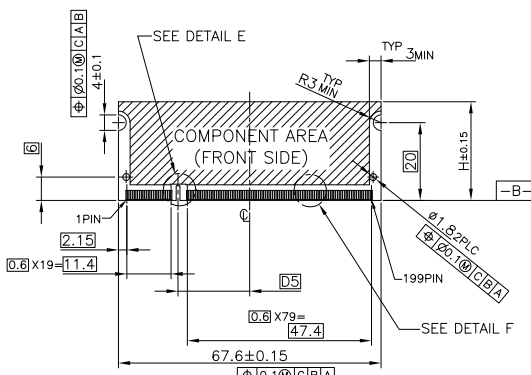

- (APPLIED TO SHEET 3)
- TOLERANCES ON ALL DIMENSIONS ±0.15 UNLESS OTHERWISE SPECIFIED.
 - P.C. BOARD THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION.
 - FINISH OF PAD : GOLD PLATING 0.00076 MIN. OVER Ni PLATING 0.002MIN.
- ▲ NO BURR
 ▲ CHAMFER 0.25 MAX x 45° IF EXIST.

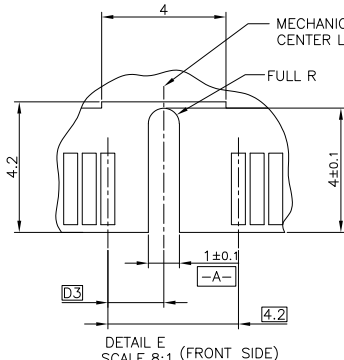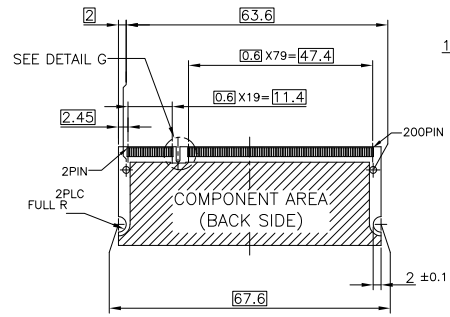

推奨基板仕様
 RECOMMENDED MATING P.C.B CONFIGURATION





31.75	1.8V	17.55	2.4	2.7
25.4	2.5V	18.45	1.5	1.8
H	POWER SUPPLY	D5	D4	D3

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	DWN	CHK	APVD	PRODUCT SPEC	APPLICATION SPEC	WEIGHT	CUSTOMER DRAWING
MATERIAL	FINISH	NAME	TE Connectivity					RESTRICTED TO
		DDR1 & DDR2 SODIMM SOCKET 0.6mm PITCH 200POS LOW PROFILE REVERSE TYPE (LATCH DIRECT SOLDERING TYPE)						
		SIZE	CAGE CODE	DRAWING NO				
		A3	00779	C-1717833				
		SCALE	SHEET	REV				
		2:1	3 of 4	E2				

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION SEP. 2003. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
-	-	SEE SHEET 1	-	-	-	

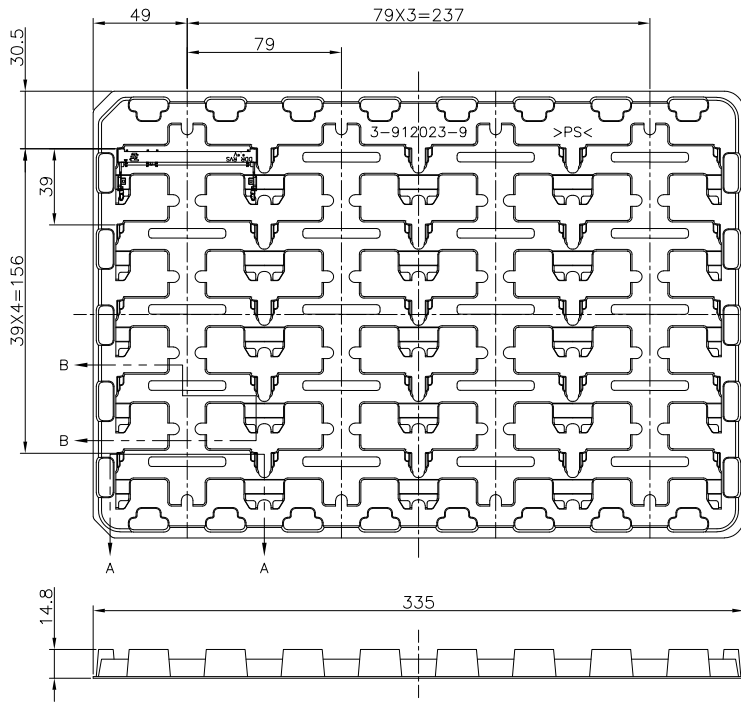

1. THE DIRECTION OF EACH CONNECTOR ON A TRAY IS REFERRED TO THIS DRAWING.
2. GENERAL TOLERANCE : ± 0.5

20EA/TRAY	1-1717833-4
20EA/TRAY	1717833-4
20EA/TRAY	1717833-1
QTY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity	
DIMENSIONS: MM		CHK		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC \pm 1 PLC \pm 2 PLC \pm 3 PLC \pm 4 PLC \pm ANGLES \pm		APVD	NAME	
MATERIAL		PRODUCT SPEC	DDR1 & DDR2 SODIMM SOCKET 0.6mm PITCH	
FINISH		APPLICATION SPEC	200POS LOW PROFILE REVERSE TYPE	
		WEIGHT	(LATCH DIRECT SOLDERING TYPE)	
		CUSTOMER DRAWING	SIZE A3	RESTRICTED TO
			CAGE CODE 00779	DRAWING NO. C-1717833
			SCALE 1:2	SHEET 4 OF 4
				REV E2