



REV.	ECN NO.	MODIFY CONTENT	DATE
1	S0905048	Initial release	5/20/09
2	S0907005	Change The Switch Pin	7/01/09

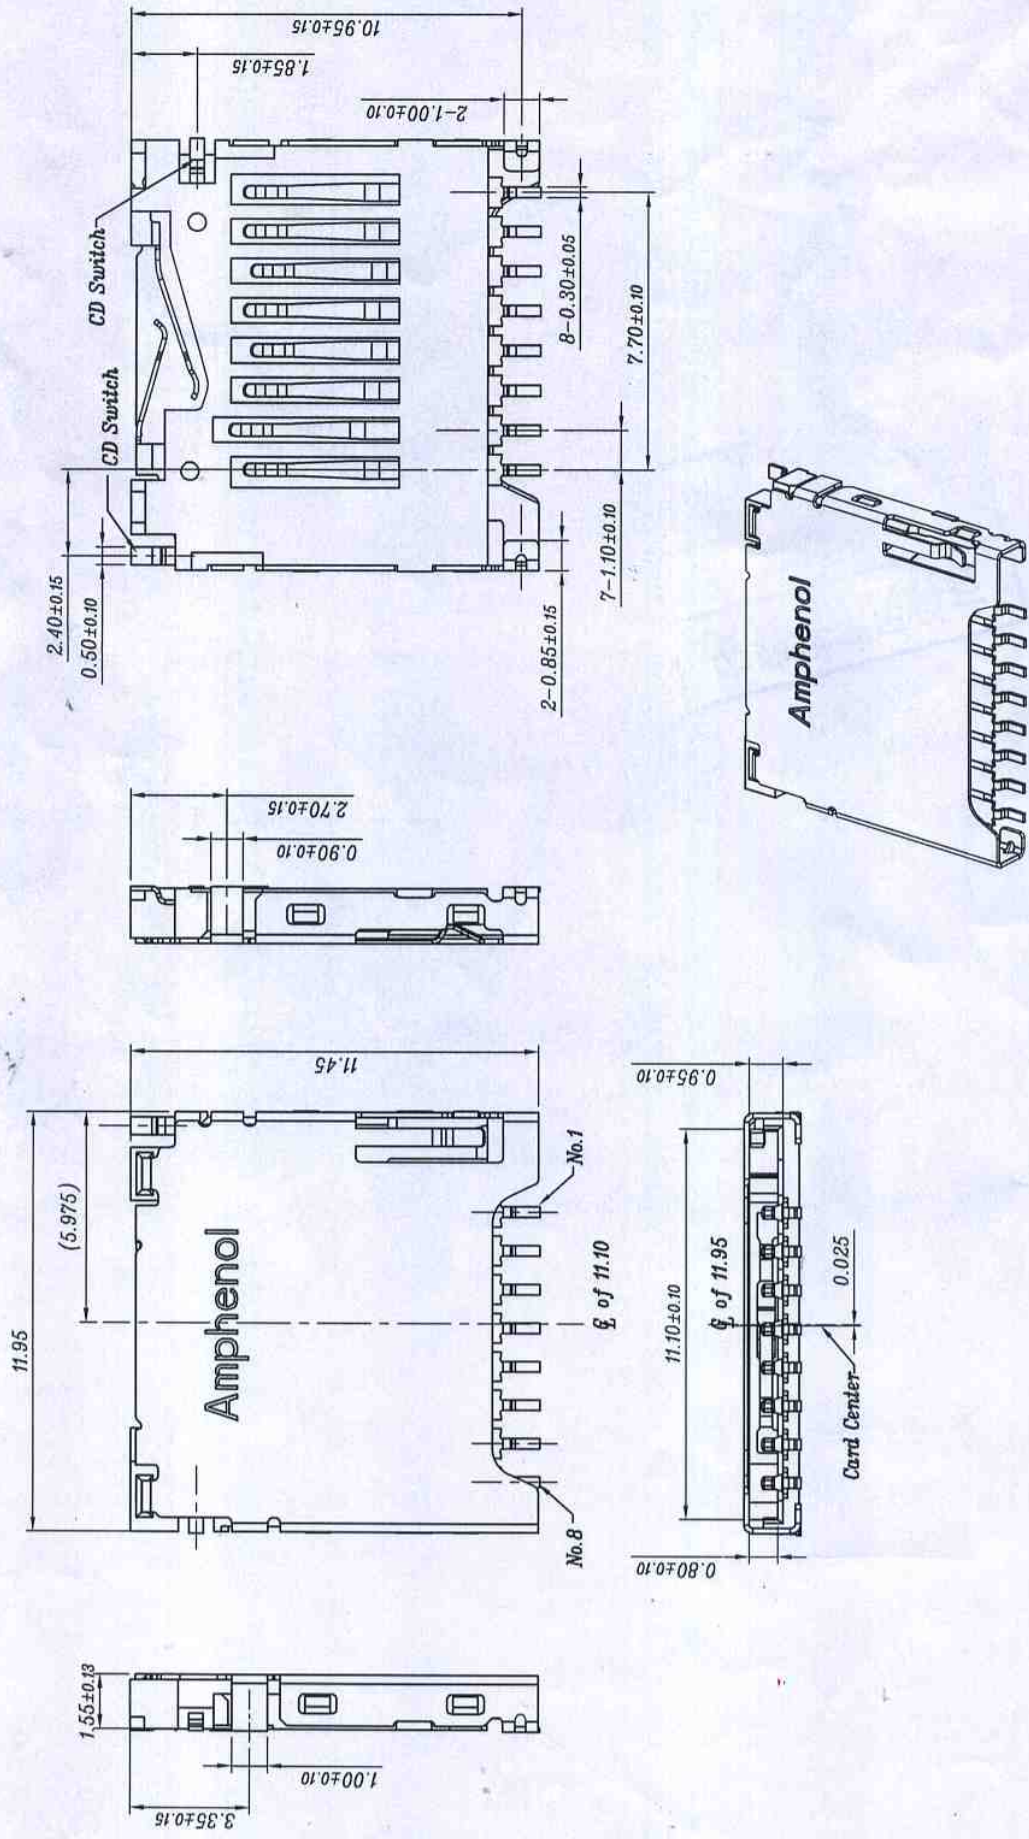


GENERAL	TOLERANCE	FILE NO.	PART NO.	DRAWN	MATERIAL	SCALE
X ± 0.50	.x ± 5*	114-00841	114-00841-68	CHECKED	Ray lee	5:1
.X ± 0.38	.x ± 2*	2	Micro SD None Push Connector Top Mount	APPROVED	Jane	MM
.XX ± 0.25	.xx ± 1*		1/2		Henry Wang	
Amphenol Shouhmin Industry						

REV.	ECN NO.	MODIFY CONTENT	DATE
1	S0806048	Initial release	5/20/09
2	S0807005	Change The Switch Pins	7/01/09

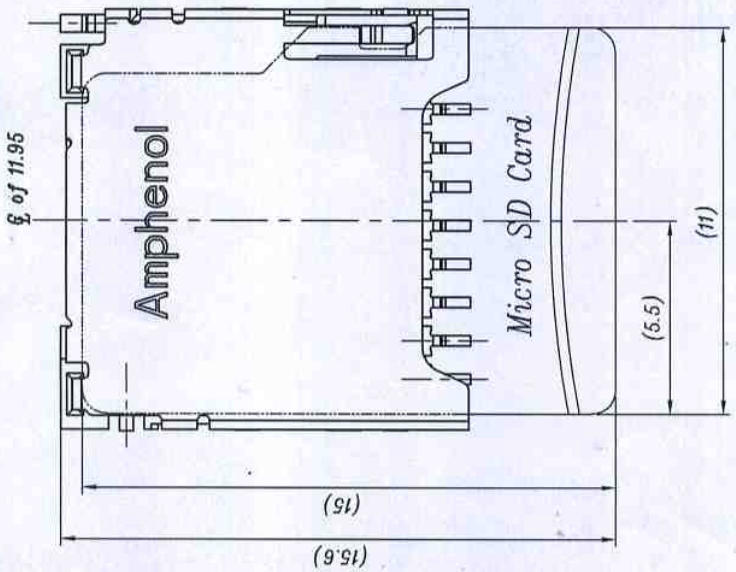

PIN Assignments

PIN NO.	Micro SD
1	Date Line [Bit 2]
2	Card Detect / Date Line [Bit 3]
3	Command / Response
4	Supply voltage
5	Clock
6	Supply voltage ground
7	Date Line [Bit 0]
8	Date Line [Bit 1]

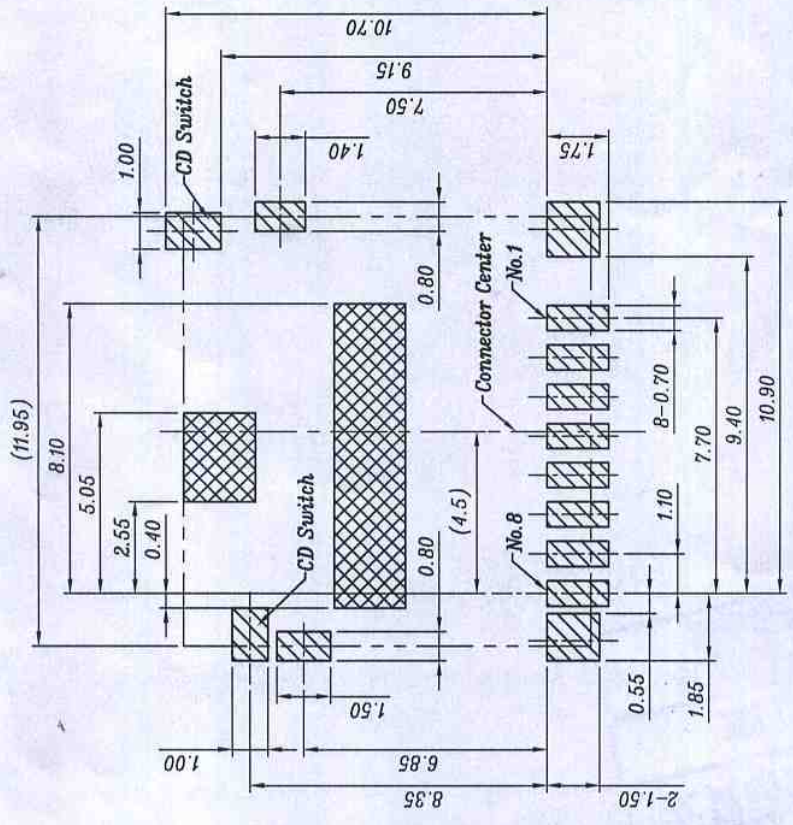

RECOMMENDED P.C.B LAYOUT

P.C.B TOLERANCE: ±0.05

- Connector Area
- PAD Area
- Pattern Prohibited Area

- Note:**
- Material:**
Housing: LCP Black UL 94V-0
Contact: Copper alloy
Shell: Stainless steel
 - Plating:**
Contact Area: Plating Au
Solder tail: Plating Tin
Shell: Plating weldable Ni
 - Tail Coplanarity 0.12mm Max.**
 - The Part must compliant AMSI'S ROHS SPEC.**

GENERAL TOLERANCE	FILE NO.	114-00841	PART NO.	114-00841-68	DRAWN	Ray lee	MATERIAL	SCALE	5:1
X ± 0.50	REV.	2	TITLE	Micro SD None Push Connector Top Mount	CHECKED	Janie	DATE	UNIT	MM
.X ± 0.38	SIZE	A4	SHEET	2/2	APPROVED	Henry Wang	Amphenol Shouhmin Industry		
.XX ± 0.25									