


THE PART NUMBER:
101-00178-***

Pin Type	Interface Dim L	Pin No.
detect	3.50MM	25, 26
General	4.25MM	all other pins
power	5.00MM	1, 13, 38, 50

- 29:功能區鍍金1u", 錫鍍鍍亮錫鉛至少160u"
- 30:功能區鍍金3u", 錫鍍鍍亮錫鉛至少160u"
- 31:功能區鍍金5u", 錫鍍鍍亮錫鉛至少160u"
- 32:功能區鍍金10u", 錫鍍鍍亮錫鉛至少160u"
- 33:功能區鍍金15u", 錫鍍鍍亮錫鉛至少160u"
- 34:功能區鍍金30u", 錫鍍鍍亮錫鉛至少160u"
- 64:功能區鍍金1u", 錫鍍鍍亮錫鉛至少160u"
- 65:功能區鍍金3u", 錫鍍鍍亮錫鉛至少160u"
- 66:功能區鍍金5u", 錫鍍鍍亮錫鉛至少160u"
- 67:功能區鍍金10u", 錫鍍鍍亮錫鉛至少160u"
- 68:功能區鍍金15u", 錫鍍鍍亮錫鉛至少160u"
- 69:功能區鍍金30u", 錫鍍鍍亮錫鉛至少160u"

- Notes:
1. All Dimensions are in Millimeters.
 2. Operation voltage: 100 VAC max.
 3. Current rating : 1 Amps max.
 4. Contact resistance: 40m ohms max.
 5. Insulation resistance: 1000M ohms min 500 VDC
 6. Dielectric withstanding voltage: 500 VAC / 1minute
 7. Operating Temperature: -20°C to +60°C
 8. Storage Temperature: -40°C to +70°C.
 9. Material see table.
 10. Total Mating Force : 28.8N (MAX) at 25 mm/minute
 11. Total Unmating Force: 4.9N (MAX) at 25 mm/minute
 12. Single Pin Retention Force: 9.8N(MIN) at 25 mm/minute

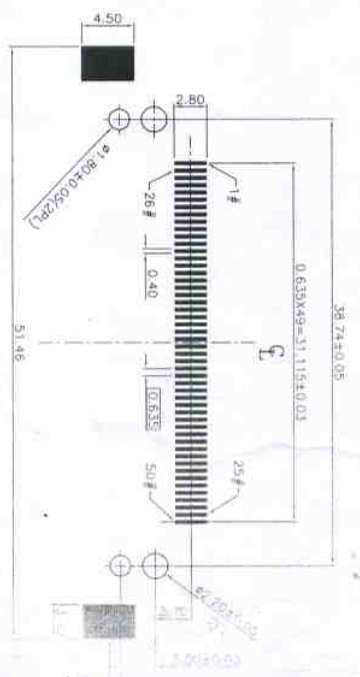

GENERAL TOLERANCE	FILE NO.	PART NO.	DRAWN	LDP	MATERIAL	SCALE	NO SCALE
X ± 0.50	X ± 5°	101-00178	101-00178-***	hnt/vy/ly	DATE	UNIT	
X ± 0.38	X ± 2°	REV. A	CF Conn. - 32(13.75 插形·板 L·Post38.74行接地片·本色)	APPROVED	04/13/2006		
.XX ± 0.25	.XX ± 1°	SIZE A4	1 OF 1	NS/ly			

SM Shouh Min Industry (ShenZhen) CO., LTD

REV.	ECN NO.	MODIFY CONTENT	DATE
A	ES.0060.036	插形	04/13/2006