

REV.	ECN NO.	MODIFY CONTENT	DATE
A	ES00605.035	打板發行	05/17/2006

PIN#	PIN NAME	I/O	PIN FUNCTION
1	GND		GROUND
2	D03	I/O	I1Z,0Z3
3	D04	I/O	I1Z,0Z3
4	D05	I/O	I1Z,0Z3
5	D06	I/O	I1Z,0Z3
6	D07	I/O	I1Z,0Z3
7	-CE1	I	I3U
8	A10	I	I1Z
9	-OE	I	I3U
10	A09	I	I1Z
11	A08	I	I1Z
12	A07	I	I1Z
13	VCC		POWER
14	A06	I	I1Z
15	A05	I	I1Z
16	A04	I	I1Z
17	A03	I	I1Z
18	A02	I	I1Z
19	A01	I	I1Z
20	A00	I	I1Z
21	D00	I/O	I1Z,0Z3
22	D01	I/O	I1Z,0Z3
23	D02	I/O	I1Z,0Z3
24	WP	O	OT3
25	-CD2	O	GROUND

PIN#	PIN NAME	I/O	PIN FUNCTION
26	-CD1	O	GROUND
27	D11'	I/O	I1Z,0Z3
28	D12'	I/O	I1Z,0Z3
29	D13'	I/O	I1Z,0Z3
30	D14'	I/O	I1Z,0Z3
31	D15'	I/O	I1Z,0Z3
32	-CE2	I	I3U
33	-VS1	O	GROUND
34	-IORD	I	I3U
35	-IOWR	I	I3U
36	-WE	I	I3U
37	RDY/BSY	O	OT1
38	VCC		POWER
39	-CSEL	I	I2Z
40	-VS2	O	OPEN
41	RESET	I	I2Z
42	-WAI	O	OT1
43	-INPACK	O	OT1
44	-REG	I	I3U
45	BVD2	I/O	I1U,0T1
46	BVD1	I/O	I1U,0T1
47	D08'	I/O	I1Z,0Z3
48	D09'	I/O	I1Z,0Z3
49	D10'	I/O	I1Z,0Z3
50	GND		GROUND



GENERAL TOLERANCE	FILE NO.	101-00205	PART NO.	101-00205-34	DRAWN	LQP	MATERIAL	DATE	SCALE	NO SCALE
X ± 0.50	REV.	A	TITLE	CF Conn.-34	CHECKED	楊		05/17/2006	UNIT	mm
.X ± 0.38	SIZE	A4	SHEET	2 OF 2	APPROVED	5/19/06				
.XX ± 0.25						5/12				





Shouh Min Industry (ShenZhen)CO.,LTD

REV.	ECN NO.	MODIFY CONTENT	DATE
A	ES00605	改版發行	06/17/2006


Pin Type	Interface Dim L	Pin No.
detect	3.50MM	25, 26
General	4.25MM	all other pins
power	5.00MM	1, 13, 38, 50

THE PART NUMBER:
101-00205-*

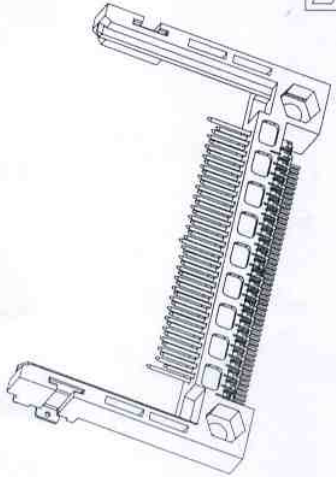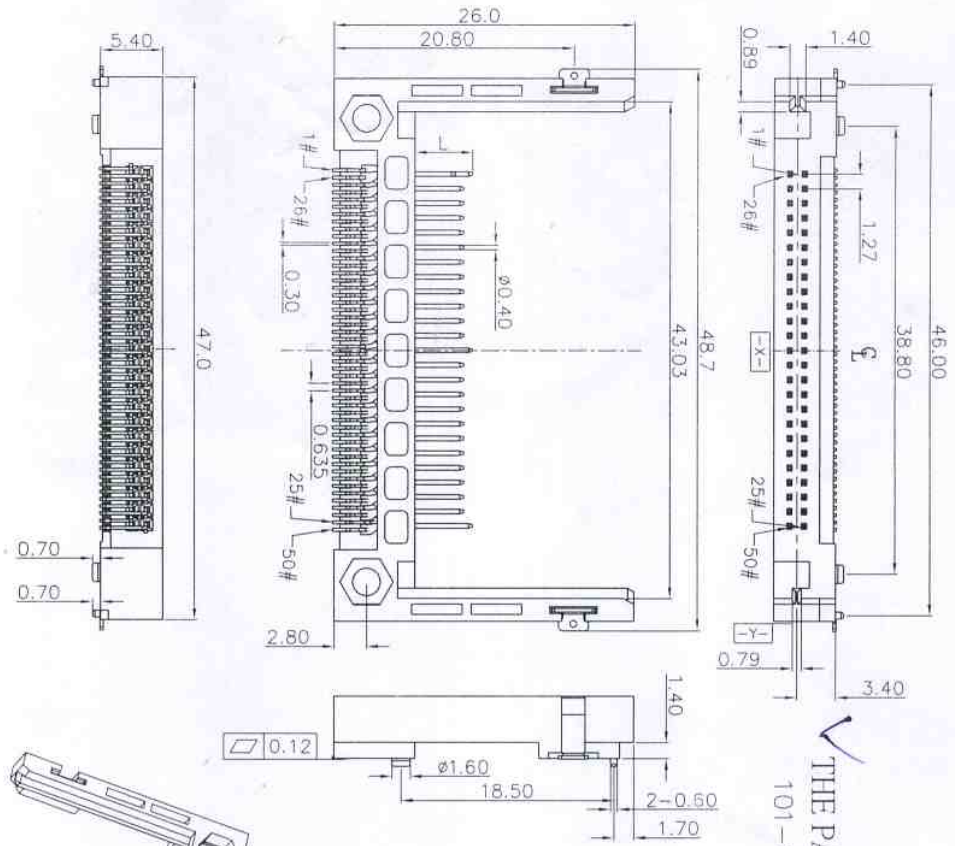

- 29:功能區鍍金1u", 接觸電阻絕對值至少160u"
- 30:功能區鍍金3u", 接觸電阻絕對值至少160u"
- 31:功能區鍍金5u", 接觸電阻絕對值至少160u"
- 32:功能區鍍金10u", 接觸電阻絕對值至少160u"
- 33:功能區鍍金15u", 接觸電阻絕對值至少160u"
- 34:功能區鍍金30u", 接觸電阻絕對值至少160u"
- 64:功能區鍍金1u", 接觸電阻絕對值至少160u"
- 65:功能區鍍金3u", 接觸電阻絕對值至少160u"
- 66:功能區鍍金5u", 接觸電阻絕對值至少160u"
- 67:功能區鍍金10u", 接觸電阻絕對值至少160u"
- 68:功能區鍍金15u", 接觸電阻絕對值至少160u"
- 69:功能區鍍金30u", 接觸電阻絕對值至少160u"

- Notes:
- 1.All Dimensions are in Millimeters.
 - 2.Operation voltage: 100 VAC max.
 - 3.Current rating : 1 Amps max.
 - 4.Contact resistance: 40m ohms max.
 - 5.Insulation resistance: 1000M ohms min. 500 VDC
 - 6.Dielectric withstanding voltage: 500 VAC/1minute
 - 7.Operating Temperature: -20°C to +60°C
 - 8.Storage Temperature: -40°C to +70°C
 - 9.Material see table.

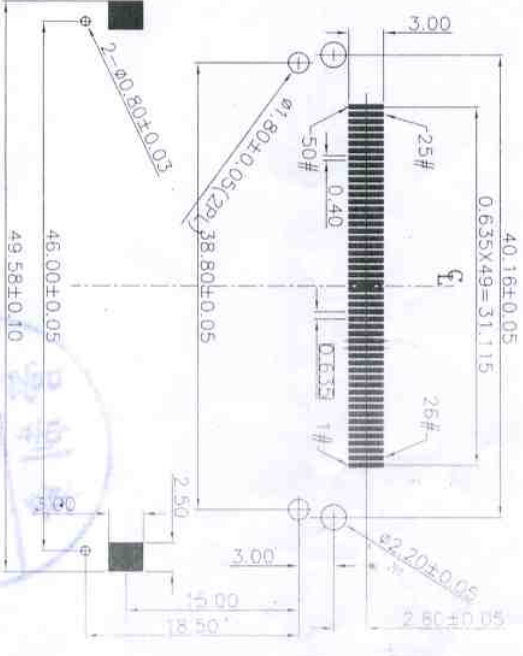

GENERAL TOLERANCE	FILE NO.	PART NO.	DRAWN	LOP	MATERIAL
X ± 0.50	X ± 5 °	101-00205			
X ± 0.38	X ± 2 °	A	CHECKED	李永成	DATE 05/17/2006
XX ± 0.25	XX ± 1 °	A4	APPROVED	李永成	SCALE UNIT NO SCALE
					SM Shouh Min Industry (ShenZhen)CO.,LTD

