

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
D		REVISED (ECR-09-025980)	27NOV09	JL	WK

- NOTE:
- MATERIAL:
 HOUSING: THERMOPLASTIC, UL 94V-0, COLOR: NATURAL.
 CONTACT: BRASS, THICKNESS=0.25mm.
 MOUNT EAR: BRASS, THICKNESS=0.30mm.
 MYLAR: POLYETHYLENE
 - FINISH:
 CONTACT: GOLD PLATED (SEE TABLE) IN CONTACT AREA,
 GOLD OR TIN PLATING (SEE TABLE) ON SOLDER TAILS,
 1.27um [50u"] MIN. NICKEL UNDERPLATED ALL OVER.
 MYLAR: POLYETHYLENE
 MOUNT EAR: 2.54um [100u"] MIN. TIN PLATED.
 - CONNECTOR REQUIRES USE OF 2 - SIZE M2 SCREWS FOR FASTENING TO PRINTED CIRCUIT BOARD.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

G/F	REEL	W/	15μ"	3-1734451-1	
MATTE-TIN 2.54um [100u"] MIN.	REEL	W/	15μ"	2-1734451-1	AVAILABLE
	TRAY	W/	30μ"	1-1734451-2	OBSOLETE
		W/	15μ"	1-1734451-1	
		W/O	30μ"	1734451-2	AVAILABLE
	W/O	15μ"	1734451-1		
PLATING ON SOLDER TAILS	PACKAGE	MYLAR	MIN. GOLD THICKNESS	PART NUMBER	PART STATUS

POWER	5.00mm	1, 13, 38, 50
GENERAL	4.25mm	ALL OTHER PINS
DETECT	3.50mm	25, 26
PIN TYPE	INTERFACE DIM. L	PIN NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S. CHIEN 21JAN2008	APVD W. KODAMA 21JAN2008	NAME PIN HEADER SLIM TYPE, 50 POS, TOP BOARD, COMPACT FLASH CARD
CHK S. HOU 21JAN2008	QUALIFICATION TEST REPORT 501-57118	SIZE A3
DIMENSIONS: MM TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± - 4 PLC ± - ANGLES ± 2'		SCALE 1 OF 3
MATERIAL SEE NOTE		FINISH SEE NOTE

TYCO ELECTRONICS
Tyco Electronics Corporation
Taipei, Taiwan

CAGE CODE: 00779
DRAWING NO: 1734451
REV: D

4

3



2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
DW				SEE SHEET 1.			

TRAY PACKING:AS SHOWN

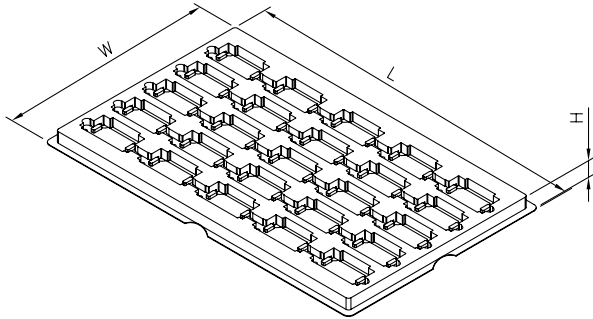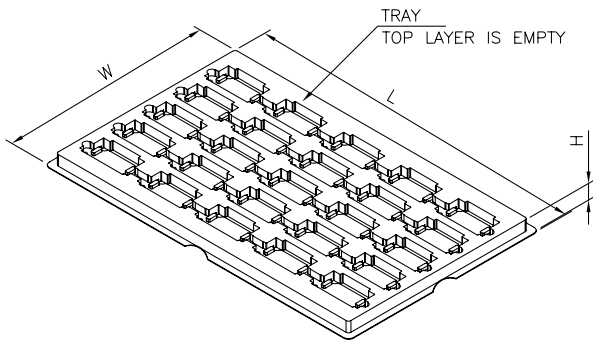

NOTES:


1. TRAY: PS.
SHIPPING CARTON: CORRUGATED FIBERBOARD
2. DIMENSION :
TRAY : L=346mm X W=215mm X H=7.5mm
SHIPPING CARTON : L=356mm, W=241mm, H=292mm
3. QUANTITY :
25 PCS/TRAY
40 TRAYS/SHIPPING CARTON (1,000PCS)
4. WEIGHT:
NET WEIGHT : 5.0 Kg
GROSS WEIGHT : 6.0 Kg

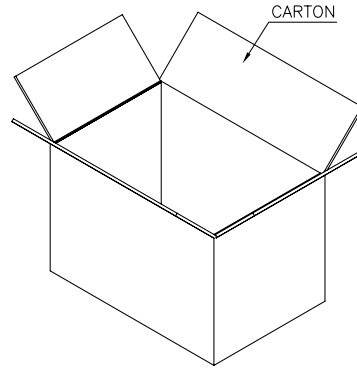



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Tyco Electronics Corporation Taipei, Taiwan	
DIMENSIONS: MM		CHK	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD	PIN HEADER SLIM TYPE, 50 POS, TOP BOARD, COMPACT FLASH CARD	
MATERIAL		PRODUCT SPEC	SIZE	RESTRICTED TO
FINISH		APPLICATION SPEC	CAGE CODE	DRAWING NO
		WEIGHT	A3 00779	©=1734451
		CUSTOMER DRAWING	SCALE	SHEET 2 of 3 REV D

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

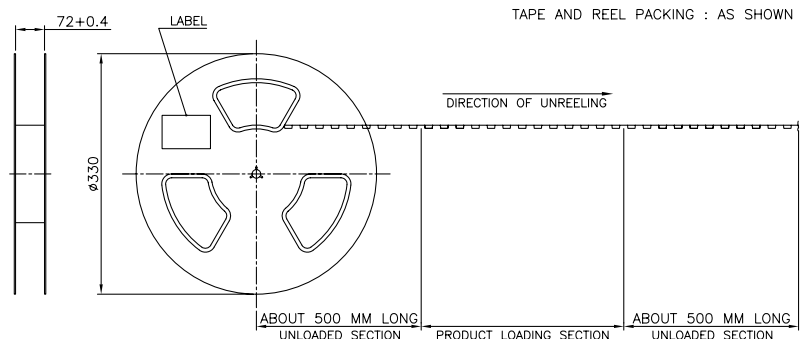

- NOTE:
- PACKAGING MATERIAL IN PLASTIC, RUBBER, INK, PIGMENT AND PAINT MUST MEET CONTROLLED SUBSTANCES TE SPEC PER 230-702 (REV.E).
 - * CADMIUM AND CADMIUM COMPOUNDS NOT TO EXCEED: 5 PPM.
 - * LEAD, CADMIUM, CHROM VI AND MERCURY NOT TO EXCEED: 100 PPM (COMBINED).
 - EACH BAG SHALL BE INCLUDED:
 - * DESICCANT
 - * HUMIDITY INDICATOR CARD
 - * MOISTURE SENSITIVITY LABEL
 - CARRIER TAPES, COVER TAPES, REELS AND TAPED COMPONENTS MUST MEET THE REQUIREMENTS DEFINED PER EIA-481-B.
 - CARTON MATERIAL : CORRUGATED FIBERBOARD
TAPE&REEL MATERIAL : PS
 - PEELING RESISTANCE : 0.1N~1.5N(10g~150g)
PEELING SPEED : 300mm/MIN

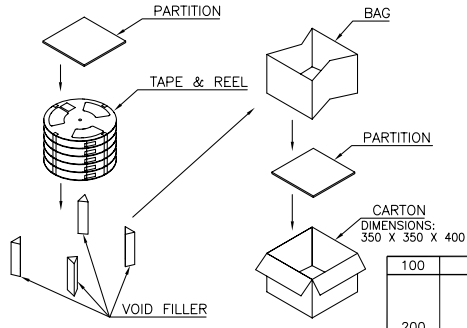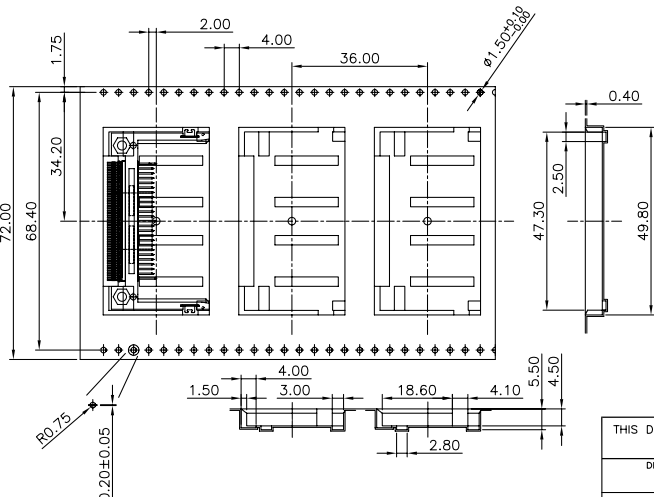

100	5	500	1.19	3.66	3-1734451-1
					2-1734451-1
					1-1734451-3
200	5	1000	3.45	7.9	1-1734451-2
					1-1734451-1
					1734451-2
					1734451-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Tyco Electronics Corporation Taipei, Taiwan	
DIMENSIONS: MM		CHK	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	PIN HEADER SLIM TYPE, 50 POS, TOP BOARD, COMPACT FLASH CARD	
0 PLC ±		PRODUCT SPEC	SIZE	
1 PLC ±		APPLICATION SPEC	CAGE CODE	
2 PLC ±		WEIGHT	DRAWING NO	
3 PLC ±			RESTRICTED TO	
4 PLC ±			A3 00779 ©=1734451	
ANGLES ±		CUSTOMER DRAWING	SCALE	SHEET 3 of 3
FINISH				REV D