


THIS DRAWING IS UNPUBLISHED.
 RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOG		DATE		REVISIONS			
GP	0	TR	LN	DESCRIPTION	DATE	BY	CHK
S				REVISED PER OS13-0254-02	26JULY02	JB	CC




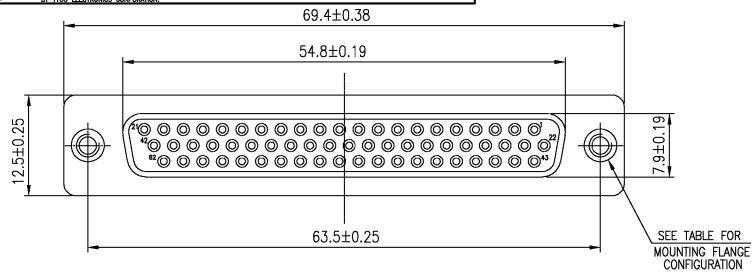


SEE TABLE FOR MOUNTING FLANGE CONFIGURATION

MATERIAL:

1. Housing: PBT, 30% G.F polyester, Black. (UL 94V-0 Rated)
2. Contact: Phos. Bronze.
3. Contact Plated: Gold Plated over 50u" Nickel underplated.
4. Solder Tail: Sn/Pb Plated 120u" over 50u" Nickel underplated.
5. Shell: Steel, Nickel Plated.
6. Rivet: Brass, Nickel plated 30u" Min.

△ Four digit date code in this format.

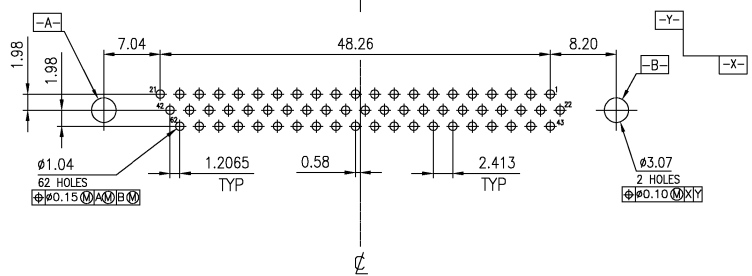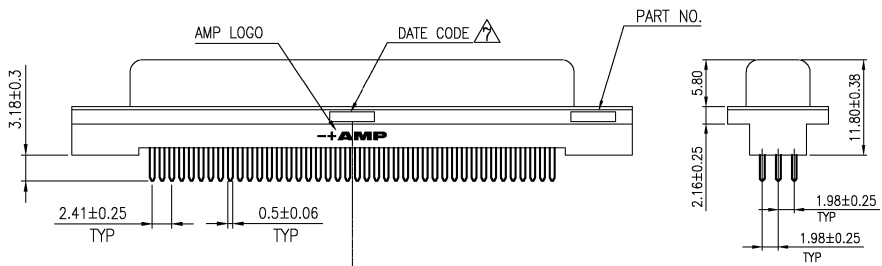

RECOMMENDED PCB LAYOUT

Tray	Detail B	Gold flash	3-747786-4
Tray	Detail B	15 μ"	3-747786-3
Tray	Detail B	30 μ"	747786-6
Packaging	Mounting Flange Config	Contact Finish	AMP Part NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		BY J. BURWELL 07JUN02	Tyco Electronics Corporation	
DIMENSIONS: TO DIMENSIONS UNLESS OTHERWISE SPECIFIED.		BY C. CASH 07JUN02	Tyco Electronics	
MM	3 PLC ± 0.30	PRODUCT SPEC	AMPLIMITE HD-22	
1 PLC ± 0.30	4 PLC ± 0.10	APPLICATION SPEC	62 POS RECEPTACLE, VERTICAL	
2 PLC ± 0.10	4 HOLE ± 0.1	WEIGHT	SIZE DATE CODE DRAWING NO	RESTRICTED TO
MATERIAL	FINISH	CUSTOMER DRAWING	A2 00779	747786
			SCALE 4:1	SHEET 1 of 1 REV S