


REV	ISS	DATE	BY	CHK	APP	DESCRIPTION	DATE	APP
AD	39					SEE SHEET ONE		

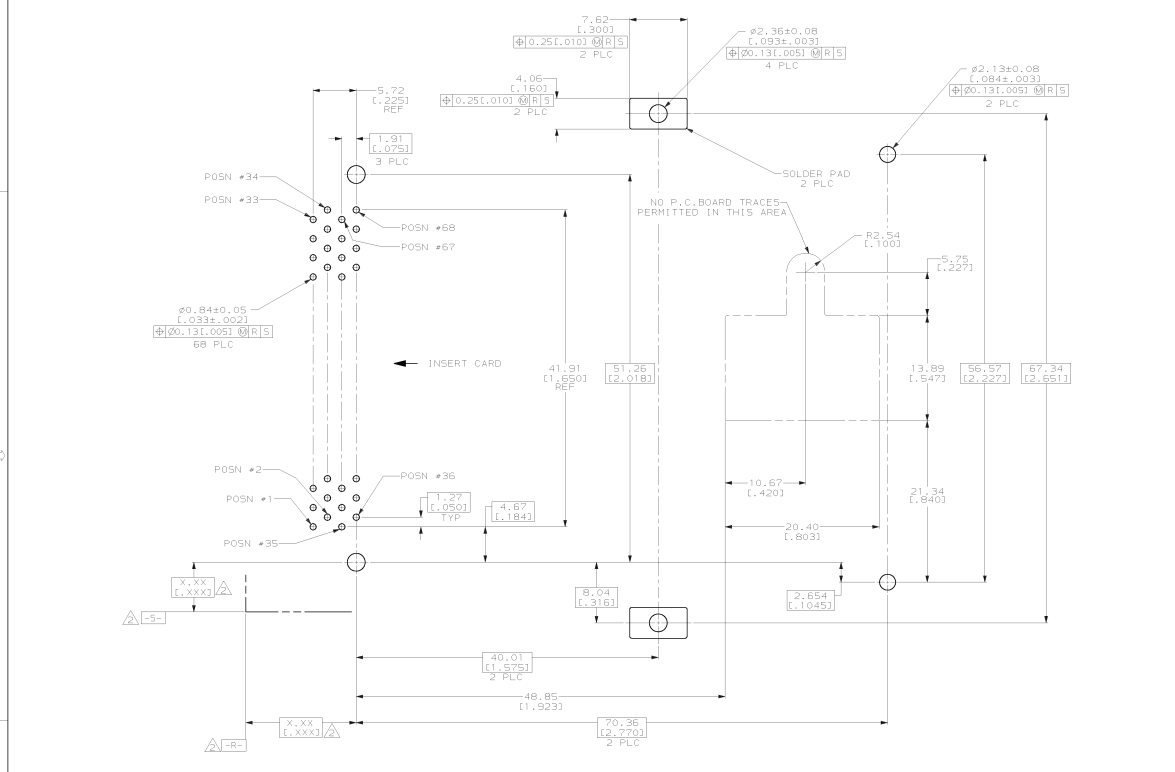

- ▲ 0.00076 [0.00030] MINIMUM GOLD IN CONTACT AREA.
- ▲ 0.00381 [0.00150] MIN TIN-LEAD ON SOLDER TAILS.
- ▲ ALL OVER 0.00127 [0.00050] MINIMUM NICKEL
- ▲ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 3. CONNECTOR REQUIRES USE OF 4 - SIZE 2M SCREWS FOR FASTENING TO PRINTED CIRCUIT BOARD
- ▲ RECESSED AMP AND CSA LOGOS LOCATED ON BOTH SIDES OF HOUSING.

RECOMMENDED BOARD LAYOUT

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES)		PART NO.	
DR	0/30/93	AMP Incorporated	
CHK	0/30/93	Harrisburg, PA 17105-9608	
APPD	0/30/93	NAME	
PROD	0/30/93	CONNECTOR ASSY, PIN HEADER WITH	
FINISH		RH EJECTOR, 68 POSN, TOP BD MFG,	
RETURN		THRU-HOLE, AMP MEMORY CARD	
APPLICATION SPEC		SIZE	00779
MATERIAL		CRG CODE	146025
FINISH		SCALE	4:1
RETURN		SHEET 2 OF 2	

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING AUTHORITY'S IDENTIFICATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

CUSTOMER DRAWING