


8 7 6 5 4 3 2 1

REVISIONS

NO.	DATE	BY	DESCRIPTION	DATE	APP'D
AD 00			SEE SHEET ONE		

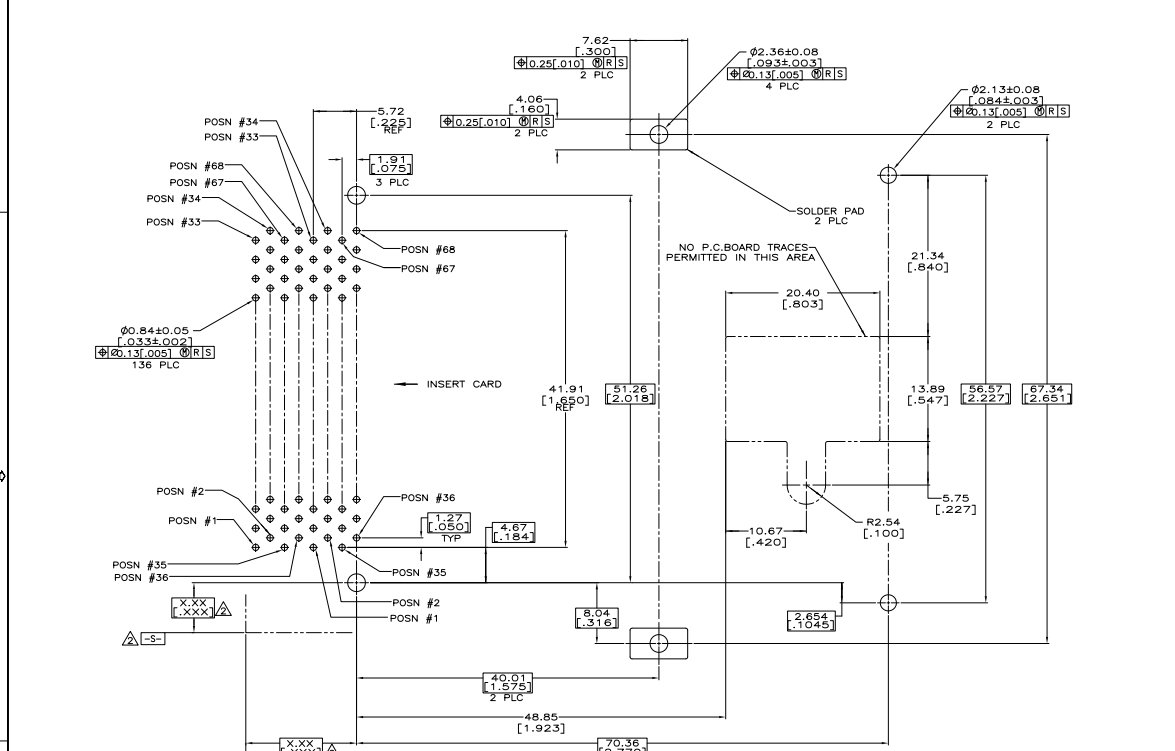

- △ 0.00076[0.00030] MINIMUM GOLD IN CONTACT AREA, 0.00381[0.00150] MIN TIN-LEAD ON SOLDER TAILS, ALL OVER 0.00127[0.00050] MINIMUM NICKEL
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 3. CONNECTOR REQUIRES USE OF 4 - SIZE 2M SCREWS FOR FASTENING TO PRINTED CIRCUIT BOARD
- △ RECESSED AMP AND CSA LOGOS LOCATED ON BOTH SIDES OF HOUSINGS.
- △ ASSEMBLY KEYED FOR 5 VOLT CARDS.
- △ ASSEMBLY KEYED FOR LOW VOLT CARDS (3.3V).
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINIS

△ OBSOLETE	1,17.34	ALL	36.67	146029-2
	35,51.68	OTHER PINS		
	1,17.34	ALL	36.67	146029-1
	35,51.68	OTHER PINS		
VOLTAGE KEYING	5.0	4.25	3.5	
	[.197]	[.167]	[.136]	

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES]		DR	8/20/93	AMP Incorporated
CHK	8/20/93	B	BUCKER	Harrisburg, PA 17105-3608
APPD	8/20/93	B	BUCKER	
MATERIAL	3 PLC DEC # 0.13 [0.005] INCHES # -	AMPD	8/20/93	
PRODUCT SPEC		B	BUCKER	
FINISH		APPLICATION SPEC		
WEIGHT		SIZE	CAGE CODE	DRAWING NO.
			00779	146029
		SCALE	4:1	SHEET 20F 2

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IF IT SUBJECT TO CHANGE AND THE CORRESPONDING REVISIONS SHOULD BE CONTACTED FOR THE LATEST REVISION.

CUSTOMER DRAWING