

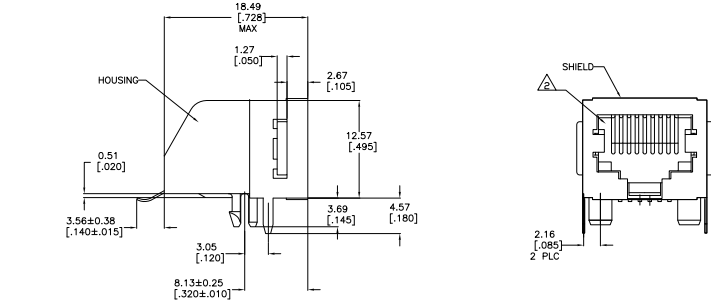



REV	DATE	DESCRIPTION	BY	CHK	APP
AA	00				
D		ECO-08-00886			25/AN2008/LAM/PR

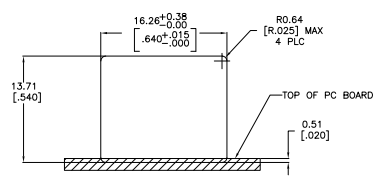

- MATERIAL:
 HOUSING - HTN NYLON MOLDING COMPOUND, 94 VO, COLOR: BLACK
 TERMINAL - 0.36[0.014] THICK PHOS-BRONZE
 PLATED WITH 1.27μm[0.00050] MINIMUM THICK HARD GOLD IN LOCALIZED GOLD PLATE AREA AND 3.81μm[0.00150] MINIMUM THICK MATTE TIN IN SOLDER AREA OVER 1.27μm[0.00050] THICK MINIMUM NICKEL UNDERPLATE.
 SHIELD - 0.25[0.010] THICK COPPER ALLOY PLATED WITH 3.0μm[0.000120] MINIMUM REFLOWED TIN
- CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68, SUBPART F
- DIMENSION MEASURED ALONG FRONT EDGES OF MATING FACE
- PACKAGING TAPE AND REEL: (PER EIA 481 SPECIFICATION)
 TAPE: 44[1.73] WIDE
 POCKET DEPTH: 17.65[0.695]
 POCKET PITCH: 32[1.26]
 CLEAR PSA TAPE TRAILER 160[6.30] MIN LENGTH
 PLASTIC REEL DIA 330[13.0]
 PIECES PER REEL: 100
- SNAP-IN RETENTION FEATURE ACCOMMODATES 1.44-1.71 [0.062±0.005] THICK PRINTED CIRCUIT BOARD.

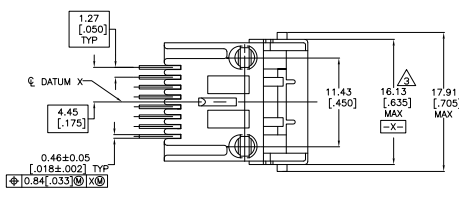

RECOMMENDED PANEL CUTOUT

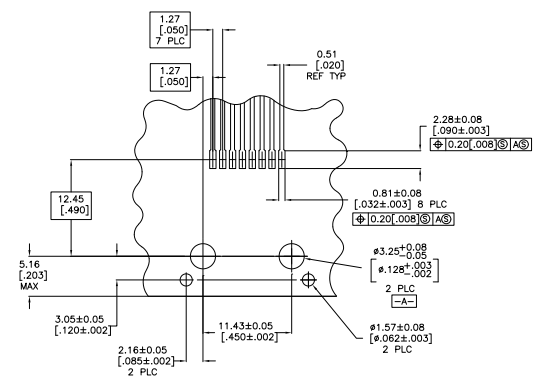

RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT (COMPONENT SIDE)

SUPERSEDED BY -1	TAPE & REEL	5558178-2
	TRAY	5558178-1
	PACKAGING TYPE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		REVISED	DATE	BY	APP	DATE	BY	APP
INCHES	UNLESS OTHERWISE SPECIFIED	108-1163	114-6040					
FRONT VIEW								
TOP VIEW								
RIGHT SIDE VIEW								
LEFT SIDE VIEW								
REVISIONS	SEE NOTE 1	SEE NOTE 1	CUSTOMER DRAWING					