

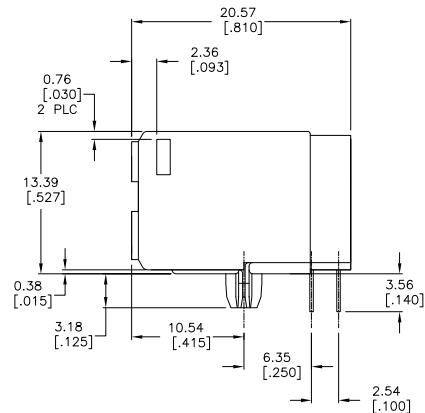
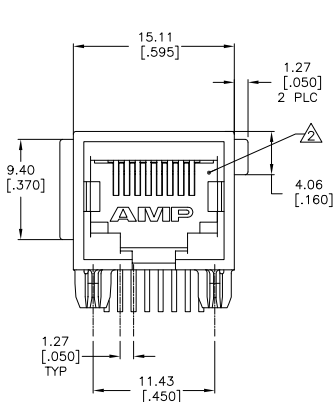
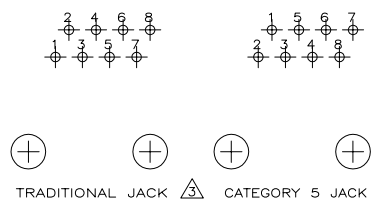


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		REVISONS		DATE	BY	APPD
AA	00	P	UR			
		B1	ECR-09-009746	28APR2009	TY	SY

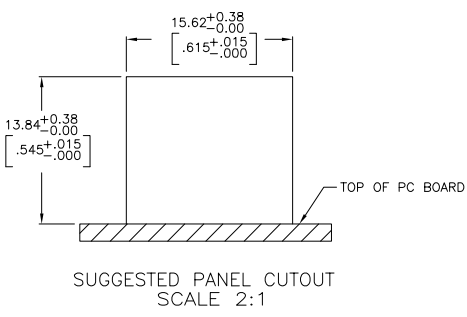

- ⚠ MATERIAL: HOUSING—HIGH TEMPERATURE NYLON, BLACK, UL 94V-0.
 TERMINALS - 0.33[.013] THICK PHOS BRONZE PLATED WITH 1.27μm[.000050] MINIMUM THICK HARD GOLD IN LOCALIZED AREA AND 3.81μm [0.00150] MINIMUM THICK MATTE TIN IN SOLDER AREA OVER 1.27μm[.000050] MINIMUM THICK NICKEL UNDERPLATE.
- ⚠ JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
- ⚠ CAUTION: CATEGORY 5 JACK SOLDER TAIL POSITIONS DO NOT FOLLOW SAME NUMBER SEQUENCE AS THAT OF TRADITIONAL JACKS.
- ⚠ USE #30 DRILL BIT OR 3.25mm DRILL BIT WHEN PRODUCING THESE PCB HOLES.

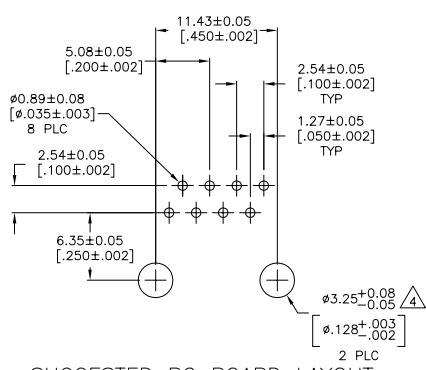

SUGGESTED PC BOARD LAYOUT COMPONENT SIDE

SUGGESTED PANEL CUTOUT SCALE 2:1

TRADITIONAL JACK ⚠ CATEGORY 5 JACK

5558343-1
 PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR: J. LATTUCA	2008P05	Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: mm (INCHES)		DR: S. WESTIMAN	2008P05	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		DR: S. FLICKINGER	2008P05	MODULAR JACK ASSEMBLY, B POSITION, RIGHT ANGLE, LOW PROFILE, CATEGORY 5, WITH PANEL STOPS
0 PLC ± -		PRODUCT SPEC	108-1163	
1 PLC ± -		APPLICATION SPEC	114-2048	SHEET 1 OF 1
2 PLC ± -		WEIGHT	A2 00779	
3 PLC ± -		FINISH	C=5558343	RESTRICTED TO
4 PLC ± -		SEE NOTE 1	CUSTOMER DRAWING	
5 PLC ± -		SEE NOTE 1	SCALE 4:1	REV B1