REVISIONS				
SYM	ZONE	DESCRIPTION	DATE	APPRD.
B		PROPOSAL	OCT09,06	LCHAN



FRONT VIEW

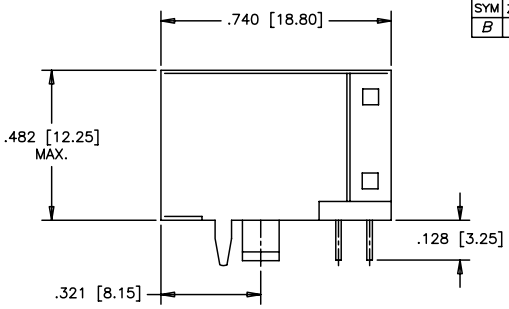

SIDE VIEW

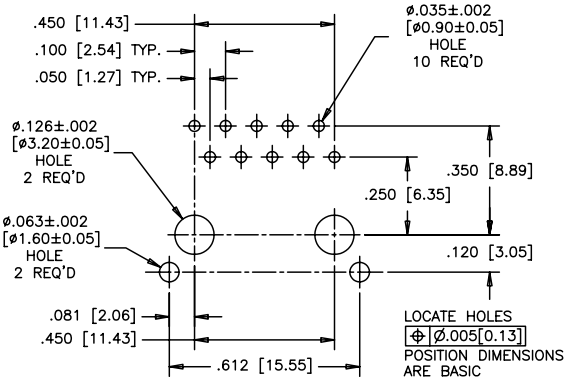

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

NOTE:

HOUSING AND INSERT:	ENGINEERING THERMOPLASTIC, FLAMMABILITY UL94V–0, COLOUR: BLACK
CONTACTS:	PHOSPHOR BRONZE. . GOLD PLATING: REFER TO AMPHENOL PART NUMBER SYSTEM FOR PLATING OPTIONS. 50 u" [1.27 MICRONS] MIN. NICKEL UNDERPLATE 100 u" [2.54 MICRONS] MIN. MATTE TIN ON CONTACT TAILS.
SHIELD:	COPPER ALLOY PLATING: NICKEL OVER COPPER UNDERPLATED.

RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING OR REFLOW SOLDERING AT 240°C MAX. FOR 5 SEC MAX.

AMPHENOL PART NUMBER: RJE05–1AA–1X10

GOLD PLATING
1 = 6 uINCH
2 = 15 uINCH
3 = 30 uINCH
4 = 50 uINCH

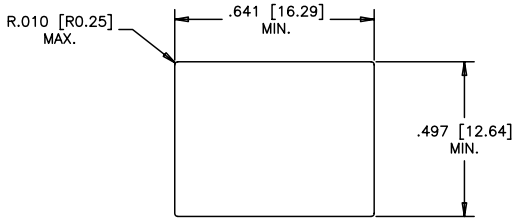

RECOMMENDED PANEL CUTOUT

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

MATERIAL	DRAWN Chigow Xu	DATE OCT09,06
-------	DESIGNED	
	CHECKED LCHAN	OCT09,06
	I. E. APPRD.	
	Q. A. APPRD.	
FINISH	DWG. APPRD.	
-------	ENG. REL. NO.	
	REF.	
	DIMENSIONS ARE IN INCHES [mm]	CODE ID. NO. 03554

Amphenol Canada Corp.

TITLE RJE05 SERIES MODULAR JACK, 10 POSITION, 10 CONTACTS, SHIELDED –RoHS COPLIANT

DWG	DRAWING NO.	REV.
C	P–RJE05–1AA–1X10	B

SCALE 4/1 | WT. ------ | SURF. ----- | SHEET 1 OF 1

Downloaded from Elcodis.com electronic components distributor