

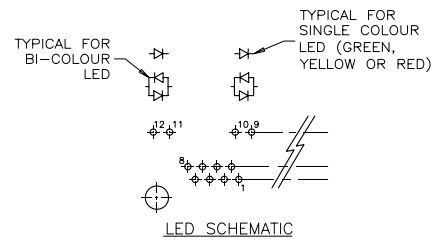
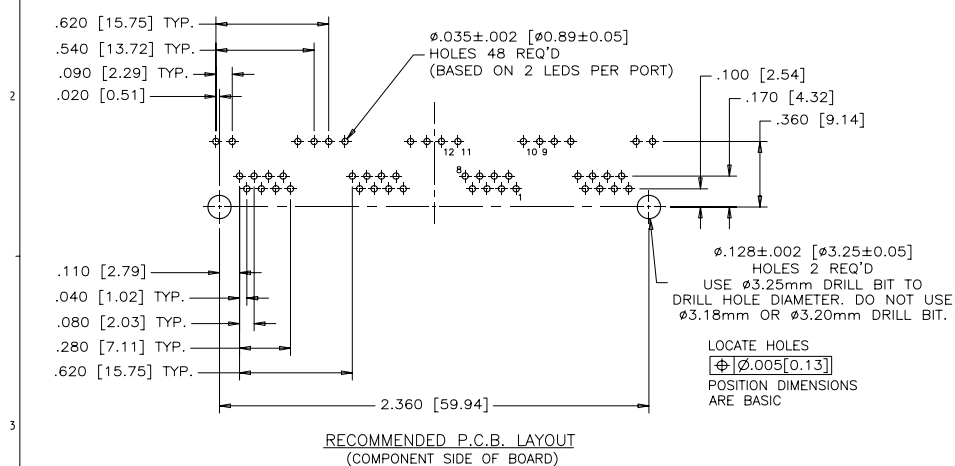


REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL	05/12/05	L.CHAN
B		PROPOSAL	APR07/06	L.CHAN
C		PROPOSAL	JULY 10,08	L.CHAN



LOCATE HOLES
 $\phi 0.128 \pm 0.002$ [$\phi 3.25 \pm 0.05$]
 HOLES 2 REQ'D
 USE $\phi 3.25$ mm DRILL BIT TO DRILL HOLE DIAMETER. DO NOT USE $\phi 3.18$ mm OR $\phi 3.20$ mm DRILL BIT.
 $\phi 0.005$ [0.13]
 POSITION DIMENSIONS ARE BASIC

MATERIALS:
 HOUSING: HIGH TEMPERATURE THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0
 COLOR: BLACK
 CONTACTS: PHOSPHOR BRONZE
 PLATING: 50 μ " [1.27 MICRONS]
 MIN. GOLD ON MATING SURFACES.
 50 μ " [1.27 MICRONS]
 MIN. NICKEL UNDERPLATE
 100 μ " [2.54 MICRONS]
 MIN. MATTE TIN ON CONTACT TAILS.
 RECOMMENDED SOLDERING TEMPERATURE:
 WAVE SOLDERING AT 260°C MAXIMUM FOR 5 SEC MAXIMUM.

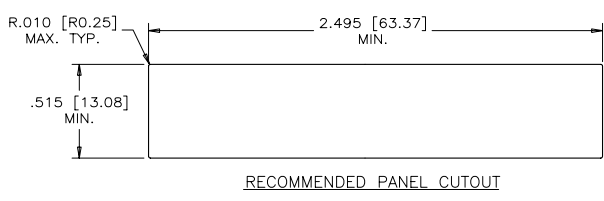

PART NUMBER: RJHSE-508X-04
 REFER TO LED OPTIONS DRAWING FOR ORDERING CODES

DRAWN PAULW	DATE 05/12/05	Amphenol Canada Corp.	
DESIGNED			
CHECKED CHIGOW	05/12/05	TITLE 4 PORT, HIGH SPEED, MODULAR JACK, 8 POSITION, 8 CONTACTS, UNSHIELDED WITH LED OPTIONS - ROHS COMPLIANT	
I. E. APPRD.		DWG. DRAWING NO. P-RJHSE-508X-04	
Q. A. APPRD.		REV. C	
DWG. APPRD.			
ENG. REL. NO.			
REF.			
DIMENSIONS ARE IN INCHES [mm]	CODE ID. NO. 03554	SCALE	WT. --- SURF. --- SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.