
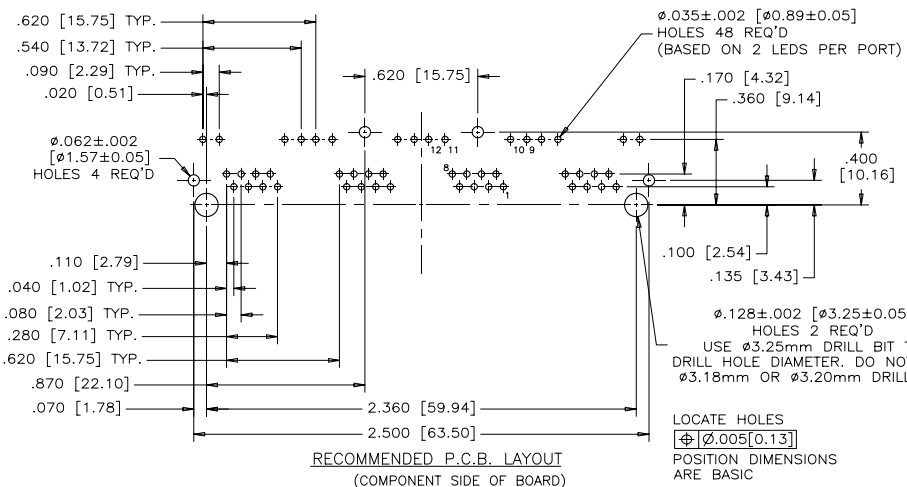
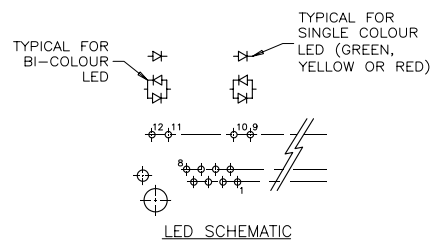

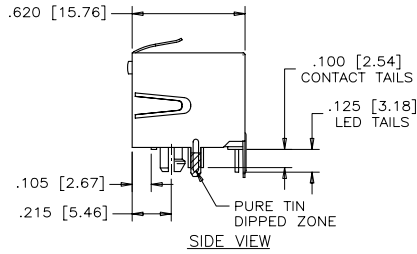


REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
D		PROPOSAL	APR14/06	L.CHAN
E		PROPOSAL	JULY 10,08	L.CHAN

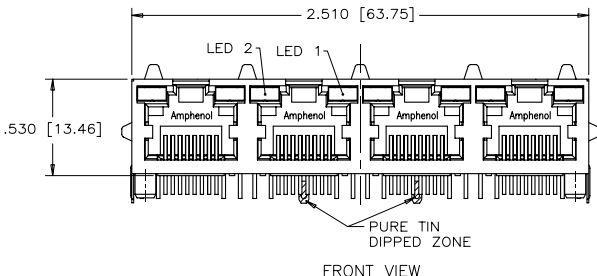


**MATERIALS:**  
 PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC  
 FLAMMABILITY RATING UL 94V-0  
 COLOR:BLACK

**CONTACTS:** PHOSPHOR BRONZE  
 PLATING: 50 µ" [1.27 MICRONS]  
 MIN. GOLD ON MATING SURFACES.  
 50 µ" [1.27 MICRONS]  
 MIN. NICKEL UNDERPLATE  
 100 µ" [2.54 MICRONS]  
 MIN. MATTE TIN ON CONTACT TAILS.

**SHIELD:** COPPER ALLOY  
 PLATING: NICKEL WITH PURE-TIN DIPPED PCB TAILS.

**RECOMMENDED SOLDERING TEMPERATURE:**  
 WAVE SOLDERING AT 260°C MAXIMUM FOR 5 SEC MAXIMUM.

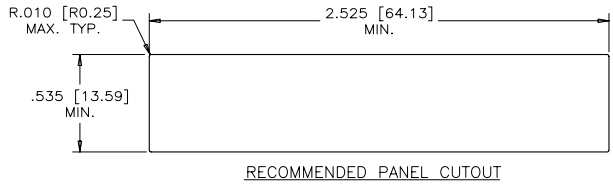

**PART NUMBER:** RJHSE-538X-04  
 REFER TO LED OPTIONS DRAWING FOR ORDERING CODES

DRAWN PAULW	DATE APR14/06	<b>Amphenol Canada Corp.</b> TITLE 4 PORT, HIGH SPEED, MODULAR JACK, 8 POSITION, 8 CONTACTS, SHIELDED WITH LED'S - RoHS COMPLIANT
DESIGNED		
CHECKED CHIGOW	APR14/06	
I. E. APPRD.		
Q. A. APPRD.		
DWG. APPRD.		DWG. DRAWING NO. P-RJHSE-538X-04
ENG. REL. NO.		REV. E
REF.		
DIMENSIONS ARE IN INCHES (mm)	CODE ID. NO. 03554	SCALE WT. SURF. SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.