




REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL	SEP21/06	L.CHAN

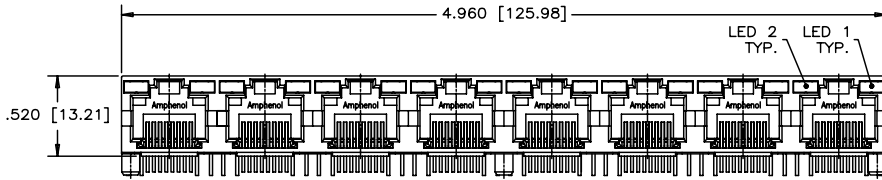


FRONT VIEW

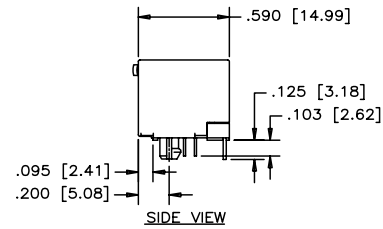


SIDE VIEW

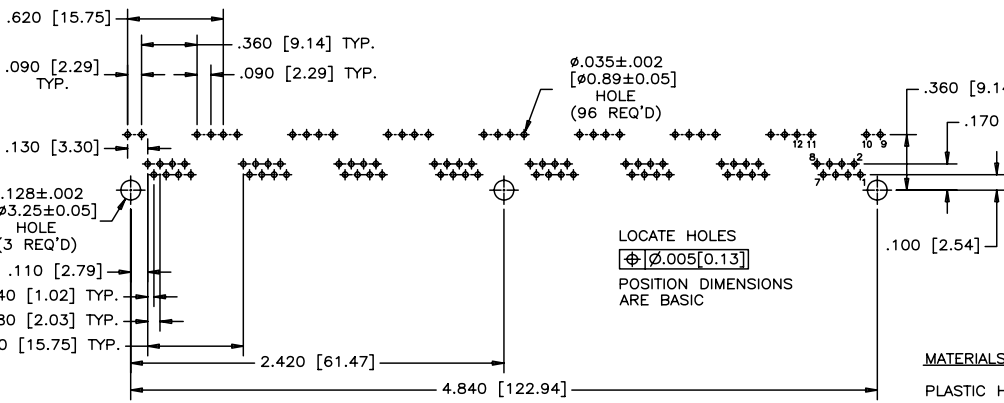

RECOMMENDED P.C.B. LAYOUT  
(COMPONENT SIDE OF BOARD)

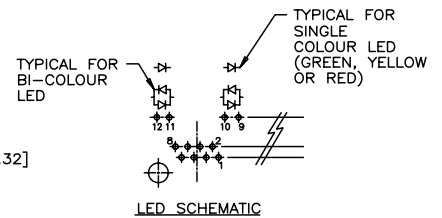

LED SCHEMATIC



BI-COLOUR LED DETAIL  
(RED/YELLOW AND GREEN/ORANGE LED'S ARE ALSO AVAILABLE)

**MATERIALS:**


PLASTIC HOUSING: ENGINEERING THERMOPLASTIC  
FLAMMABILITY RATING UL 94V-0

**CONTACTS:**

PHOSPHOR BRONZE  
PLATING: 50 MICROINCHES [1.27 MICRONS]  
MIN. NICKEL  
50 MICROINCHES [1.27 MICRONS]  
MIN. GOLD ON MATING SURFACES.  
100 MICROINCHES [2.54 MICRONS]  
MIN. TIN/LEAD ON CONTACT TAILS.

AMPHENOL PART NUMBER: RJHSE-508X-08

REFER TO LED OPTIONS DRAWING  
FOR ORDERING CODES

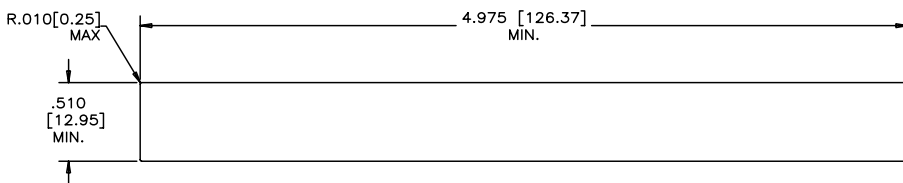

RECOMMENDED PANEL CUTOUT

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION  
MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING  
PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

DRAWN JACK WANG DATE SEP21/06	Amphenol Canada Corp.		
DESIGNED	TITLE 8 PORT HIGH SPEED MODULAR JACK, 8 POSITIONS, 8 CONTACTS, 2 LED'S PER PORT, WITHOUT SHIELD- RoHS COMPLIANT		
CHECKED CHIGOW XU SEP21/06	DWG. NO.	P-RJHSE-508X-08	REV. A
I. E. APPRD.	SCALE	WT. -----	SURF. -----
Q. A. APPRD.	DIMENSIONS ARE IN INCHES [mm]	03554	CODE ID. NO
DWG. APPRD.	SHEET 1 OF 1		