



REV	DESCRIP	DATE	APPRVD

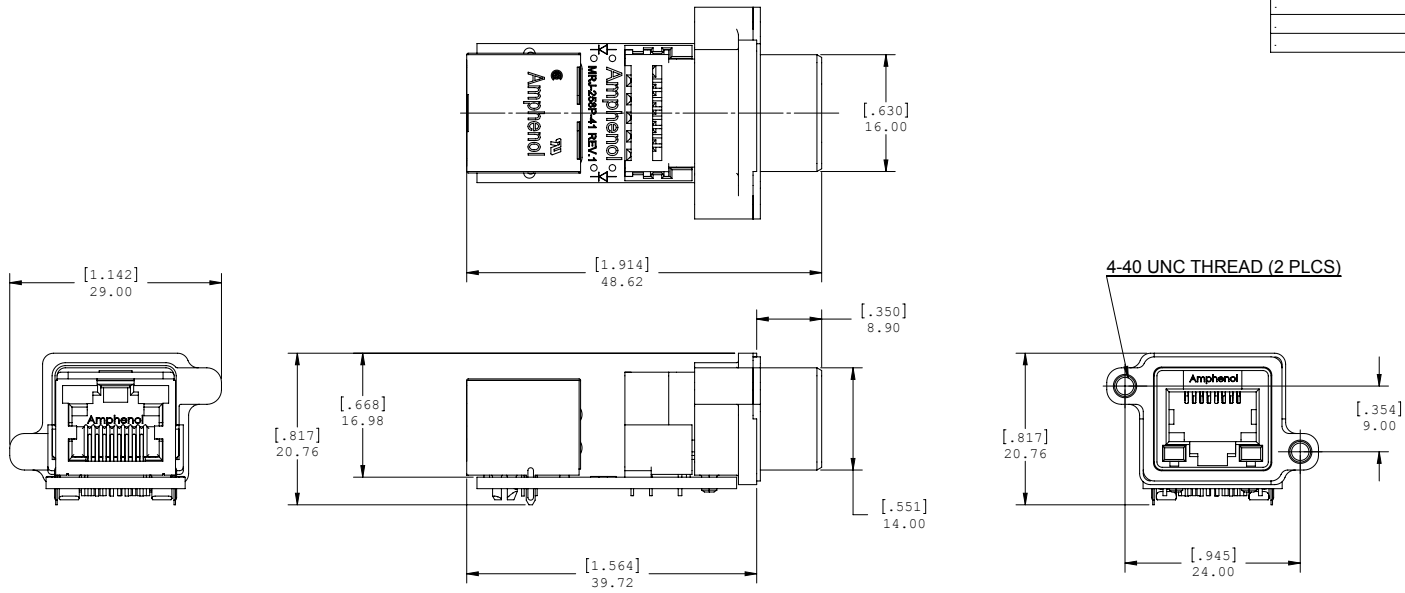

4-40 UNC THREAD (2 PLCS)

**NOTES:**


- COMPONENTS:
  - CONNECTOR: MRJ-538X-0X, RECEPTACLE, 8 CONTACTS.
  - TERMINATION: RJ45, PLUG.
- FEATURE: SEALED CONNECTOR IN THE MATED AND UNMATED CONDITIONS.
- OPERATING TEMPERATURE: -40°C TO +105°C.
- CONNECTOR MEETS CATEGORY CAT5E REQUIREMENTS DESCRIBED IN TIA/EIA-568-B.1 PART 2.
- ENVIRONMENT PERFORMANCE: IP67.
- ALL COMPONENTS AND MATERIALS USED FOR CONNECTOR AND PACKAGING ARE ROHS COMPLIANT PER EU DIRECTIVE 2002/95/EC AND AMENDMENTS.

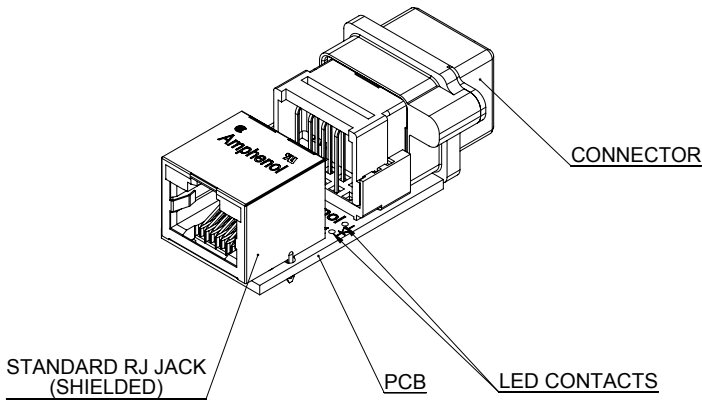

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETER TOLERANCES ARE:		APPROVALS	DATE	Amphenol Canada Corp.	
DECIMALS	ANGLES	DRAWN	JAN01/07	TITLE <b>MRJ CONNECTOR WITH RJ45 TERMINATION</b>	
XX ± .10	± 1°	S.SEMENOV	JAN01/07		
X ± .25		DESIGNED			
		S.SEMENOV			
MATERIAL AND FINISH		CHECKED		SIZE	C
REF.		QA APP'D		DWG. NO.	P-MRJ-578X-X1
CODE IDENT. NO.		IE APP'D		PROJECT	MRJ
		DWG APP'D	JAN01/07	SCALE	1:0.4
		A.GREEN		SHEET	1 OF 2

DO NOT SCALE DRAWING  
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.

REV	DESCRIPT	DATE	APPRVD

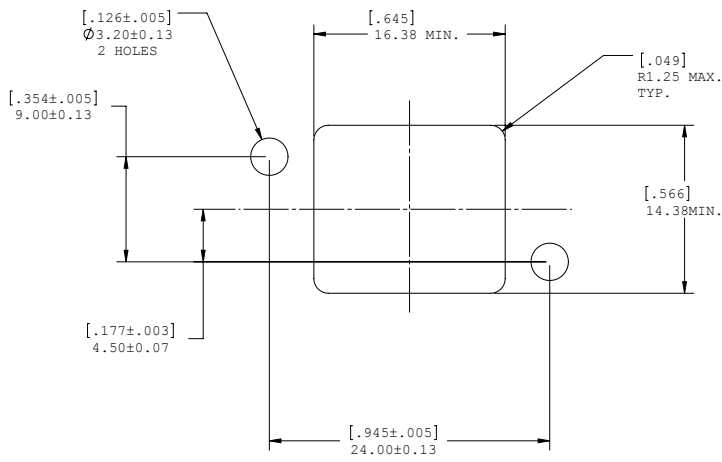

**RECOMMENDED PANEL CUTOUT**



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETER TOLERANCES ARE:		APPROVALS	DATE	Amphenol Canada Corp.		
DECIMALS	ANGLES	DRAWN	JAN01/07	TITLE		
XX ±.10	±1°	S.SEMENOV	JAN01/07			
X ±.25		DESIGNED	JAN01/07	MRJ CONNECTOR WITH RJ45 TERMINATION		
		S.SEMENOV				
MATERIAL AND FINISH		CHECKED		SIZE	DWG. NO.	REV
REF.		QA APP'D		C	P-MRJ-578X-X1	2A
CODE IDENT. NO.		IE APP'D		SCALE	PROJECT	SHEET
		DWG APP'D	JAN01/07	4:1	MRJ	2 OF 2
		A.GREEN				

DO NOT SCALE DRAWING  
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.