

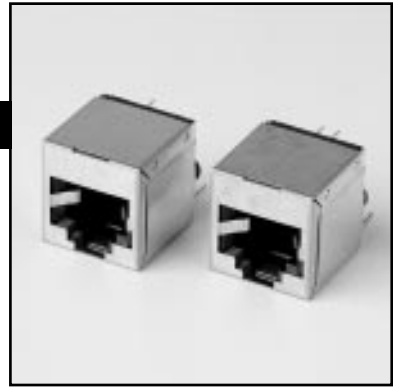


# Series: PJ012-S

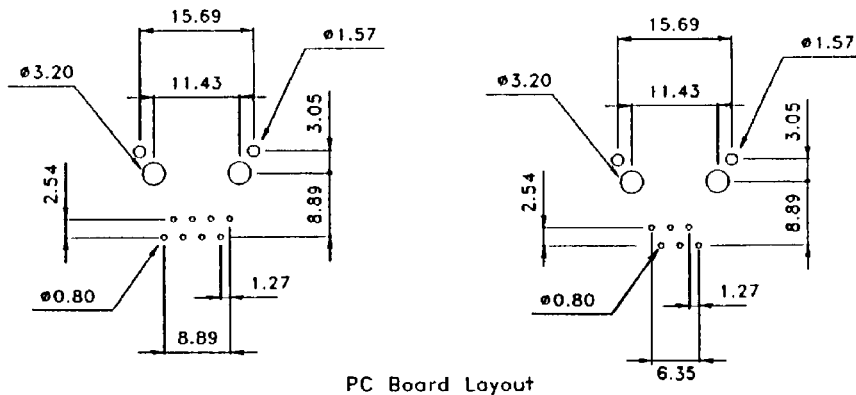

- ❖ Shielded version of the PJ012
- ❖ 10 Position available, consult factory

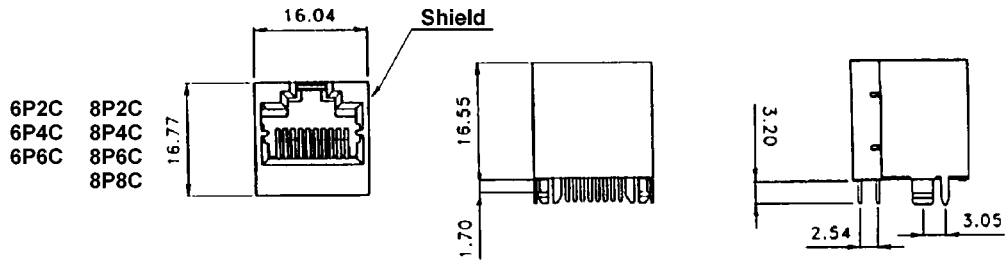

# Specifications

## Phone Jack Series:

### PJ

#### Ratings:

Current	1.5A
Dielectric strength	1000V RMS for 1 minute
Contact resistance	20mΩ max.
Insulation resistance	500MΩ min.
Spring wire durability	500 mating cycles min.
Operating temperature	-25°C / +90°C

#### Material:

Plastic	PBT, Glass-filled UL94V-0
Color	Black
Spring wire	0.45mm Dia., Phosphor Bronze Gold plated over Nickel

## ORDERING PROCEDURE

     1    -         2                 3                 4    -         5

1) Series

2) Number of Positions (# P)

3) Number of Contacts (# C)

4) Plating:

1 = Full Flash Gold

2 = Full 10μ Gold

3 = Full 30μ Gold

4 = Full 50μ Gold

5) Series options:

B = Ferrite Bead (only available on PJ031)

F = Flanged

S = Shield

K = Keyed

H = Shorting Bar (available only on PJ008, 8 position)