

4

3

2





1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION.  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

REV	DATE	BY	APPD
U	10-02-98	EVE	-
V	31-05-08	MO	-
V1	08-07-08	AEG WRV	-

NOTES:

- FOR APPLICATION INFORMATION SEE THE SPECIFICATION 114-19005.
- FOR PERFORMANCE REQUIREMENTS SEE THE SPECIFICATION 108-19039.

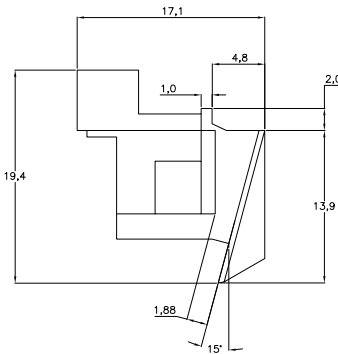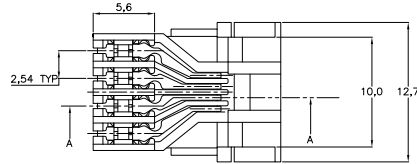


CONTACT PLATING IN THIS AREA :  
1.25µm MIN. TIN.

CONTACT AREA GOLD PLATING THICKNESS :  
SEE TABLE.

UNDERPLATING ON ENTIRE CONTACT :  
1.25µm MIN. NICKEL.

MATERIAL OF CONTACTS :  
PHOS. BRONZE.

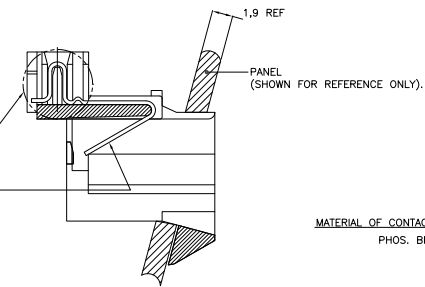

SECTION A-A

OBSOLETE	600 PCS. ON 60 cm DIA. REEL	ABS	2-166925-5
OBSOLETE	3000 PCS IN A BOX	COLOR-BLACK, METALLIC FILTER	166925-5
OBSOLETE	600 PCS. ON 60 cm DIA. REEL	ABS	2-166925-3
OBSOLETE	3000 PCS IN A BOX	COLOR GREY (RAL 9002)	166925-3
		NYLON, 13%G.F. COLOR-BLACK	166925-1
	PACKAGING	GOLD PLATING IN CONTACT AREA	HOUSING MATERIAL
			ORDER NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DESIGNER: D. KESSLER	0504092	Tyco Electronics Corporation	
DIMENSIONS: mm		CHK: C. STERKEN		Tyco Electronics 's-Hertogenbosch, Nederland	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD:		NAME	
0 PLG	±	PRODUCT SPEC		MODULAR JACK, 4 POS./4 CONT	
1 PLG	±	APPLICATION SPEC		FLANGED, WITH INSULATION DISPLACEMENT CONTACTS	
2 PLG	±	WEIGHT		SIZE	CAGE CODE
3 PLG	±	FINISH		A2	00779
4 PLG	±	SEE NOTES		166925	RESTRICTED TO
ANGLES	±				-
FINISH					
SEE NOTES		CUSTOMER DRAWING		SCALE	NTS
				SHEET	1 of 1
				REV	V1