



THIS DRAWING IS UNPUBLISHED
 UNLESS INDICATED OTHERWISE
 © 2005 BY TYS ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHK	APP
J	08S 2, REV ECO-07-02649		LH	SA	
K	REVISED FOR ECO-08-031715		12MAY09	AEG	JGG

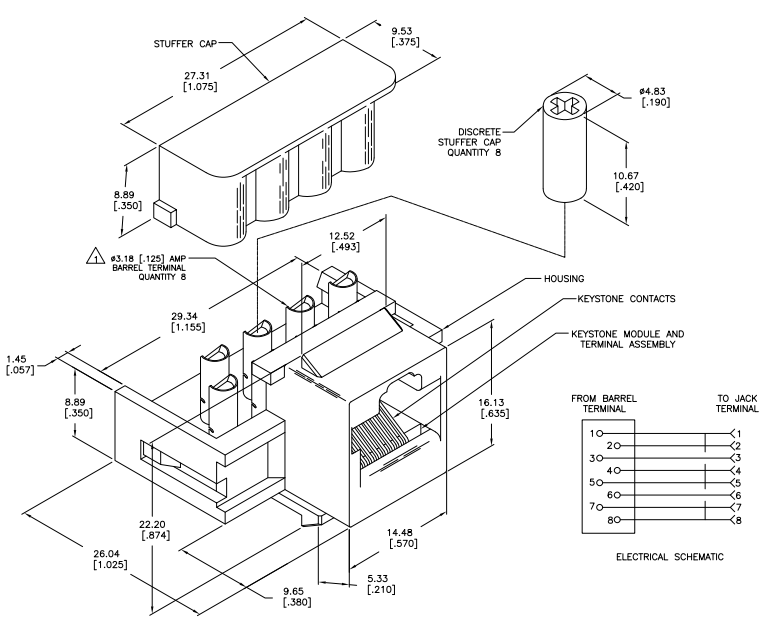

- 1. BARREL TERMINAL WIRE RANGE: 19-28 AWG SOLID OR STRANDED WIRE. MAXIMUM INSULATION DIAMETER IS 1.65 [.062].
- 2. MOUNTING PANEL THICKNESS: 1.57 [.062] NOMINAL.
- 3. MATERIALS:
 8 POSITION STUFFER CAP-POLYCARBONATE, NATURAL.
 DISCRETE STUFFER CAP-NYLON 6/6.
 BARREL TERMINAL-TIN COATED PHOSPHOR BRONZE.
 CONTACTS-NICKEL PLATED HIGH STRENGTH COPPER ALLOY HAVING SELECTIVE GOLD PLATING ON CONTACT AREA AND SELECTIVE TIN PLATING ON BARREL TERMINAL AREA.
 HOUSING AND KEYSTONE-THERMOPLASTIC, 94 V-0 RATED, SEE TABLE FOR COLORS.
 STUFFER CAPS SHIPPED NOT ASSEMBLED.
 BARREL TERMINALS WILL ACCOMMODATE ONE OR TWO WIRES OF THE SAME TYPE AND WITHIN PLUS OR MINUS ONE WIRE GAUGE SIZE.

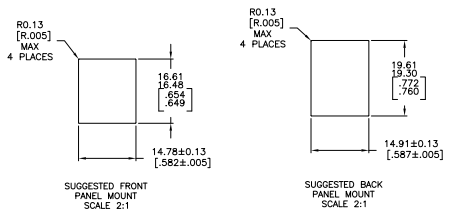

HOUSING COLOR	STUFFER COLOR	WIRE RANGE	DESCRIPTION	PART NO.
BLACK	NATURAL	24-28 AWG	KIT WITH 8 DISCRETE STUFFER CAPS	5-555322-2
OBSOLETE	OBSOLETE	22-26 AWG	KIT WITH 1 EIGHT POSITION STUFFER CAP	5-555322-1
BLACK	NATURAL	24-28 AWG	KIT WITH 8 DISCRETE STUFFER CAPS	555322-2
OBSOLETE	OBSOLETE	22-26 AWG	KIT WITH 1 EIGHT POSITION STUFFER CAP	555322-1

THIS DRAWING IS A CONTROLLED DOCUMENT. TYS ELECTRONICS CORPORATION, Harrisburg, PA 17105-3608

DESIGNER: J. JONES
 CHECKER: J. CHANDLER
 DATE: 08/07/09

KEYSTONE JACK KIT, 8 POSITION, KEYED, COMMERCIAL

SIZE: A1
 DATE: 08/07/09
 DRAWING NO: 555322
 REVISED TO: 00779

CUSTOMER DRAWING