

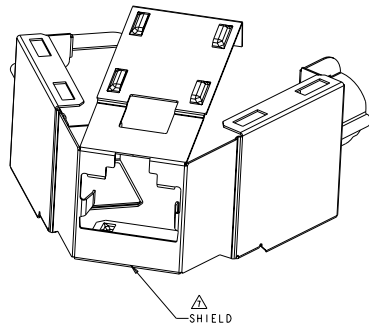
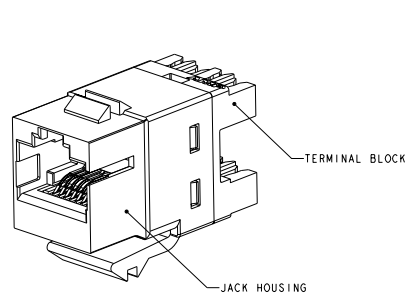
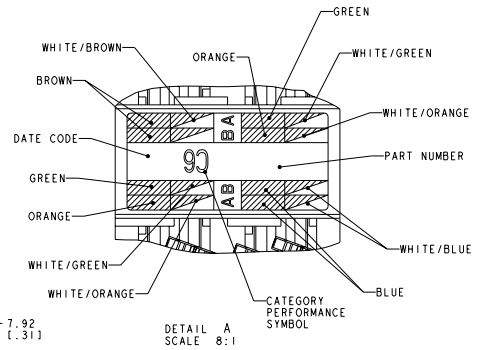



REV	DATE	DESCRIPTION	BY	CHK	APP
E	REV: ECO-09-001942				
F	REV: ECO-09-012893				



- △ MATERIAL: JACK HOUSING - POLYPHENYLENE OXIDE, 94V-0 RATED, 110 BLOCK - POLYCARBONATE, ARRAY TRAY - PBT POLYESTER, JACK CONTACTS ARRAY - BERYLLIUM COPPER, PLATED WITH 1.27µm (.00050) MINIMUM THICK GOLD IN LOCALIZED AREA AND 3.81µm (.000150) MINIMUM THICK MATTE TIN IN BOARD INTERFACE AREA OVER 1.27µm (.00050) MINIMUM THICK NICKEL UNDERPLATE, IDC TERMINALS - PHOSPHOROUS BRONZE, PLATED WITH 3.81µm (.00015) MINIMUM THICK MATTE TIN OVER 1.27µm (.00050) MINIMUM THICK NICKEL UNDERPLATE.
- 2. SL 110 JACK WILL TERMINATE 22-24 AWG SOLID CONDUCTORS, 1.27(.050) MAXIMUM INSULATION DIAMETER.
- △ CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68 SUBPART F REQUIREMENTS.
- 4. MOUNTING PANEL THICKNESS 1.47 - 1.60 (.058 - .063).
- △ THESE TWO SUGGESTED CUTOUT OPENINGS ARE USED IN TANDEM WITH DUAL FRONT AND BACK CUTOUTS.
- △ ONE MODULAR JACK ASSEMBLY AND ONE SHIELD PER POLYBAG.
- △ SHIELD SHIPPED NOT ASSEMBLED.
- △ JACKS MATE WITH SECURE RJ45 PLUGS ONLY. KEY COMBINATIONS 1 THROUGH 4, 8 AND 9 - SHOWN ON SHEET 2. COMPONENTS REMOVED FROM RESPECTIVE VIEWS FOR CLARITY.
- 9. REFER TO 408-8858 FOR TERMINATION INSTRUCTIONS USING SL SERIES TOOL TERMINATION. REFER TO 408-8417 FOR TERMINATION INSTRUCTIONS USING 110 PUNCH DOWN TOOL.





1479795-1 KEY 1 SHOWN

COLOR CODE	IDC TERMINAL	MODULAR JACK
WHITE/BLUE		5
BLUE		4
WHITE/ORANGE		3
ORANGE		2
WHITE/GREEN		1
GREEN		6
WHITE/BROWN		7
BROWN		8

ELECTRICAL SCHEMATIC T568A

COLOR CODE	IDC TERMINAL	MODULAR JACK
WHITE/BLUE		5
BLUE		4
WHITE/ORANGE		1
ORANGE		2
WHITE/GREEN		3
GREEN		6
WHITE/BROWN		7
BROWN		8

ELECTRICAL SCHEMATIC T568B



PACKAGE	KEY	COLOR	PART NUMBER
9	ORANGE		1479795-9
8	VIOLET		1479795-8
4	BLUE		1479795-4
3	GREEN		1479795-3
2	YELLOW		1479795-2
1	RED		1479795-1


DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION
13JUL2005	DR. GABRIELE	ASSEMBLY, SL 110 JACK, SHIELDED, CAT 6, SECURE RJ45, REAR ENTRY	13JUL2005	DR. DOOLEY	
13JUL2005	DR. DOOLEY		13JUL2005	DR. DOOLEY	

ASSEMBLY, SL 110 JACK, SHIELDED, CAT 6, SECURE RJ45, REAR ENTRY


SCALE CODE (drawing no) 00779 ©-1479795

CUSTOMER DRAWING


REV. NO.		REVISIONS			
DATE	BY	DESCRIPTION	DATE	BY	APP.
00	HM	SEE SHEET 1			




1479795-1
KEY 1, RED




1479795-2
KEY 2, YELLOW




1479795-3
KEY 3, GREEN



1479795-4
KEY 4, BLUE



1479795-8
KEY 8, VIOLET



1479795-9
KEY 9, ORANGE

DATE: 13 JUL 2005 TIME: 10:00 AM DRAWN BY: J. DOOLEY CHECKED BY: J. DOOLEY APPROVED BY: J. DOOLEY PART NO.: 1479795-1		DATE: 13 JUL 2005 TIME: 10:00 AM DRAWN BY: J. DOOLEY CHECKED BY: J. DOOLEY APPROVED BY: J. DOOLEY PART NO.: 1479795-2		DATE: 13 JUL 2005 TIME: 10:00 AM DRAWN BY: J. DOOLEY CHECKED BY: J. DOOLEY APPROVED BY: J. DOOLEY PART NO.: 1479795-3	
DATE: 13 JUL 2005 TIME: 10:00 AM DRAWN BY: J. DOOLEY CHECKED BY: J. DOOLEY APPROVED BY: J. DOOLEY PART NO.: 1479795-4		DATE: 13 JUL 2005 TIME: 10:00 AM DRAWN BY: J. DOOLEY CHECKED BY: J. DOOLEY APPROVED BY: J. DOOLEY PART NO.: 1479795-8		DATE: 13 JUL 2005 TIME: 10:00 AM DRAWN BY: J. DOOLEY CHECKED BY: J. DOOLEY APPROVED BY: J. DOOLEY PART NO.: 1479795-9	
TITLE: ASSEMBLY, SL 110 JACK, SHIELDED, CAT 6, SECURE RJ45			SCALE: 1:1 SHEET: 2 OF 2		
CUSTOMER DRAWING			PART NO.: 1479795		