
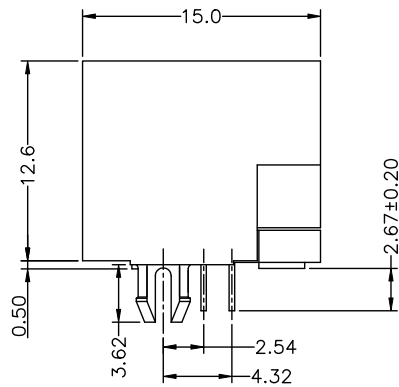


D1RFRD006

REVISION RECORD				
REV	ECCO	DESCRIPTION	DRFT	CHKD

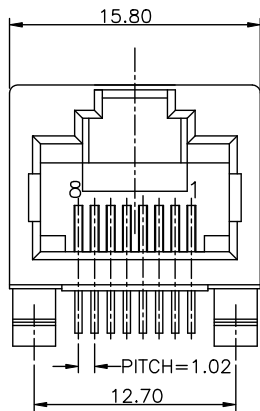

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.
- OPERATING: 750 CYCLES MIN.

MECHANICAL:


- HOUSING MATERIAL : FR52 UL94V-0. COLOR-BLACK.
- INSERT MATERIAL : FR52 UL94V-0. COLOR-BLACK.
- CONTACT MATERIAL : PHOSPHOR BRONZE 0.35mm THICKNESS.
- PLATING : GOLD PLATING OVER NICKEL.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
 - OPERATION: 0°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: E 5J 8 8 - 0 0 L J 0 X-L

1-3u" 2-6u"
3-15u" 4-30u" 5-50u"

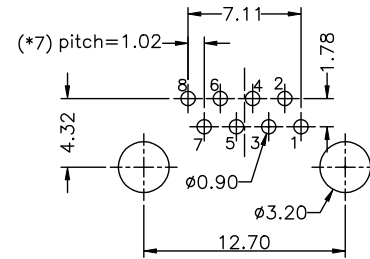

PC Board Thickness=1.60mm
PC Board Layout Component Side Shown

DFTO PETERS DATE 12/23/04 CHKD JAKE DATE 2004/12/23 MFO DATE APPVLUSHENG DATE 2004/12/23		FULL RISE ELECTRONIC CO., LTD	
TOLERANCES EXCEPT AS NOTED MM .0 ± 0.20 * .00 ± 0.15 * .000 ± 0.075 *		TITLE LED JACK UTP W/O LED	
ANGLES ± THIRD ANGLE PROJECTION		DRAWING NO. GE5J3176 /PART NO. SEE NOTE	
MATERIAL : QTY : FINISH : SCALE : 4:1		SIZE A3 REV 0	SHEET 1 OF 1

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

H
G
F
E
D
C
B
A