

**NOTES:**

**ELECTRICAL:**


1. VOLTAGE RATING : 125 VAC RMS .
2. CURRENT RATING : 1.5 AMP .
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

**MECHANICAL:**

1. HOUSING MATERIAL : GLASS FILLED PBT 94V-0 COLOR-BLACK.
2. CONTACT MATERIAL : PHOSPHOR BRONZE. t=0.35mm
3. PLATING : CONTACT AREA-SELECTIVE GOLD PLATING.
3. PLATING : TAILS-TIN 150u" MIN OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER: 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

**ENVIRONMENTAL:**

1. STORAGE TEMPERATURE: -40°C TO +85°C.
2. OPERATION TEMPERATURE: -40°C TO +85°C.
3. WAVE SOLDERING TEMPERATURE: 230-250°C (3-5 SECOND).
4. RoHS COMPLIANT

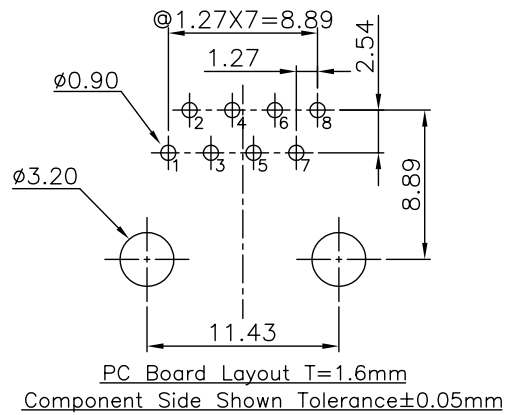

PART NUMBER
E5288-700C44-L

RoHS Compliant			
TITLE RJ45 TOP ENTRY PCB JACK (DIP TYPE)			
DFTO Cathy DATE 2006/09/19	DRAWING NO. CE523031-LC /PART NO. SEE TABLE	SIZE A3	REV 0
SCALE :		DO NOT SCALE DRAWING	SHEET 1 OF 1

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

H  
G  
F  
E  
D  
C  
B  
A