


DIRFRD006

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		ADD NEW P/N	10/28/06 JAMYN	

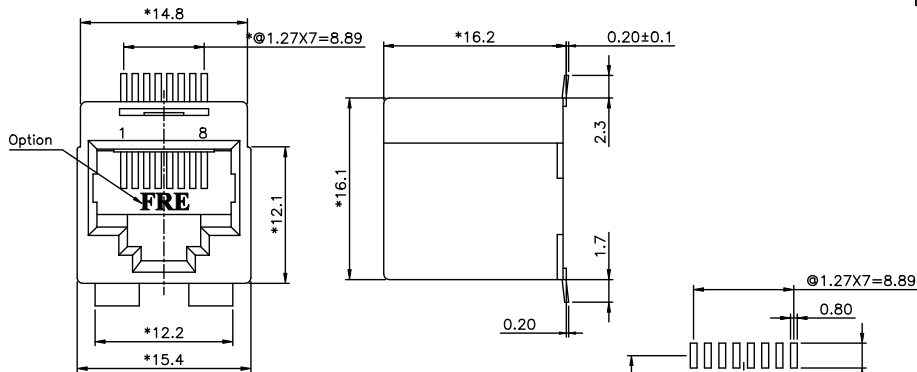

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : HIGH TEMP. UL94V-0.
COLOR: BLACK
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION POST-SOLDER: 10 LBS MIN.



ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: 0°C TO +70°C.
3. WAVE SOLDERING TEMPERATURE: 255°C TO 265°C(5~10SECONDS).

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

CUL FILE NO. E163191

ROHS PART NUMBER: E528X-X00XBX-L

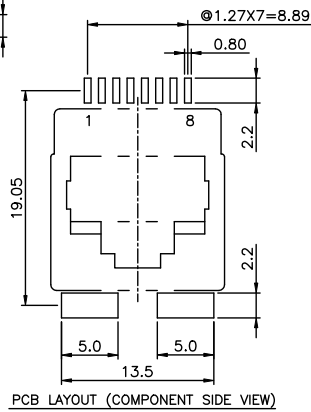

DIM (INCH) → TOLERANCES EXCEPT AS NOTED .0 ±0.2 ± .00 ±0.15 ± .000 ±0.075 ±		DFTO JAMYN DATE 10/24/05 CHKD/DRVE DATE 2005/10/28 MFD DATE APP'VAL/USH#EG DATE 2005/10/28	FULL RISE ELECTRONIC CO., LTD TITLE TOP ENTRY PCB JACK 8P SMT
ANGLES ± 0.01° THIRD ANGLE PROJECTION	MATERIAL : QTY : FINISH : SCALE : 3:1	DRAWING NO. GE523007-LA /PART NO. SEE NOTE	SIZE REV A3 1 10/24/05
DO NOT SCALE DRAWING		SHEET X	OF Y

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

H
G
F
E
D
C
B
A