


D1RFRD006

REVISION RECORD				
REV	ECCO	DESCRIPTION	DRFT	CHKD

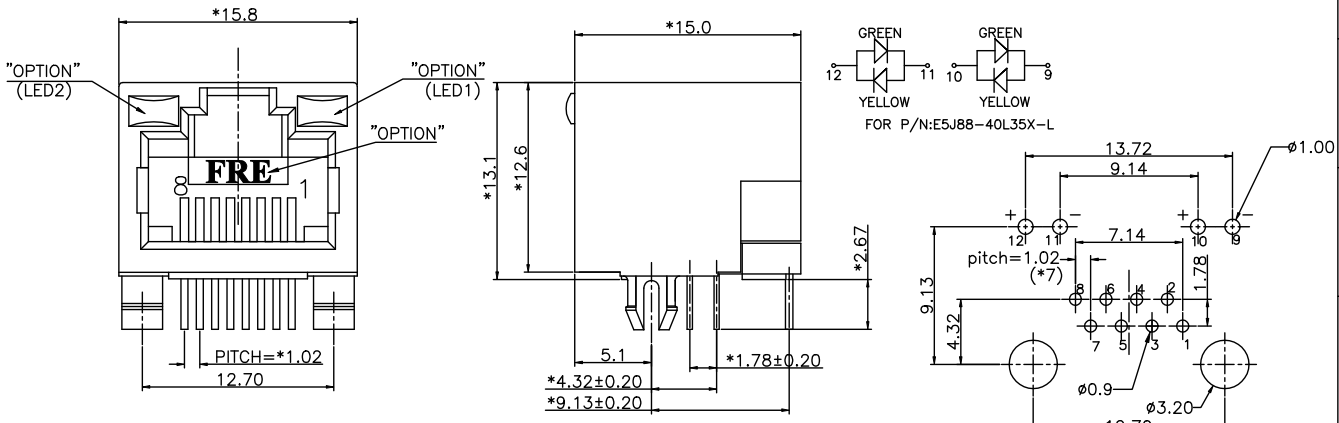

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.
- LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL.
REVERSE VOLTAGE: 5 VOLTS MAXIMUM.
- OPERATING: 750 CYCLES MIN.

MECHANICAL:


- HOUSING MATERIAL : FR52 UL94V-0. COLOR-BLACK.
- INSERT MATERIAL : FR52 UL94V-0. COLOR-BLACK.
- BACK PLATE MATERIAL : FR52 COLOR-BLACK.
- LED SIZE : 3,2*2,0*7,0*P=2,54mm.
- CONTACT MATERIAL : PHOSPHOR BRONZE 0,35mm THICKNESS
- PLATING : GOLD PLATING OVER NICKEL.
- PCB RETENTION PRE-SOLDER: 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO 70°C.
- WAVE SOLDERING TEMPERATURE: 255~265°C(5~10 SECONDS)

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

CUL File No:E163191



PART NUMBER: E 5 J 8 8 - X 0 L 3 5 X - L

- 1-LED1:GREEN ,LED2:YELLOW
- 2-LED1:GREEN ,LED2:GREEN
- 3-LED1:YELLOW ,LED2:GREEN
- 4-LED1:G+Y ,LED2:G+Y
- 5-LED1:RED ,LED2:GREEN
- 7-LED1:YELLOW ,LED2:YELLOW
- E-LED1:GREEN ,LED2:RED
- V-LED1:Y+G ,LED2:Y+G

PC Board Layout(t=1.60)

- PLATING:1-3u"
- 2-6u"
- 3-15u"
- 4-30u"
- 5-50u"

<p>MM (INCH)</p> <p>TOLERANCES EXCEPT AS NOTED</p> <p>.0 ± 0.20 ±</p> <p>.000 ± 0.075 ±</p> <p>ANGLES ±</p> <p>THIRD ANGLE PROJECTION</p>		<p>DFTO YANGLAN DATE 07/11/05</p> <p>CHKD.JAKE DATE 2005/07/11</p> <p>MFO DATE</p> <p>APPELLUSHENG DATE 2005/07/11</p> <p>MATERIAL :</p> <p>QTY :</p> <p>FINISH :</p> <p>SCALE : 4:1</p>	<p>FULL RISE ELECTRONIC CO., LTD</p> <p>TITLE</p> <p>W/O SHIELD LED JACK</p> <p>DRAWING NO. GESJ3183-LA</p> <p>7/PART NO. SEE NOTE</p> <p>DO NOT SCALE DRAWING</p> <p>SHEET 1 OF 1</p>
---	--	--	--

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

H
G
F
E
D
C
B
A