
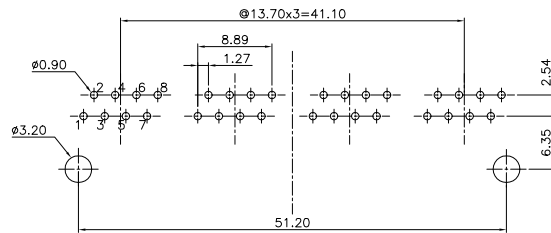


D1RFRD006

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		DRAWING MODIFY	05/21/03	
△		Add P/N	08/06/04	
△		NOTES MODIFY	10/22/04	

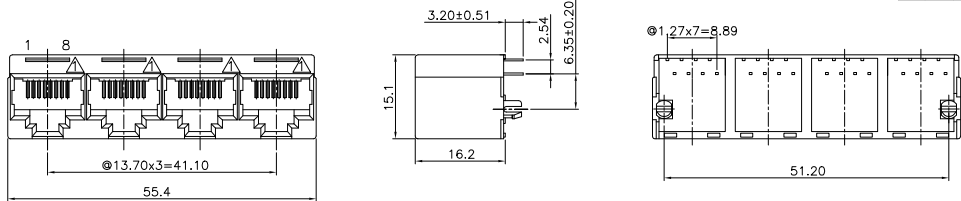

PC Board Layout
Component Side Shown

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
 - OPERATION: -40°C TO +85°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: E5288-30C14XXX △

- | | | |
|--------|--------|------------------|
| 1- 3u" | 2- 6u" | FREE - TIN LEAD |
| 3-15u" | 4-30u" | -L - LEAD FREE △ |
| 5-50u" | | |

MM (INCH)	DFTD Teng	DATE 7/13/99	FULL RISE ELECTRONIC CO., LTD
TOLERANCES EXCEPT AS NOTED	CHKD SHAWBY	DATE 2004/11/17	
DELETED LISTS	MFG	DATE	TITLE TOP ENTRY GANG JACK W/O SHIELD (4 PORTS)
.0 ±0.20	APPLVLLSHENG	DATE 2004/11/17	DRAWING NO. GE523036
.00 ±0.15	MATERIAL :		/PART NO. SEE NOTE
.000 ±0.075	ANGLES ±	QTY :	SIZE REV
	THIRD ANGLE PROJECTION	FINISH :	A3 3
		SCALE : 1.5:1	DO NOT SCALE DRAWING
			SHEET X OF Y

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

H
G
F
E
D
C
B
A