
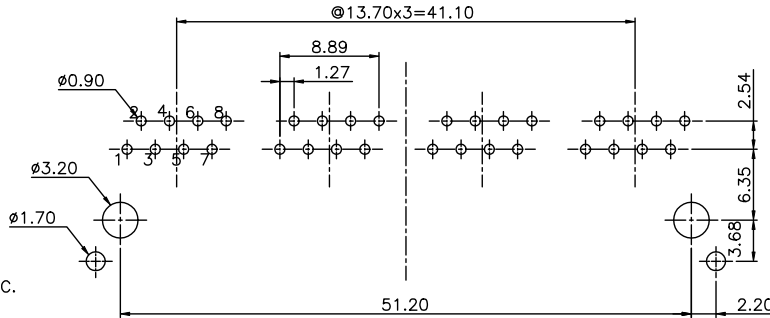


D1RFRD006

REVISION RECORD				
REV	ECC	DESCRIPTION	DRFT	CHKD
△		MODIFY P/N.	ANKUE	8/13/05

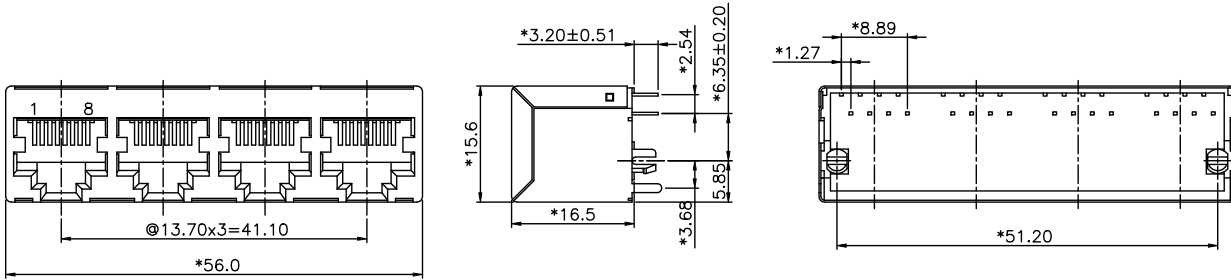

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
 - OPERATION : -40°C TO +85°C.
 - WAVE SOLDER TEMPERATURE : 230°C TO 250°C 3~5 SECOND.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

△PART NUMBER: E5288-3XCX4X-L

- SHIELD: 1- 3u" 2- 6u" 3- 15u" 4- 30u" 5- 50u"
- 1-TIN △0-PBT+20%G.F.
- 2-NICKEL 1-PBT+30%G.F.
- 4-SHIELD NICKEL PLATED ;TINNED TABS

← MM (INCH) →		DFTO YJK	DATE 4/12/99	FULL RISE ELECTRONIC CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKD SMYTY	DATE 2005/08/13	TITLE	
MFO		DATE		TOP ENTRY GANG JACK	
MATERIAL :		APPLY LUSHENG	DATE 2005/08/13	DRAWING NO. GE523009_LC	
FINISH :		QTY :		/PART NO. SEE NOTE	
SCALE :		DO NOT SCALE DRAWING		SIZE	REV
SHEET X		OF Y		A3	1

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1