
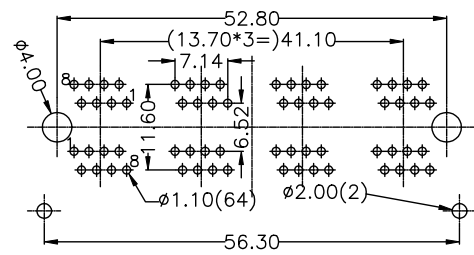
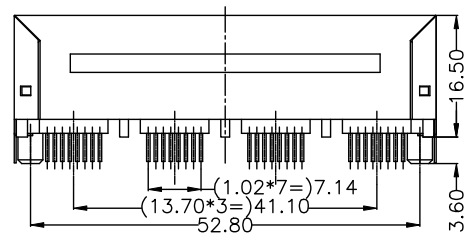



D1RFRD006

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
Δ		NOTES MODIFY	Amend	10/22/04

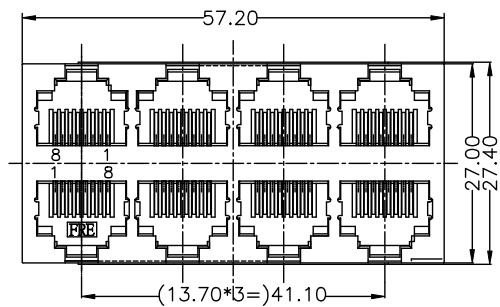

- NOTES:**
- ELECTRICAL:**
- VOLTAGE RATING : 125 VAC RMS.
 - CURRENT RATING : 1.5 AMP.
 - CONTACT RESISTANCE : 35 MILLIOHMS MAX.
 - INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
 - DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.
- MECHANICAL:**
- HOUSING MATERIAL : PBT+30%
 - CONTACT MATERIAL : PHOSPHOR BRONZE 0.46mm.
- Δ 3. PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
 - PCB RETENTION PRE-SOLDER: 1 LB MIN.
 - PCB RETENTION POST-SOLDER: 10 LBS MIN.
- ENVIRONMENTAL:**
- STORAGE : -40°C TO +85°C.
 - OPERATION: -40°C TO +85°C.
- Δ MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
- PART NUMBER: E5288-YXCBOX
- | | | |
|---|-------------|---------|
| L | 1- 3U" | 2- 6U" |
| | 3- 15U" | 4- 30U" |
| | 5- 50U" | |
| N | W/O LOGO | |
| C | W/ FRE LOGO | |

MM (INCH)	DFTO CZH	DATE 1/31/02	FULL RISE ELECTRONIC CO., LTD
TOLERANCES EXCEPT AS NOTED	CHKD WFO	DATE	
MM ±	APPV L	DATE	TITLE
0 ±0.20 ±	MATERIAL :		2X4 TOP ENTRY PCB JACK
.00 ±0.15 ±	QT'Y :		DRAWING NO. GE523013
.000 ±0.075 ±	FINISH :		/PART NO. SEE NOTE
ANGLES ±	SCALE : 2:1		DO NOT SCALE DRAWING
THIRD ANGLE PROJECTION			SHEET X OF Y

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

H
G
F
E
D
C
B
A