



DESCRIPTION: R/A .318" FEMALE ECONOMY D-SUB

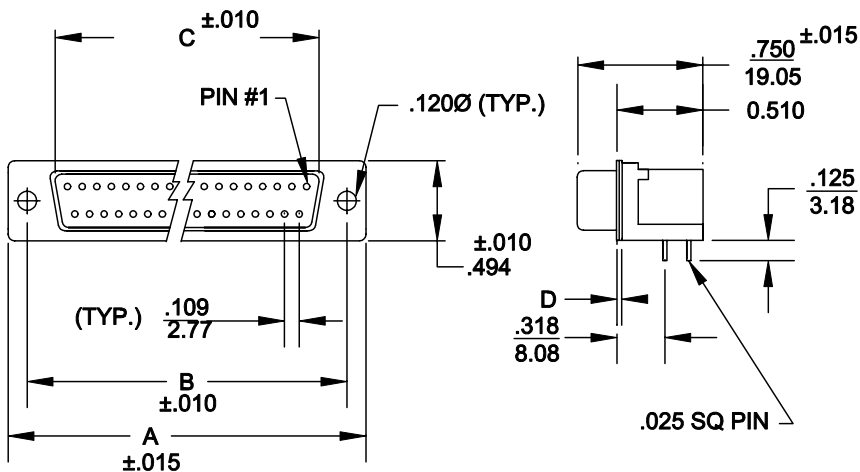

	A	B	C	D
9	1.213	.984	.642	.030
	30.81	24.99	16.30	0.76
15	1.541	1.312	.971	.030
	39.14	33.32	24.65	0.76
25	2.088	1.852	1.512	.030
	53.04	47.04	38.40	0.76
37	2.729	2.500	2.157	.030
	69.32	63.50	54.80	0.76

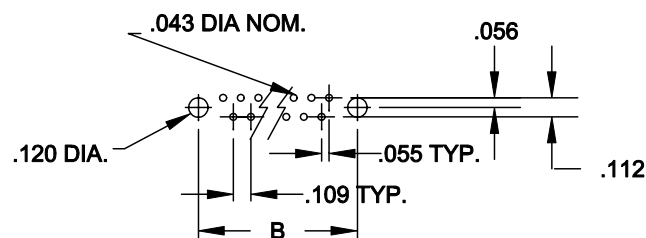

SPECIFICATIONS:


MATERIALS:

SHELL: STEEL, TIN PLATED
 INSULATOR: UL 94V-0 RATED BLACK
 GLASS-FILLED POLYESTER - UL 94V-0
 CONTACTS: BRASS OR PHOSPHOR BRONZE

ELECTRICALS:

CURRENT RATING: 5 AMPS
 DIELECTRIC STRENGTH: 1000V AC RMS
 INSULATOR RESISTANCE: 1000 MOHMS MIN
 TEMPERATURE: -55°C TO +105°C

182-XXX-21X-XX1
 SERIES _____
 NUMBER OF CONTACTS _____
 GENDER _____
 2 = FEMALE
 PC MOUNT _____
 SHELL _____
 0 = PLASTIC (9 & 25 POSITION ONLY)
 2 = TIN SHELL
 HARDWARE OPTIONS: _____
 (SEE PAGE 2)
 PLATING: _____
 1 = GOLD FLASH

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 9-24-98
			CHECKED:	DATE:
<h1>NorComp</h1>		SCALE: 1:1	SHEET 1 OF 1	REV 8
		DWG NO. 182-XXX-21X-XX1		

DESCRIPTION: R/A HARDWARE OPTIONS

	<p>0.141 ± .020</p> <p>METAL SHELL WITH INSIDE GROUND STRAP</p>	<p>METAL SHELL</p>	<p>METAL SHELL FORK BOARD LOCKS</p>
<p>.120" DIA. HOLE</p>	16	43	N/A
<p>4-40 FLUSH INSERT</p>	17	45	53 BOARD LOCKS IN HOLE
<p>4-40 HEX STANDOFF FEMALE SCREWLOCK</p>	18	48	56 BOARD LOCKS IN HOLE
<p>4-40 ROUND STANDOFF FEMALE SCREWLOCK</p>	N/A	N/A	N/A

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 8-23-98
	<h1>NorComp</h1>		CHECKED: PAM JENKINS	DATE: 8-24-98
SCALE:			SHEET 1 OF 1	REV 6
		DWG NO. 182 HARDWARE		