

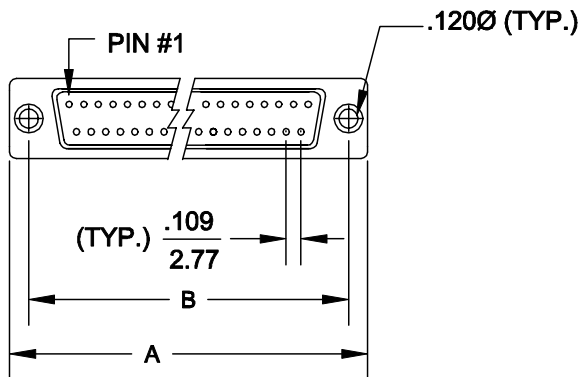


DESCRIPTION: PLASTIC FLAT RIBBON CONNECTOR

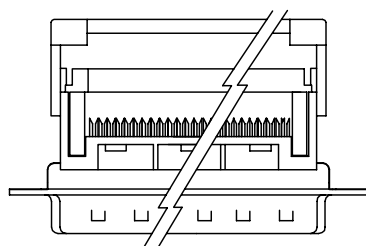

| | A | B | C |
|----|-------|-------|-------|
| 9 | 1.213 | .984 | .707 |
| | 30.81 | 25.00 | 17.96 |
| 15 | 1.541 | 1.312 | .707 |
| | 39.14 | 33.33 | 17.96 |
| 25 | 2.088 | 1.852 | .707 |
| | 53.04 | 47.04 | 17.96 |
| 37 | 2.729 | 2.500 | .707 |
| | 69.32 | 63.50 | 17.96 |

186-XXX-192-XX1

SERIES _____
 POSITIONS _____
 009 _____
 015 _____
 025 _____
 037 _____
 050 _____
 GENDER _____
 1 = MALE _____
 2 = FEMALE _____
 TERMINATION _____
 9 = IDC _____
 SHELL PLATING _____
 2 = TIN _____
 HARDWARE OPTIONS _____
 00 = NO HARDWARE _____
 55 = 4-40 INSERTS _____
 PLATING OPTIONS _____
 01 = GOLD FLASH _____


SPECIFICATIONS:

MATERIALS:

INSULATOR: UL 94V-0 RATED PBT
 +30% FIBER-GLASS OR NYLON-66

ELECTRICALS:

CURRENT RATING: 1 AMP
 CONTACT RESISTANCE: 15 mOHMS MAX
 INSULATOR RESISTANCE: 1000 MOHMS MIN
 VOLTAGE: 500V AC FOR 1 MINUTE
 TEMPERATURE: -50°C TO +100°C

| | | | |
|---|---|----------------------------------|-------------------------|
|  NorComp | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWN: WAYNE ROBBINS | DATE: 9-28-98 |
| | | CHECKED: | DATE: |
| | SCALE: 1:1 | SHEET 1 OF 1 | REV 1 |
| | DWG NO. 186-XXX-192-XX1 | | |