
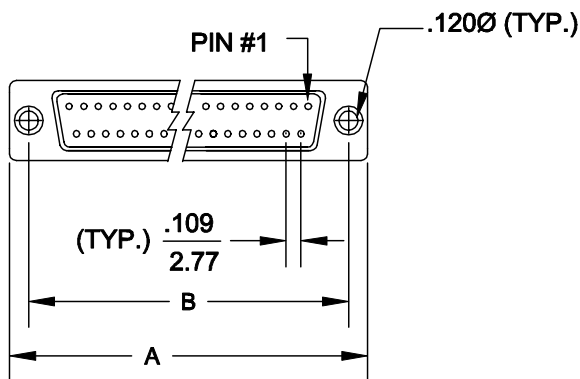


DESCRIPTION: PLASTIC FLAT RIBBON CONNECTOR

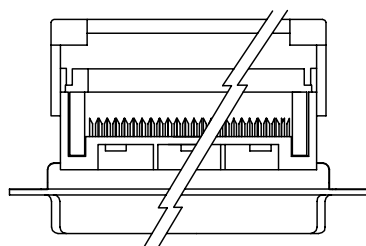

	A	B	C
9	1.213	.984	.707
	30.81	25.00	17.96
15	1.541	1.312	.707
	39.14	33.33	17.96
25	2.088	1.852	.707
	53.04	47.04	17.96
37	2.729	2.500	.707
	69.32	63.50	17.96

186-XXX-292-XX1

SERIES \_\_\_\_\_

POSITIONS \_\_\_\_\_

009 \_\_\_\_\_

015 \_\_\_\_\_

025 \_\_\_\_\_

037 \_\_\_\_\_

050 \_\_\_\_\_

GENDER \_\_\_\_\_

1 = MALE

2 = FEMALE

TERMINATION \_\_\_\_\_

9 = IDC

SHELL PLATING \_\_\_\_\_

2 = TIN

HARDWARE OPTIONS \_\_\_\_\_

00 = NO HARDWARE

55 = 4-40 INSERTS

PLATING OPTIONS \_\_\_\_\_

01 = GOLD FLASH

**SPECIFICATIONS:**

**MATERIALS:**

INSULATOR: UL 94V-0 RATED PBT  
+30% FIBER-GLASS OR NYLON-66

**ELECTRICALS:**


CURRENT RATING: 1 AMP

CONTACT RESISTANCE: 15 mOHMS MAX

INSULATOR RESISTANCE: 1000 MOHMS MIN

VOLTAGE: 500V AC FOR 1 MINUTE

TEMPERATURE: -50°C TO +100°C

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: <b>WAYNE ROBBINS</b>	DATE: <b>9-28-98</b>
			CHECKED:	DATE:
<h1>NorComp</h1>		SCALE: 1:1	SHEET 1 OF 1	REV 1
		DWG NO. <b>186-XXX-292-XX1</b>		