


DESCRIPTION: 15 POS HIGH DENSITY OVER (2) PS/2

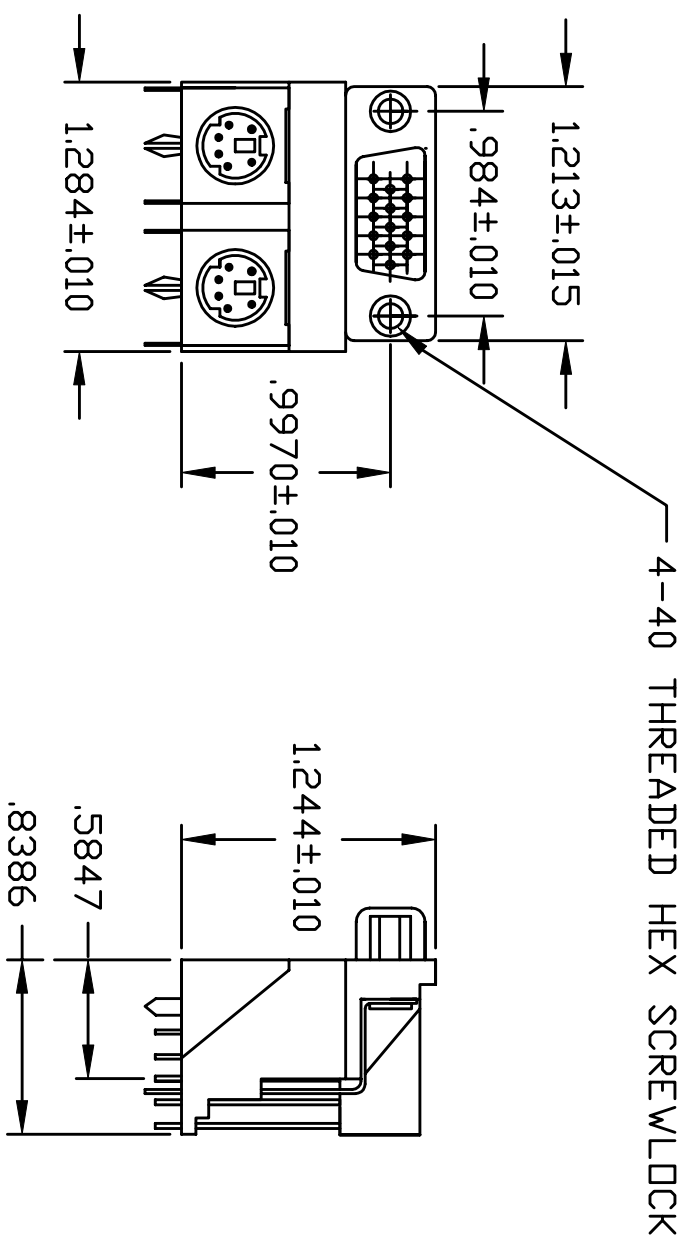

4-40 THREADED HEX SCREWLOCK

**SPECIFICATIONS:**

**ELECTRICAL CHARACTERISTICS:**

- Contact Current Rating: 3 Amperes
- Dielectric Withstanding Voltage: AC 1000V/60 sec. r.m.s.
- Insulation Resistance: 5000 Megohms Minimum DC 500
- Contact Resistance: 25 Milliohms Maximum
- Operating Temperature: -55° to +105°

**MATERIALS:**

- Contacts: Brass
- Insulator: PBT UL 94V-0
- High Density D-sub = Blue
- Mini-Din = Left Port = Purple
- Right Port = Green

Shell: Cold Roll Steel


**PLATING:**

- Contacts: Gold Flash
- Shells: Nickel Plated

**NC**  
 THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF APPARATUS WITHOUT WRITTEN PERMISSION.

**NorComp**

SCALE:	SHEET	OF	REV
	1	2	1
DWG NO. 999-H15-PS2-571	DRAWN: PAM JENKINS		DATE: 4-30-01
CHECKED:	DATE:		

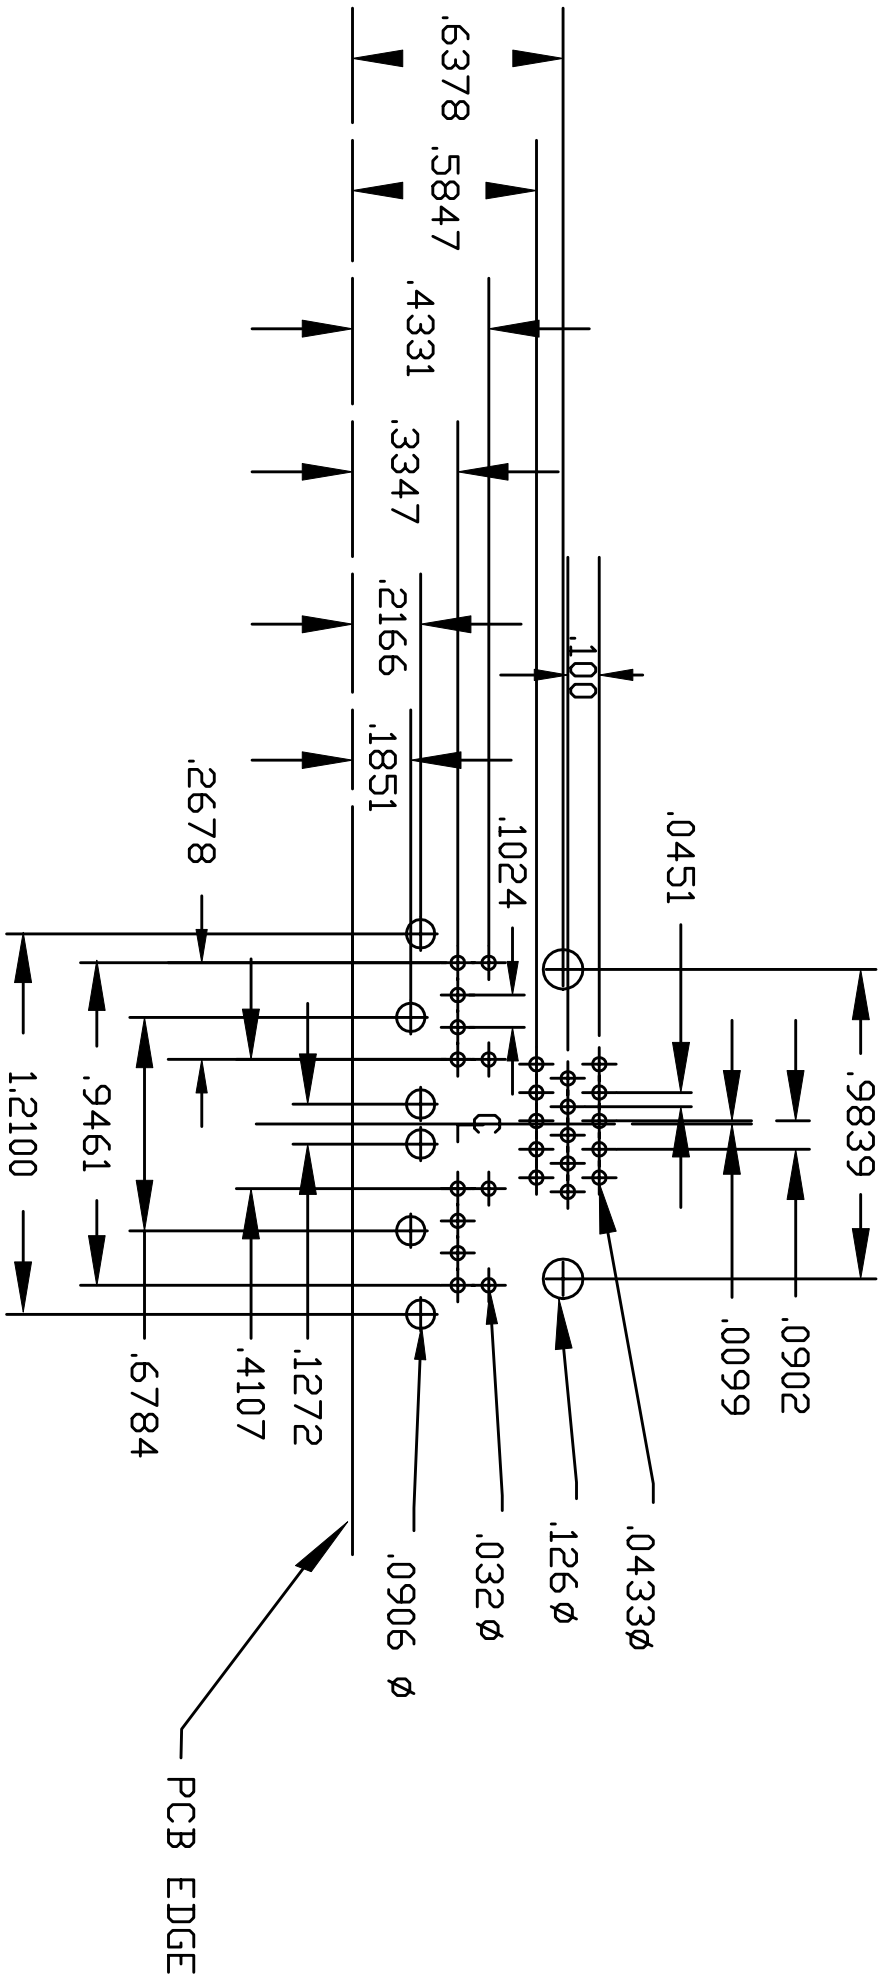

**NC**

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF APPARATUS WITHOUT WRITTEN PERMISSION.

**NorComp**

DRAWN: PAM JENKINS		DATE: 4-25-01	
CHECKED:		DATE:	
SCALE:	SHEET 2 OF 2	REV 3	
DWG NO. 999-H15-PS2-491			