



DESCRIPTION: HIGH DENSITY MALE RIGHT ANGLE

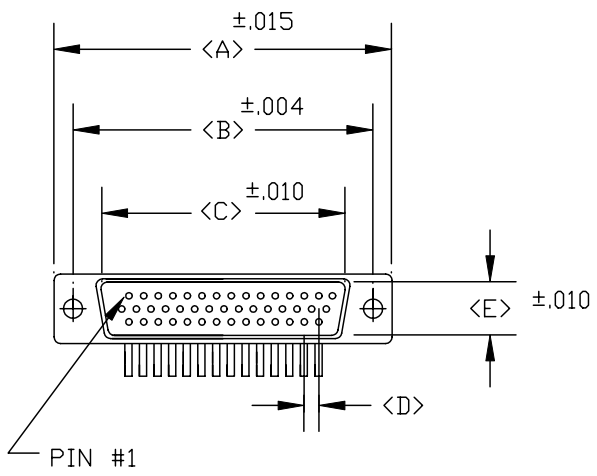

POS.	A	B	C	D	E	F
15	1.213	0.984	0.666	0.090	0.329	0.496
	30.80	24.99	16.92	2.29	8.36	12.60
26	1.543	1.312	0.994	0.090	0.329	0.496
	39.19	33.32	25.25	2.29	8.36	12.60
44	2.087	1.852	1.534	0.090	0.329	0.496
	53.00	47.04	38.96	2.29	8.36	12.60
62	2.740	2.500	2.181	0.095	0.329	0.496
	69.60	63.50	55.42	2.41	8.36	12.60



181-XXX-112-XX1

SERIES _____
 POSITIONS _____
 015 _____
 026 _____
 044 _____
 062 _____

GENDER _____
 1 = MALE

TERMINATION _____
 1 = DIP SOLDER


SHELL PLATING _____
 2 = TIN

HARDWARE OPTIONS _____
 00 = NO HARDWARE
 16 = .120"Ø/INSIDE GRND STRAPS
 17 = 4-40 INSERTS/INSIDE GRND STRAPS
 18 = 4-40 SCREWLOCKS/INSIDE GRND STRAPS
 43 = .120"Ø/METAL SHELL
 45 = 4-40 INSERTS/METAL SHELL
 48 = 4-40 SCREWLOCKS/METAL SHELL
 53 = 4-40 INSERT/BOARD LOCKS
 56 = 4-40 SCREWLOCKS/BOARDLOCKS

PLATING OPTIONS _____
 1 = GOLD FLASH ENTIRE CONTACT

ELECTRICALS:
 CURRENT RATING: 2 AMPS
 CONTACT RESISTANCE: 15 mOHMS MAX.
 INSULATOR RESISTANCE: 1000MOHMS MIN.
 VOLTAGE: 500V FOR 1 MINUTE
 TEMPERATURE: -50° TO +100°

MATERIALS:
 SHELL: STEEL, TIN PLATED
 INSULATOR: PBT - BLACK (UL-94-VO)
 CONTACTS: BRASS - GOLD FLASH ENTIRE CONTACT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 8-19-99
				CHECKED:
NorComp		SCALE:	SHEET OF	REV 6
		DWG NO. 181-XXX-112-XX1		

