





10 9 8 7 6 5 4 3 2 1

**TECHNICAL SPECIFICATIONS:**

**MATERIAL :**

HOUSING TYPE 1: POLYESTER GLASS FILLED UL 94V0  
 COLOR BLACK  
 HOUSING TYPE 2: POLYAMIDE HIGH TEMPERATURE GLASS  
 FILLED UL 94V0 COLOR BLACK  
 TERMINAL : PHOSPHOR BRONZE PLATED WITH :  
 (0.00127)/.000050 MIN. GOLD IN CONTACT AREA,  
 (0.00190)/.000075 MIN. PURE TIN IN TAIL AREA,  
 BOTH OVER (0.00127)/.000050 MIN. NICKEL OVERALL  
 SHIELD : BRASS PLATED WITH (0.0020)/.000078 MIN. TIN.

ENG. N°.	HOUSING SIZE	HOUSING MATERIAL TYPE	LOADED CKTS	PANEL GROUND	TOOLED	PACKAGING SPECIFICATION PK-95122
95122-2881	8	1	8	NO	YES	TRAY (SHEET 1)
95122-2882				YES	YES	BLISTER (SHEET 2)
95122-2883		2		NO	YES	TRAY (SHEET 1)

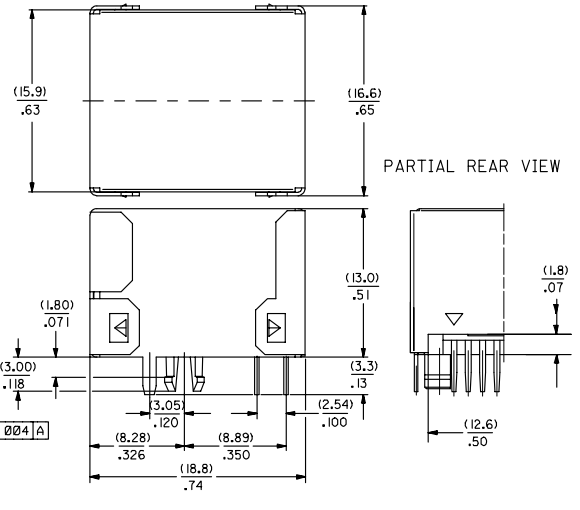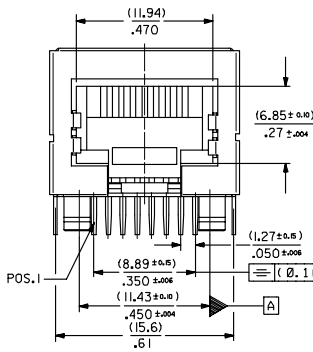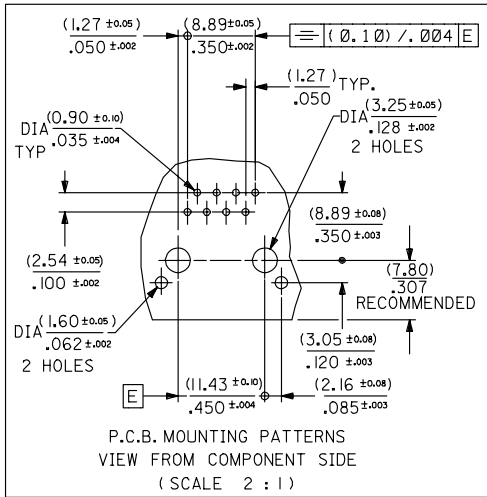

**NOTES:**

- 1- JACK FOR MATING WITH SHIELDED PLUG MOLEX 95043 AND 85568 SERIES.
- 2- PRODUCT SPECIFICATION: MOLEX PS-95122.
- 3- APPLICATION SPECIFICATION: MOLEX AS-9500L.
- 4- PACKAGING SPECIFICATION: MOLEX PK-95122 (SEE CHART)
- 5- P.C. BOARD THICKNESS : (.157)/.062

ENTER DESCRIPTION EC NO. M62005-0122 DRAWN BY DRW:KIDOLLER 2004/10/08 CHECKED BY CHK:FCARBET 2004/10/08 APPROVED BY APPR:KIDOLLER 2004/10/08	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE MM/IN	SCALE 3:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	▽=0 ▽=0	4 PLACES ± --- ± --- 3 PLACES ± --- ± .10 2 PLACES ± 0.25 ± .014 1 PLACE ± 0.35 ± --- ANGULAR ± 2 °	DRAWN BY GP DATE 93/04/20 CHECKED BY FB DATE 93/04/20 APPROVED BY JB DATE 93/04/20	TITLE	FULLY SHIELDED R/A MODULAR JACK 8 CKTS THROUGH HOLE - VERSION A MOLEX INCORPORATED	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART	MATERIAL NO.	DOCUMENT NO.	SHEET NO. 1 OF 3	
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

9 8 7 6 5 4 3 2 1