

4



3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	QTY	REV	DESCRIPTION	DATE	BY	APP
AA	22	F	LWR			
		B	REV, EC 0502-0432-97	30.JUL.97	OLD	JT

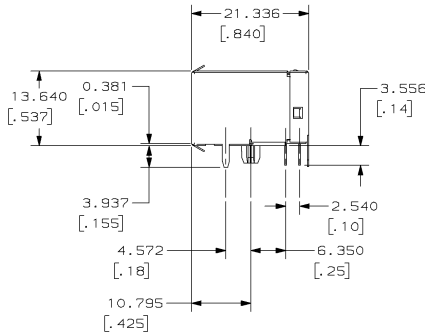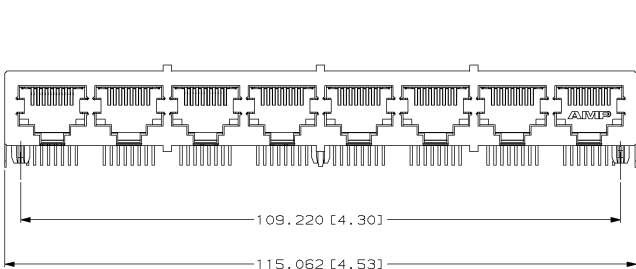

- △ MATERIAL: HOUSING-PCT POLYESTER, BLACK, IR COMPATIBLE, UL 94V-0. TERMINALS-0.33(.013) THICK PHOS BRONZE PLATED WITH 1.27µm (.000050) MINIMUM HARD GOLD IN LOCALIZED AREA AND 3.81µm (.000150) MINIMUM TIN-LEAD SOLDER AREA OVER 1.27µm (.000050) MINIMUM NICKEL UNDERPLATE. SHIELD-0.254 (.010) THICK COPPER ALLOY PLATED WITH 2.03µm (.000080) MINIMUM TIN-LEAD OVER 2.54µm (.000100) MINIMUM COPPER.
- △ JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
- 3. ALL DIMENSIONS ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
- △ CAUTION: CATEGORY 5 JACK SOLDER TAIL POSITIONS DO NOT FOLLOW SAME NUMBER SEQUENCE AS THAT OF THE TRADITIONAL JACKS.

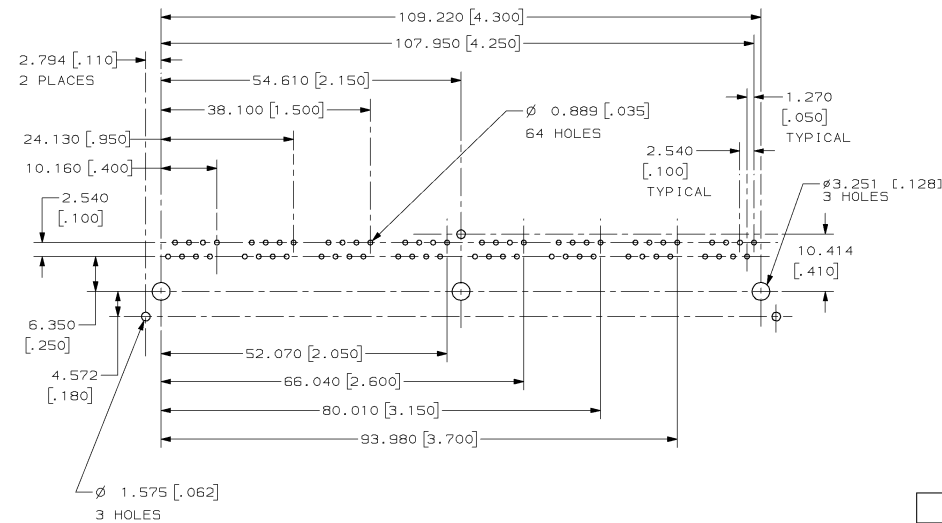

SUGGESTED PC BOARD LAYOUT
 COMPONENT SIDE
 SEE APPLICATION SPECIFICATION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.		DIM: S. LONG CHK: S. FOX DATE: 10MAR94	558526-1 PART NO.
DIMENSIONS: mm (INCHES)	DIMENSIONS SPECIFIED:	AMP INCORPORATED HARRISBURG, PA 17105-3608	AMP
0 PLG ±.012 1 PLG ±.015 2 PLG ±.020 3 PLG ±.025 4 PLG ±.030 ANGLES ±.010	0 PLG ±.012 1 PLG ±.015 2 PLG ±.020 3 PLG ±.025 4 PLG ±.030 ANGLES ±.010	PRODUCT SPEC: 108-1392 APPLICATION SPEC: 114-2048 WEIGHT: -	MODULAR JACK ASSEMBLY, 8 PORT, 8 POSITION, RIGHT ANGLE, CATEGORY 5
MATERIAL: △	FINISH: △	SIZE: A2 CASE CODE: 00779 DRAWING NO: 558526	SCALE: 2:1 SHEET: 1 OF 1 REV: B
CUSTOMER DRAWING			

558526