
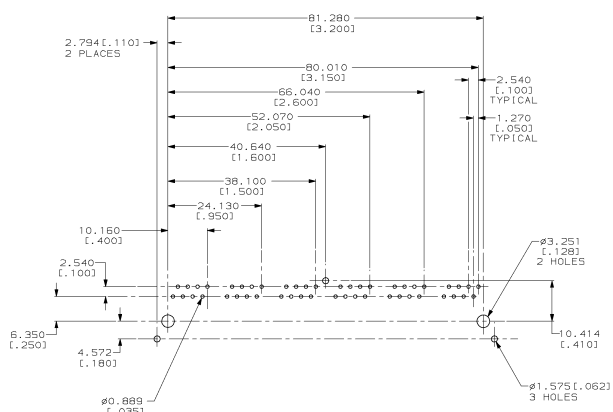




THIS DRAWING IS UNCLASSIFIED	EXCEPT FOR PORTION
CONTROL IS	BY AMP INCORPORATED. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHK	APP
AA	22				
B		REV. EC 0502-0432-97			

- △ MATERIAL: HOUSING PCT POLYESTER, BLACK, IR COMPATIBLE, UL 94V-0.
TERMINALS - 0.33 (.013) THICK PHOS BRONZE PLATED WITH 1.27µm (.000050) MINIMUM HARD GOLD IN LOCALIZED AREA AND 3.81µm (.000150) MINIMUM TIN-LEAD IN SOLDER AREA OVER 1.27µm (.000050) MINIMUM NICKEL UNDERPLATE. SHIELD - 0.254 (.010) THICK COPPER ALLOY PLATED WITH 2.03µm (.000080) MINIMUM TIN-LEAD OVER 2.54µm (.000100) MINIMUM COPPER.
- △ JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
- 3. ALL DIMENSIONS ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
- △ CAUTION: CATEGORY 5 JACK SOLDER TAIL POSITIONS DO NOT FOLLOW SAME NUMBER SEQUENCE AS THAT OF THE TRADITIONAL JACKS.

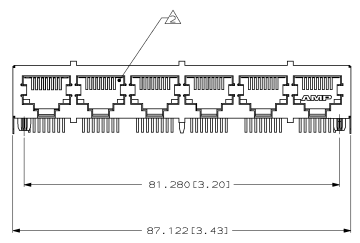

SUGGESTED PC BOARD LAYOUT
COMPONENT SIDE
SEE APPLICATION SPECIFICATION



○ TRADITIONAL JACK △ CATEGORY 5 JACK

AMP INCORPORATED HARRISBURG, PA 17105-3608	
ORDERING INFORMATION: AMP CODES: 108-1392 114-2048	PART NUMBER: A1 00779 CUSTOMER DRAWING