

4



3

2

1



THIS DRAWING IS UNPUBLISHED.
 RELEASED FOR PUBLICATION
 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	QTY	REV	DESCRIPTION	DATE	BY	APP
AA	22	B	REV, EC 0502-0027-96	02JAN97	DS	EL

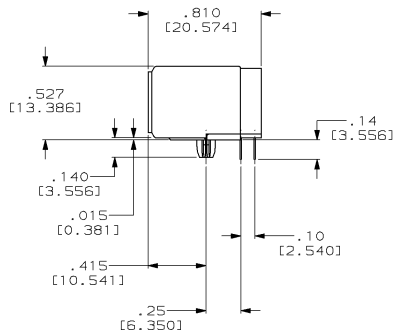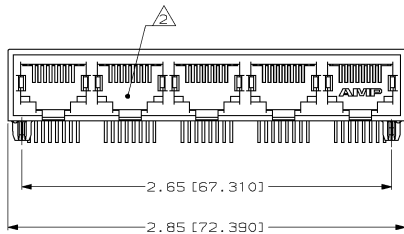

△ MATERIAL: HOUSING-HTN NYLON, BLACK, IR REFLOW PROCESSING COMPATIBLE, UL 94V-0. TERMINALS-.013[0.33] THICK PHOS BRONZE PLATED WITH .000050 [1.27μm] THICK HARD GOLD IN LOCALIZED AREA AND .000150 [3.18μm] THICK TIN-LEAD IN SOLDER AREA OVER .000050 [1.27μm] THICK NICKEL UNDERPLATE.

- △ JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
- ALL DIMENSIONS SHOWN ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
 - ALL DIMENSIONS SHOWN IN BRACKETS [] ARE IN MILLIMETERS.

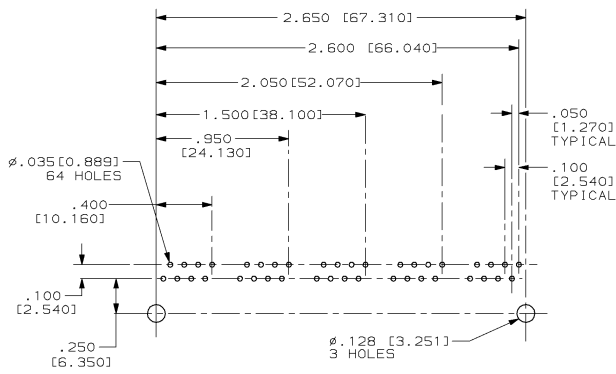

SUGGESTED PANEL CUTOUT

SUGGESTED PC BOARD LAYOUT
 COMPONENT SIDE
 SEE APPLICATION SPECIFICATION

557563-1
 PART NO.

DIMENSIONS: INCHES (mm)		DIMENSIONS SPECIFIED: 0 PLC ±.0010 (0.2541) 1 PLC ±.0005 (0.127) 4 PLC ±.0010 (0.2541)		DIMENSIONS TYPICAL: 0 PLC ±.0010 (0.2541) 1 PLC ±.0005 (0.127) 4 PLC ±.0010 (0.2541)		DIMENSIONS UNLESS OTHERWISE SPECIFIED: 0 PLC ±.0010 (0.2541) 1 PLC ±.0005 (0.127) 4 PLC ±.0010 (0.2541)		DIMENSIONS UNLESS OTHERWISE SPECIFIED: 0 PLC ±.0010 (0.2541) 1 PLC ±.0005 (0.127) 4 PLC ±.0010 (0.2541)		DIMENSIONS UNLESS OTHERWISE SPECIFIED: 0 PLC ±.0010 (0.2541) 1 PLC ±.0005 (0.127) 4 PLC ±.0010 (0.2541)	
MATERIAL: △		FINISH: △		DIM: V. SLACK 31JAN92 CK: D. FOX GRAM62 APP: S. REED PRODUCT SPEC: 108-1392 APPLICATION SPEC: 114-2048 WEIGHT: -		AMP Incorporated Harrisburg, PA 17105-3608		AMP		MODULAR JACK ASSEMBLY, FIVE PORT, 8 POSITION, RIGHT ANGLE SIZE: A2 CASE CODE: 00779 DRAWING NO: 557563	
CUSTOMER DRAWING				SCALE: 2:1		SHEET: 1 OF 1		REV: B		557563-1 PART NO.	

557563

B

A