

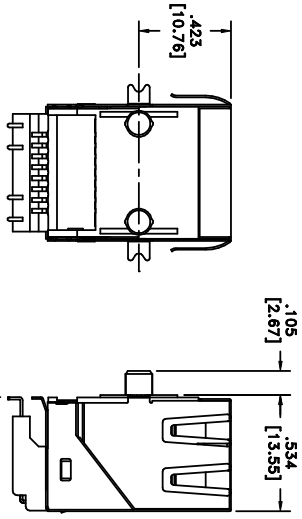


SOLDER SUFFIX	CUSTOMER TERMINAL	ROHS	LEAD(Pb)-FREE
LF3	Sn100K	Yes	No

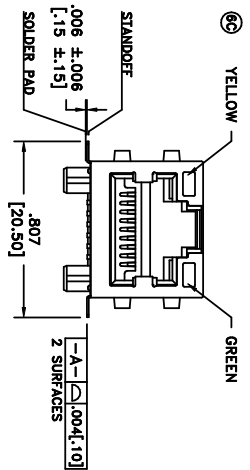

.004(.10) -A-  
12 SURFACES

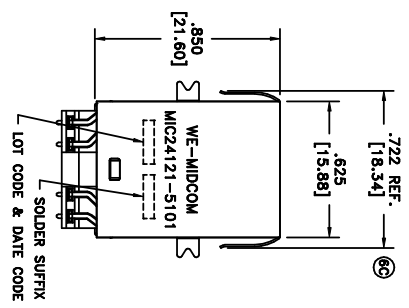

**ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:**

INDUCTANCE: 350uH min., 100kHz, 100mV, 5mA DC, J1-J2, J3-J6, 1p.

DIELECTRIC RATING: 1500Vrms for 1 minute between P1-J1(tie P1+P4).

TURNS RATIO/POLARITY: (P1-P3):(J1-J2) = 1:1, ±2%.  
(P4-P6):(J3-J6) = 1:1, ±2%.


INSERTION LOSS: -1.0dB max., 1MHz - 100MHz.

RETURN LOSS: -16dB min., 1M - 30MHz.  
-16dB min., 30M - 45MHz.  
-14dB min., 45M - 60MHz.  
-12dB min., 60M - 80MHz.

CROSSTALK: -35dB min., 1MHz - 100MHz.

COMMON MODE REJECTION: -35dB min., 1MHz - 100MHz.

OPERATING TEMPERATURE RANGE: 0°C to +70°C.

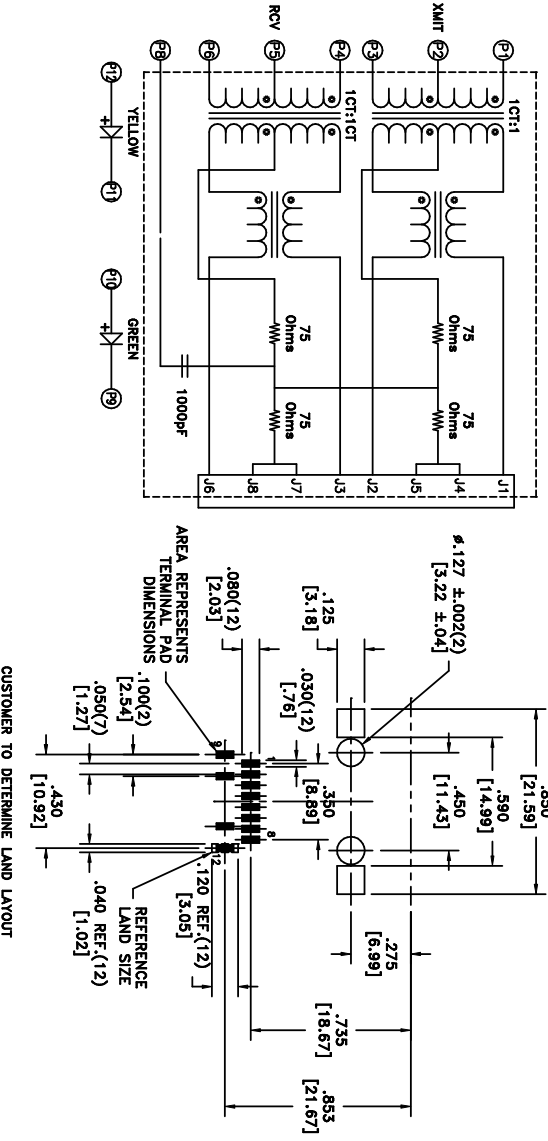

CUSTOMER TO DETERMINE LAND LAYOUT

Unless otherwise specified:  
Tolerances: Fractions: ±1/64  
Angles: ±1° Decimals: ±.010[.25]  
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE  
**TRANSFORMER**  
10/100Mbs

MIDCOM INC.  
www.midcom-inc.com

REVISIONS: SEE SHEET 1

DRAWING NO.  
**MIC24121-5101W-LF3**

AGENCY NUMBER  
UL60950-1 E209830

SCALE ---

SHEET 2 OF 6