







MECHANICAL:



Pin Designations

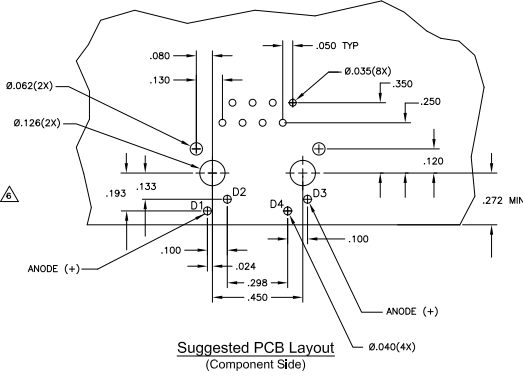

Suggested PCB Layout (Component Side)

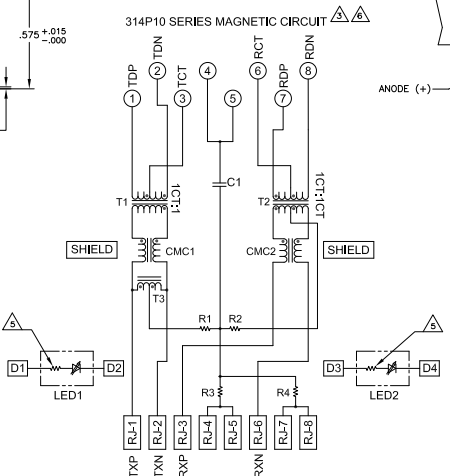

C1=1000pF 2kV CAPACITOR
 R1-R4 = 75 OHMS, 1/16 W RESISTORS

REV	DATE	DESCRIPTION	BY	CHK	APP
AA	22				
C		REV PER ECO-08-026081			CHSP2208 RQ TX
C1		REVISED PER ECO-09-024927			090909 KK AEG

MATERIALS:
 HOUSING - THERMOPLASTIC PET POLYESTER FLAMMABILITY RATING UL 94V-0.
 SHIELD - .010" THICK, C26800 BRASS PREPLATED WITH 30μINCH SEMI-BRIGHT NICKEL. SOLDER TABS POST DIPPED WITH 100μINCH MIN SAC SOLDER.
 MOD JACK CONTACTS - 0.015" x 0.018" PHOSPHOR BRONZE, 50μINCH MIN OVERALL NICKEL UNDERPLATE, WITH SELECT 50μINCH MIN HARD GOLD FINISH PLATE SOLDER TAILS WITH 100μINCH MIN MATTE TIN AND/OR SAC SOLDER DIP.
 LIGHT EMITTING DIODE(LED) - DIFFUSED EPOXY LENS, .020" x .020" CARBON STEEL WIREFRAME LEADS PRE-PLATED WITH 80μINCH SILVER OVER 40μINCH NICKEL UNDERPLATE OVER 40μINCH COPPER UNDERPLATE. POST-PLATED WITH 100μINCH MIN MATTE TIN AND/OR SAC SOLDER DIP OR PURE TIN SOLDER DIP.

RJ-5 JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUB PART F.

MAGNETICS:
 -IMPEDANCE: 100 OHMS
 -TURNS RATIO (C/P: CABLE): TX = 11, RX = 11
 -OPEN CIRCUIT INDUCTANCE (OCL): 350μH MIN @100kHz, 0.1VRMS, 8mADC BIAS FROM 0°C TO 70°C, TX AND RX
 -PERFORMANCE @ 25°C
 INSERTION LOSS (IL): 11dB MAX FROM 0.5MHz TO 100MHz
 RETURN LOSS (RL): 18dB MIN FROM 0.5MHz TO 30MHz
 18-20LOG(F/30)dB MIN FROM 30.1MHz TO 60MHz
 12dB MIN FROM 60.1MHz TO 80MHz
 CROSSTALK ATTENUATION: 35dB MIN FROM 0.5MHz TO 40MHz
 23-20LOG(F/50)dB MIN FROM 4.0MHz TO 100MHz
 COMMON MODE REJECTION RATIO (CMRR): 30dB MIN FROM 0.5MHz TO 100MHz
 -ISOLATION VOLTAGE: COMPLIES WITH IEEE802.3 2002, PARA 23.5.1.1, ITEM D.

4. OPERATING TEMPERATURE: FROM 0°C TO -70°C.

THE 250 OHM LED RESISTORS ARE OPTIONAL, PLEASE SEE CHART FOR PRESENCE OR ABSENCE OF LED RESISTORS. IF THE LED WITHOUT 250 OHM RESISTORS, LED IS DRIVEN WITH CONSTANT CURRENT AT APPROX 20mA
 LED COLOR - DOMINANT WAVELENGTH (λD): GREEN 568 nm TYP @ IF=20mA
 FORWARD VOLTAGE (VF): YELLOW 2.2V TYP @ IF=20mA
 DOMINANT WAVELENGTH (λD): GREEN 588 nm TYP @ IF=20mA
 FORWARD VOLTAGE (VF): YELLOW 2.2V TYP @ IF=20mA
 IF THE LED WITH 250 OHM RESISTORS, LED IS DRIVEN WITH 5V VOLTAGE AND THE MAX OPERATING CURRENT IS 20mA
 LED COLOR - DOMINANT WAVELENGTH (λD): GREEN 568 nm TYP @ VF=5V
 FORWARD CURRENT (IF): GREEN 12 mA TYP @ VF=5V
 DOMINANT WAVELENGTH (λD): YELLOW 588 nm TYP @ VF=5V

INDICATED CONNECTIONS ARE FOR NIC CONFIGURATION. THE MAGNETICS ARE ASYMMETRICAL, AND DO NOT SUPPORT AUTO-MDI/MDIX.

TYCO ELECTRONICS LOGO, PART NUMBER, DATE CODE, COUNTRY OF ORIGIN AND AGENCY APPROVAL MARKING IN APPROXIMATE LOCATION SHOWN.

THESE PARTS ARE RECOMMENDED FOR WAVE SOLDERING PROCESS. PREHEAT TEMPERATURE IS 120°C TO 160°C, 120 SECONDS TO 180 SECONDS. PEAK SOLDERING TEMPERATURE IS 260 °C MAX, 10 SECONDS MAX.

OBsolete PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

GREEN	NO	YELLOW	NO	5-6605301-B
OBsolete	GREEN	NO	GREEN	NO
GREEN	YES	YELLOW	YES	5-6605301-7
GREEN	YES	YELLOW	YES	5-6605301-1

REV	DATE	DESCRIPTION	BY	CHK	APP
AA	22				
C		REV PER ECO-08-026081			CHSP2208 RQ TX
C1		REVISED PER ECO-09-024927			090909 KK AEG

THIS DRAWING IS A CONTROLLED DOCUMENT.		ATTACHMENT CONTROL		TYCO ELECTRONICS CORPORATION	
REVISIONS	DESCRIPTION	DATE	BY	CHK	APP
1	1X1 MAG45(TN), 4N2P10 10/100 ETHERNET SCHEMATIC, 314P10 MAGNETIC CIRCUIT, SHIELDED, DECOUPLING CAPACITOR, WITH LEDS	108-2100			
DATE	ISSUE	ISSUED BY	ISSUED FOR	REVISIONS	REVISIONS
AA	1	AA	100779	5-6605301	
CUSTOMER DRAWING		DATE		SCALE	
		1:1		1:1	